

KR series


Power rocker switches

New!

Distinctive features

UG1006-A

Attractive rugged rocker switch

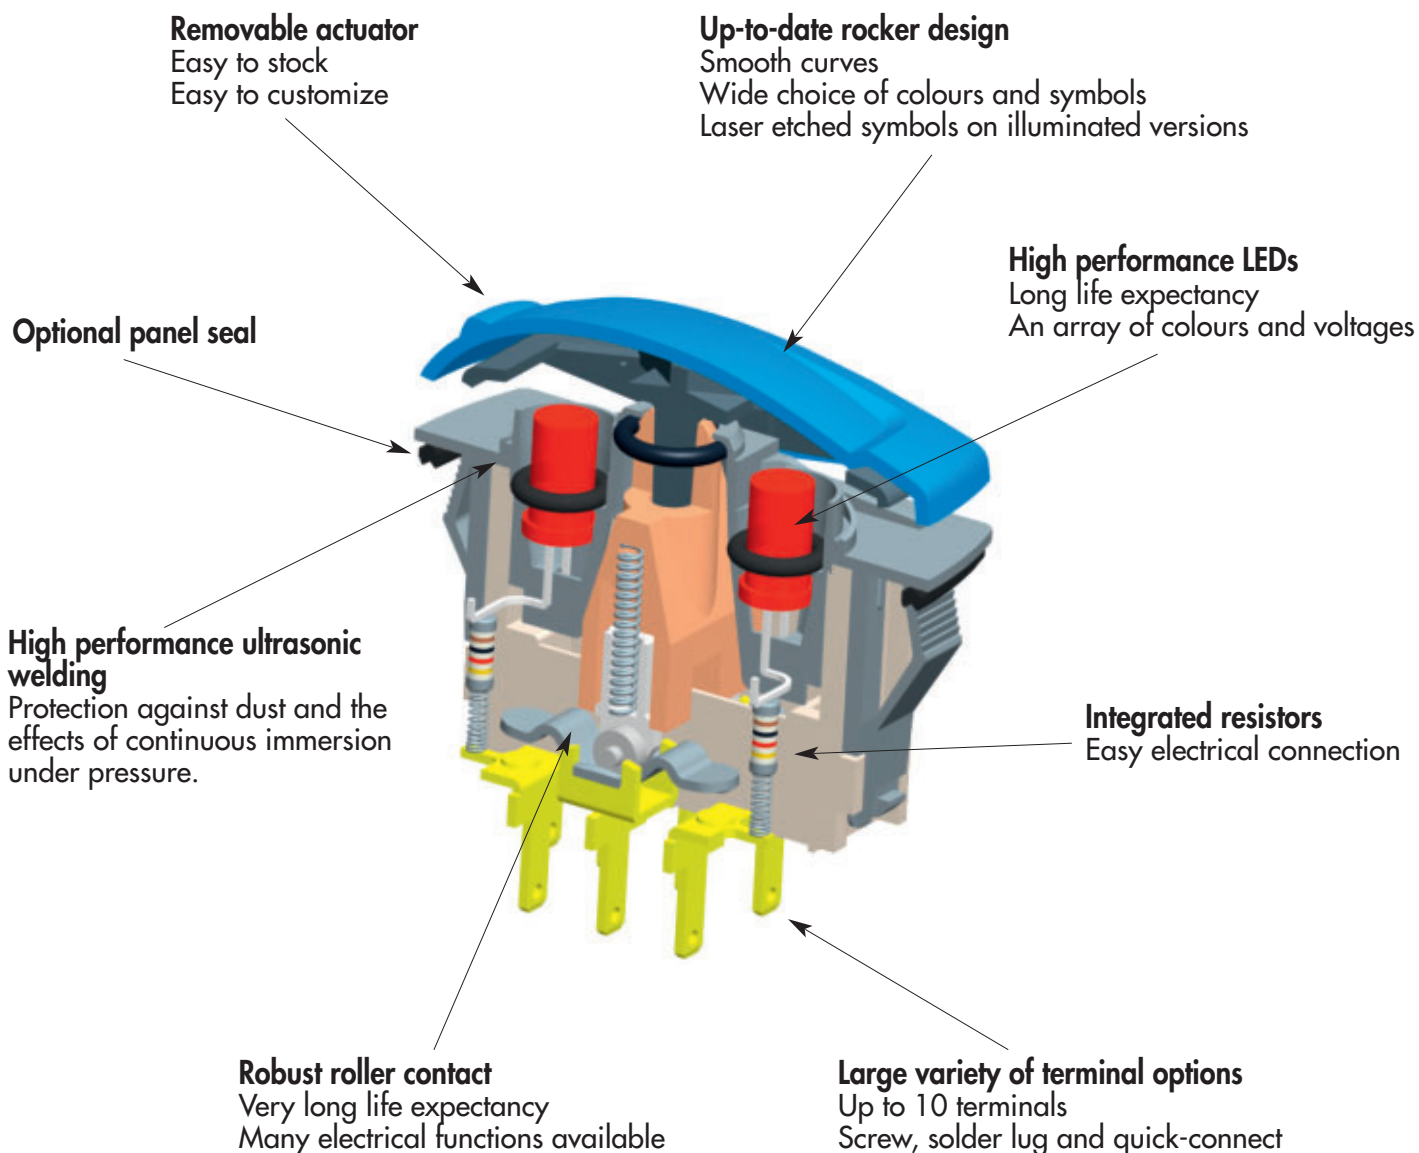

APEM will be happy to develop custom product solutions. Please contact us with your requirements.

New!

Power rocker switches

Specifications



- Unique rocker design
- Wide choice of colours
- Laser etched symbols
- Illuminated or non-illuminated
- Optionally sealed to IP68

ELECTRICAL SPECIFICATIONS

- Current/voltage rating with resistive load :
 - Silver contacts (A) : 5A 24VDC, 100.000 cycles
10A 24VDC, 10.000 cycles (terminals 6.35 x 0.8 only)
 - Gold plated contacts (D) : 20mA 12V, 150.000 cycles
- Initial contact resistance : 10 mΩ max.
- Insulation resistance : 1.000 MΩ min. at 500VDC
- Dielectric strength : 2.000 Vrms 50 Hz min. between terminals
- Mechanical life : 150.000 cycles min.

MATERIALS

- Case : PA 6-6
- Actuator : ABS
- Bezel : PA 6-6
- Terminals : brass, silver plated
- Contacts : silver (A)
or silver, gold plated (D)
- Contact roller : brass, nickel plated


ENVIRONMENTAL SPECIFICATIONS

- Degree of protection of sealed versions : frontal sealing to IP68 according to IEC 60529 (submersion under 1 meter of water for more than 30 minutes)
- Salt spray resistance : 96 hours according to IEC 512-6, test 11f
- Vibration resistance : 10-500 Hz / 10 g per IEC 60068-2-6
- Operating temperature : -40°C to +85°C

SEALING

Sealing is optional.
To order a sealed product, complete the appropriate box of ordering format on the following pages.

DIMENSIONS

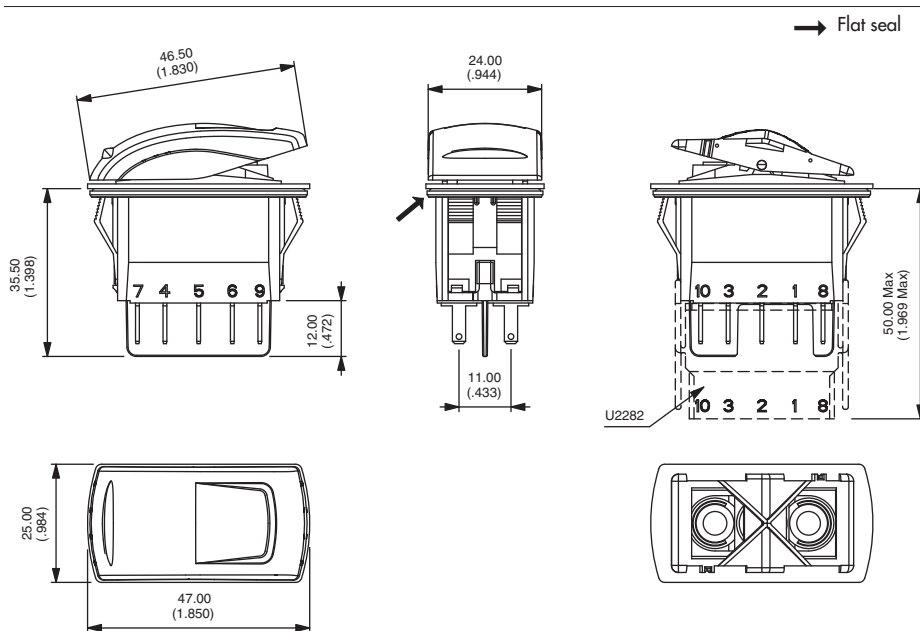

Packaging unit : 40 pieces

Dimensions : First dimensions are in mm while inches are shown as bracketed numbers.

KR series

Power rocker switches

New!

Selection guide

HOW TO ORDER

- To order a complete product, fill in all the boxes of the following order guide.
- To order case only (without actuator), finish your order number with the LED wiring code.
- To order actuator only (without case), begin the order number with code KRR, then follow the order format from "actuator type" until the end of the options.

CASE + LEADS

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|----------------------|---|--------------------------|---------------------------------|------------------|------------------------------|---|--------------|-------------------------|----------|--------------------------|---------------------------------|----------------------|----------|---|-------------------------------|-------------------------|----------|--------------------------|---|-------------------------------|----------|---|-------------------------------|----------|-----------------------|--------------------------|---|-------------------------------|---------------------------------------|------------------------------|-------------------------|----------|-----------------------|---|----------------------|-------------|---|------------------------------|---|---------------|-----------------------|-----------------------|------------------------|----------------------|---|----------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|
| KR | | | | | | | Side A | Side B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SERIES | Electrical functions | | | Contacts | Sealing | LEDS | | Wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Poles | <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">1</td><td style="width: 10%;">ON</td><td style="width: 10%;">-</td><td style="width: 10%;">OFF</td></tr> <tr> <td>4</td><td>ON</td><td>ON</td><td>ON</td></tr> <tr> <td>4-1R</td><td>ON</td><td>ON</td><td>MOM</td></tr> <tr> <td>5</td><td>MOM</td><td>-</td><td>ON</td></tr> <tr> <td>6</td><td>ON</td><td>-</td><td>ON</td></tr> <tr> <td>7</td><td>MOM</td><td>OFF</td><td>MOM</td></tr> <tr> <td>8</td><td>ON</td><td>OFF</td><td>MOM</td></tr> <tr> <td>9</td><td>ON</td><td>OFF</td><td>ON</td></tr> </table> <p>Function 1 only for 6-terminal versions. Functions 5 and 6 cannot be combined with "H" wiring.</p> | | | 1 | ON | - | OFF | 4 | ON | ON | ON | 4-1R | ON | ON | MOM | 5 | MOM | - | ON | 6 | ON | - | ON | 7 | MOM | OFF | MOM | 8 | ON | OFF | MOM | 9 | ON | OFF | ON | <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">A Silver</td> <td style="width: 50%;">X No</td> </tr> <tr> <td>D Gold plated</td> <td>K Yes</td> </tr> </table> | A Silver | X No | D Gold plated | K Yes | <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">X None</td> <td style="width: 50%;">A LED 6V red</td> </tr> <tr> <td>B LED 6V green</td> <td>C LED 6V yellow</td> </tr> <tr> <td>M LED 6V blue</td> <td>R LED 6V white</td> </tr> <tr> <td>D LED 12V red</td> <td>E LED 12V green</td> </tr> <tr> <td>F LED 12V yellow</td> <td>N LED 12V blue</td> </tr> <tr> <td>S LED 12V white</td> <td>J LED 24V red</td> </tr> <tr> <td>K LED 24V green</td> <td>L LED 24V yellow</td> </tr> <tr> <td>P LED 24V blue</td> <td>T LED 24V white</td> </tr> </table> | X None | A LED 6V red | B LED 6V green | C LED 6V yellow | M LED 6V blue | R LED 6V white | D LED 12V red | E LED 12V green | F LED 12V yellow | N LED 12V blue | S LED 12V white | J LED 24V red | K LED 24V green | L LED 24V yellow | P LED 24V blue | T LED 24V white | See following pages. |
| 1 | | | | ON | - | OFF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | ON | ON | ON | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4-1R | ON | ON | MOM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | MOM | - | ON | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | ON | - | ON | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | MOM | OFF | MOM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | ON | OFF | MOM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | ON | OFF | ON | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A Silver | X No | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D Gold plated | K Yes | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X None | A LED 6V red | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B LED 6V green | C LED 6V yellow | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| M LED 6V blue | R LED 6V white | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D LED 12V red | E LED 12V green | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| F LED 12V yellow | N LED 12V blue | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S LED 12V white | J LED 24V red | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| K LED 24V green | L LED 24V yellow | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P LED 24V blue | T LED 24V white | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">3 Single pole</td> <td style="width: 50%;">4 Double pole</td> </tr> </table> | 3 Single pole | 4 Double pole | <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Terminals</td> <td style="width: 50%;">Terminals (continued)</td> </tr> <tr> <td style="border: 1px solid black;"> <table style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">Screw</td> </tr> <tr> <td>0</td><td>6 terminals with barrier</td> </tr> <tr> <td colspan="2">Solder lug/quick-connect</td> </tr> <tr> <td>2</td><td>6 terminals with barrier</td> </tr> <tr> <td>4</td><td>6 terminals w/o barrier</td> </tr> <tr> <td>A</td><td>10 term. with barrier</td> </tr> <tr> <td>B</td><td>10 term. w/o barrier</td> </tr> <tr> <td>C</td><td>10 terminals for use with connector U2292</td> </tr> <tr> <td colspan="2">Quick-connect 6,35x0,8</td> </tr> <tr> <td>3</td><td>6 terminals with barrier</td> </tr> </table> </td> <td style="border: 1px solid black;"> <table style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">Quick-connect 6,35x0,8</td> </tr> <tr> <td>5</td><td>6 terminals w/o barrier</td> </tr> <tr> <td>D</td><td>10 term. with barrier</td> </tr> <tr> <td>E</td><td>10 term. w/o barrier</td> </tr> <tr> <td>F</td><td>10 term. for use with connector U2292</td> </tr> <tr> <td colspan="2">Quick-connect 2,8x0,8</td> </tr> <tr> <td>G</td><td>10 term. with barrier</td> </tr> <tr> <td>H</td><td>10 term. w/o barrier</td> </tr> <tr> <td>J</td><td>10 terminals for use with connector U2282</td> </tr> </table> </td> </tr> </table> | | | Terminals | Terminals (continued) | <table style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">Screw</td> </tr> <tr> <td>0</td><td>6 terminals with barrier</td> </tr> <tr> <td colspan="2">Solder lug/quick-connect</td> </tr> <tr> <td>2</td><td>6 terminals with barrier</td> </tr> <tr> <td>4</td><td>6 terminals w/o barrier</td> </tr> <tr> <td>A</td><td>10 term. with barrier</td> </tr> <tr> <td>B</td><td>10 term. w/o barrier</td> </tr> <tr> <td>C</td><td>10 terminals for use with connector U2292</td> </tr> <tr> <td colspan="2">Quick-connect 6,35x0,8</td> </tr> <tr> <td>3</td><td>6 terminals with barrier</td> </tr> </table> | Screw | | 0 | 6 terminals with barrier | Solder lug/quick-connect | | 2 | 6 terminals with barrier | 4 | 6 terminals w/o barrier | A | 10 term. with barrier | B | 10 term. w/o barrier | C | 10 terminals for use with connector U2292 | Quick-connect 6,35x0,8 | | 3 | 6 terminals with barrier | <table style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">Quick-connect 6,35x0,8</td> </tr> <tr> <td>5</td><td>6 terminals w/o barrier</td> </tr> <tr> <td>D</td><td>10 term. with barrier</td> </tr> <tr> <td>E</td><td>10 term. w/o barrier</td> </tr> <tr> <td>F</td><td>10 term. for use with connector U2292</td> </tr> <tr> <td colspan="2">Quick-connect 2,8x0,8</td> </tr> <tr> <td>G</td><td>10 term. with barrier</td> </tr> <tr> <td>H</td><td>10 term. w/o barrier</td> </tr> <tr> <td>J</td><td>10 terminals for use with connector U2282</td> </tr> </table> | Quick-connect 6,35x0,8 | | 5 | 6 terminals w/o barrier | D | 10 term. with barrier | E | 10 term. w/o barrier | F | 10 term. for use with connector U2292 | Quick-connect 2,8x0,8 | | G | 10 term. with barrier | H | 10 term. w/o barrier | J | 10 terminals for use with connector U2282 | | | | | | | | | | | |
| 3 Single pole | 4 Double pole | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Terminals | Terminals (continued) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">Screw</td> </tr> <tr> <td>0</td><td>6 terminals with barrier</td> </tr> <tr> <td colspan="2">Solder lug/quick-connect</td> </tr> <tr> <td>2</td><td>6 terminals with barrier</td> </tr> <tr> <td>4</td><td>6 terminals w/o barrier</td> </tr> <tr> <td>A</td><td>10 term. with barrier</td> </tr> <tr> <td>B</td><td>10 term. w/o barrier</td> </tr> <tr> <td>C</td><td>10 terminals for use with connector U2292</td> </tr> <tr> <td colspan="2">Quick-connect 6,35x0,8</td> </tr> <tr> <td>3</td><td>6 terminals with barrier</td> </tr> </table> | Screw | | 0 | 6 terminals with barrier | Solder lug/quick-connect | | 2 | 6 terminals with barrier | 4 | 6 terminals w/o barrier | A | 10 term. with barrier | B | 10 term. w/o barrier | C | 10 terminals for use with connector U2292 | Quick-connect 6,35x0,8 | | 3 | 6 terminals with barrier | <table style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">Quick-connect 6,35x0,8</td> </tr> <tr> <td>5</td><td>6 terminals w/o barrier</td> </tr> <tr> <td>D</td><td>10 term. with barrier</td> </tr> <tr> <td>E</td><td>10 term. w/o barrier</td> </tr> <tr> <td>F</td><td>10 term. for use with connector U2292</td> </tr> <tr> <td colspan="2">Quick-connect 2,8x0,8</td> </tr> <tr> <td>G</td><td>10 term. with barrier</td> </tr> <tr> <td>H</td><td>10 term. w/o barrier</td> </tr> <tr> <td>J</td><td>10 terminals for use with connector U2282</td> </tr> </table> | Quick-connect 6,35x0,8 | | 5 | 6 terminals w/o barrier | D | 10 term. with barrier | E | 10 term. w/o barrier | F | 10 term. for use with connector U2292 | Quick-connect 2,8x0,8 | | G | 10 term. with barrier | H | 10 term. w/o barrier | J | 10 terminals for use with connector U2282 | | | | | | | | | | | | | | | | | | | |
| Screw | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 6 terminals with barrier | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Solder lug/quick-connect | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 6 terminals with barrier | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 6 terminals w/o barrier | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | 10 term. with barrier | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | 10 term. w/o barrier | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | 10 terminals for use with connector U2292 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Quick-connect 6,35x0,8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 6 terminals with barrier | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Quick-connect 6,35x0,8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 6 terminals w/o barrier | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | 10 term. with barrier | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| E | 10 term. w/o barrier | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| F | 10 term. for use with connector U2292 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Quick-connect 2,8x0,8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| G | 10 term. with barrier | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H | 10 term. w/o barrier | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| J | 10 terminals for use with connector U2282 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

ACTUATOR

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---------------------------------|---------------------------------|----------|-----------------------------|--|----------|------|------------|-----------|----------|-------|----------|-------|----------|------|----------|--------|----------|-----|----------|-------|----------|--------|----------|------------------|
| | | | | | | | | | | | | | | | | | | | | | | | | | |
| Type | Colour | | | | | | | | | | | | | | | | | | | | | | | | |
| <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">1</td><td>For non-illuminated application</td> </tr> <tr> <td>2</td><td>For illuminated application</td> </tr> </table> | 1 | For non-illuminated application | 2 | For illuminated application | <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">1</td><td>Blue</td> </tr> <tr> <td>1/4</td><td>Dark blue</td> </tr> <tr> <td>2</td><td>Black</td> </tr> <tr> <td>3</td><td>Green</td> </tr> <tr> <td>4</td><td>Grey</td> </tr> <tr> <td>5</td><td>Yellow</td> </tr> <tr> <td>6</td><td>Red</td> </tr> <tr> <td>7</td><td>Ivory</td> </tr> <tr> <td>9</td><td>Orange</td> </tr> <tr> <td>A</td><td>Aluminium bright</td> </tr> </table> | 1 | Blue | 1/4 | Dark blue | 2 | Black | 3 | Green | 4 | Grey | 5 | Yellow | 6 | Red | 7 | Ivory | 9 | Orange | A | Aluminium bright |
| 1 | For non-illuminated application | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | For illuminated application | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Blue | | | | | | | | | | | | | | | | | | | | | | | | |
| 1/4 | Dark blue | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | Black | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Green | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Grey | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Yellow | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | Red | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | Ivory | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | Orange | | | | | | | | | | | | | | | | | | | | | | | | |
| A | Aluminium bright | | | | | | | | | | | | | | | | | | | | | | | | |

ACTUATOR MARKING

| | | | | | | | | | | | | | | |
|---|----------------|--------|----------|--|----------|--|----------|--|--|--|--|--|--|--|
| | Area A | Area M | Area B | | | | | | | | | | | |
| Orientation | Symbols | | | | | | | | | | | | | |
| <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">N</td> <td></td> </tr> <tr> <td>O</td> <td></td> </tr> <tr> <td>S</td> <td></td> </tr> <tr> <td>E</td> <td></td> </tr> </table> | N | | O | | S | | E | | <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width: 33%; text-align: center;"></td> <td style="width: 33%; text-align: center;"></td> <td style="width: 33%; text-align: center;"></td> </tr> </table> | | | | | |
| N | | | | | | | | | | | | | | |
| O | | | | | | | | | | | | | | |
| S | | | | | | | | | | | | | | |
| E | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |

Symbols & Accessories : see end of section D.



NOTICE : please note that not all combinations of above numbers are available. Refer to the following pages for further information.


KR series

New!

Power rocker switches

Case

- To order case only (without rocker), finish your order number with the LED wiring code.

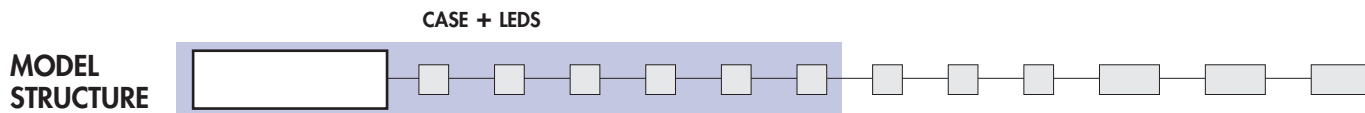

| | 2-3 | 1-2 | |
|----------------------------|-----|-----|-------------|
| | 5-6 | 4-5 | |
| Single pole KR31 | | | ON - OFF |
| | | | ON ON ON |
| | | | ON ON MOM |
| KR35 | | | MOM - ON |
| KR36 | | | ON - ON |
| KR37 | | | MOM OFF MOM |
| KR38 | | | ON OFF MOM |
| KR39 | | | ON OFF ON |
| Double pole KR41 | | | |
| KR44* | | | |
| KR44-1R* | | | |
| KR45 | | | |
| KR46 | | | |
| KR47 | | | |
| KR48 | | | |
| KR49 | | | |

Bottom view

* Function 4 : single pole in double pole case

ELECTRICAL FUNCTIONS AND CONNECTIONS

In the tables below, terminal connections as viewed from bottom of switch. Only the contact area is represented.

For single pole models, only terminals 1, 2 and 3 are to be considered (not terminals 6, 5, 4).

x = w/o terminal
o = with terminal
▲ = momentary

| | Positions | | | | Positions | | |
|---------------------------|-----------|--|--|--------------------------|-----------|--|--|
| | | | | | | | |
| Function 1 * KR31-KR41 | | | | Function 8 KR38-KR48 | | | |
| Function 5 KR35-KR45 | | | | Function 9 KR39-KR49 | | | |
| Function 6 KR36-KR46 | | | | Function 4 KR44 | | | |
| Function 7 KR37-KR47 | | | | Function 4-1R KR44-1R | | | |

* Function 1 only available for 6 terminal versions.

KR series


Power rocker switches

New!

Case

TERMINALS

CASE + LEDS



Screw

Solder lug / quick-connect

Normalized quick-connect 6,35x0,8

Normalized quick-connect 2,8x0,8

0 6 term. with barrier

2 6 terminals with barrier
4 6 terminals w/o barrier
A 10 terminals with barrier
B 10 terminals w/o barrier
C 10 terminals for use with connector U2292

3 6 terminals with barrier
5 6 terminals w/o barrier
D 10 terminals with barrier
E 10 terminals w/o barrier
F 10 terminals for use with connector U2292

G 10 terminals with barrier
H 10 terminals w/o barrier
J 10 terminals for use with connector U2282


6 terminal version 10 terminal version

Terminals are marked on the case.

The drawings show the maximum possible number of terminals.

CONTACT MATERIALS

CASE + LEDS




- A** Silver
- D** Silver, gold plated

New!

SEALING

CASE + LEADS




X No sealing

K IP68 (switch assembled on panel)

Ultrasonic welding of frame to case is standard on all versions.


The ultrasonic welding and the optional panel seal prevent water and dust from introducing into the switch housing.

*The product shall be installed professionally.
Test conditions available on request.*

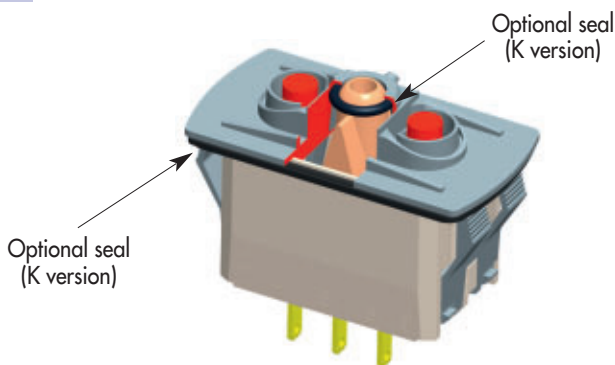

LEDS

CASE + LEADS

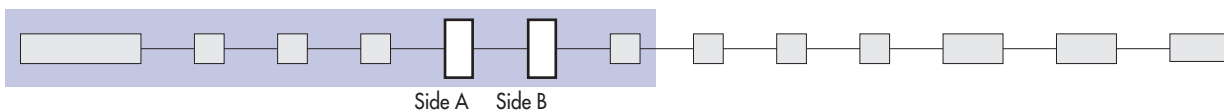


Complete each enlarged box with one of the codes listed below.

X Without LED

| | Red | Green | Yellow | Blue | White |
|-------|----------|----------|----------|----------|----------|
| 6VDC | A | B | C | M | R |
| 12VDC | D | E | F | N | S |
| 24VDC | J | K | L | P | T |

LED consumption : 20mA @ nominal voltage (25°C)

Other illumination solutions : on request.

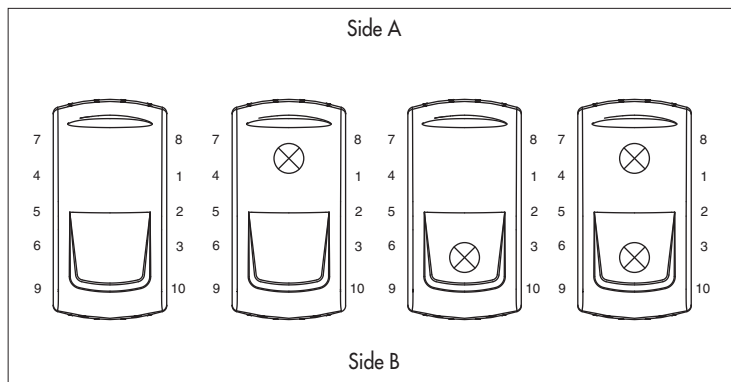

KR series

Power rocker switches


New!

Case - LEDs

WIRING




The LED wiring diagram is shown on the case.

CASE + LEDs






• For 6 terminal versions

LED connected to the load

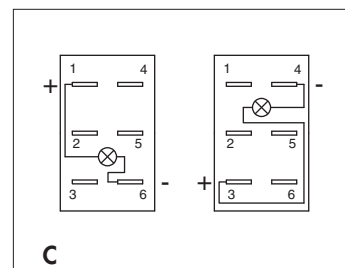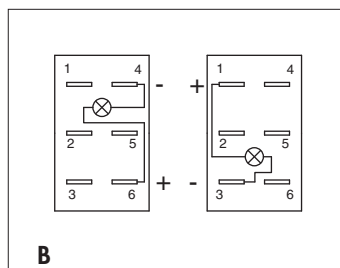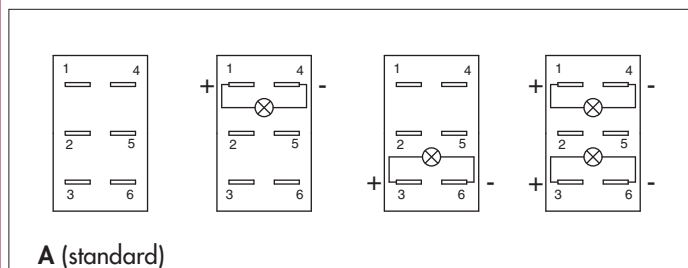


Note : If not available, terminals are added to connect the LED.

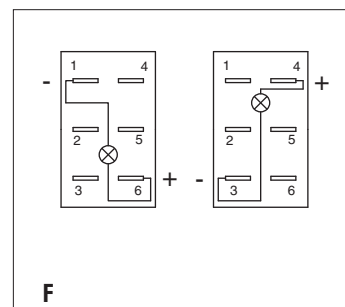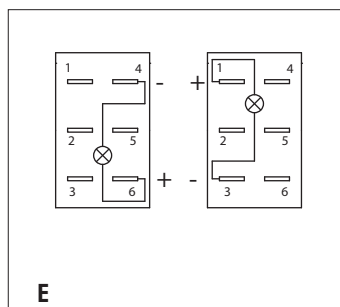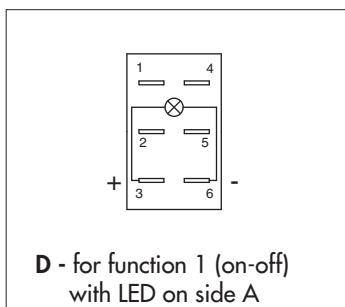


• For 10 terminal versions

Independent LED or integrated functions

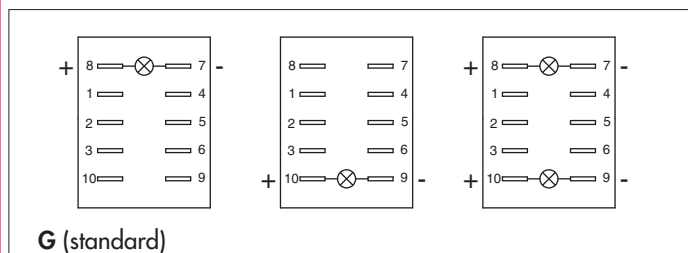

To have independent LEDs.

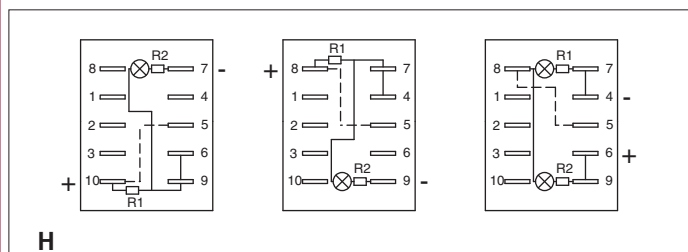

To obtain 2 symbol illumination levels (night illumination when OFF and higher illumination when ON).

H wiring with LED on side A available with functions 6, 8, 9 and 44.


H wiring with LED on side B available with functions 5, 6 and 9.

H wiring with 2 LEDs available with functions 8 and 9.

More information (H wiring schematics) : on request.

Dotted line = external wiring, continuous line = internal wiring

Available in Single Pole only, with H and J quick-connect terminals.

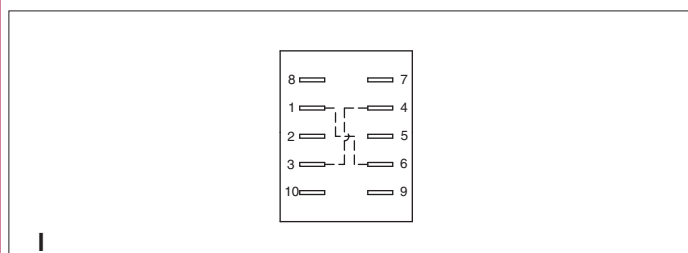

To have a polarity inversion (typical application : fan motor).

Dotted line = external wiring

Power supply between 2 and 5 - Load between 1 and 4 or 3 and 6. Available with H and J quick-connect terminals.

Please contact us for other wiring solutions.

KR series


New!

Power rocker switches

Actuator - Marking


To order actuator only (without case), begin the order number with code KRR, then follow the order format from "actuator type" until the end of the options.

ACTUATOR TYPE

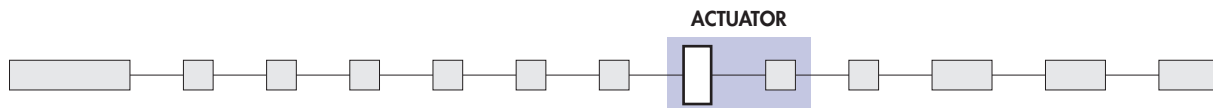

- 1 For non-illuminated application
 - 2 For illuminated application
- Other rocker design : on request.

ACTUATOR COLOUR

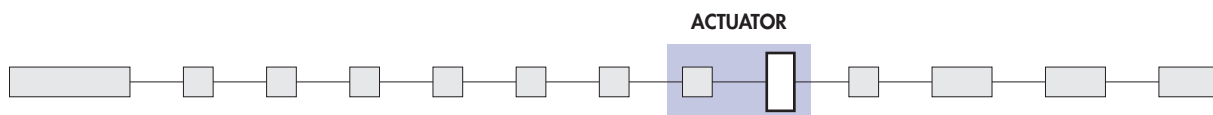

| Code | Colour |
|------|-----------|
| 1 | Blue |
| 1/4 | Dark blue |
| 2 | Black |
| 3 | Green |

| Code | Colour |
|------|--------|
| 4 | Grey |
| 5 | Yellow |
| 6 | Red |
| 7 | Ivory |



| Code | Colour |
|------|------------------|
| 7/1 | White |
| 9 | Orange |
| A | Aluminium bright |

Note : colours 7 and 7/1 not available on illuminated versions.
A **soft-touch varnish** can be added. Consult us.



MARKING ORIENTATION

If no marking required, leave box blank.

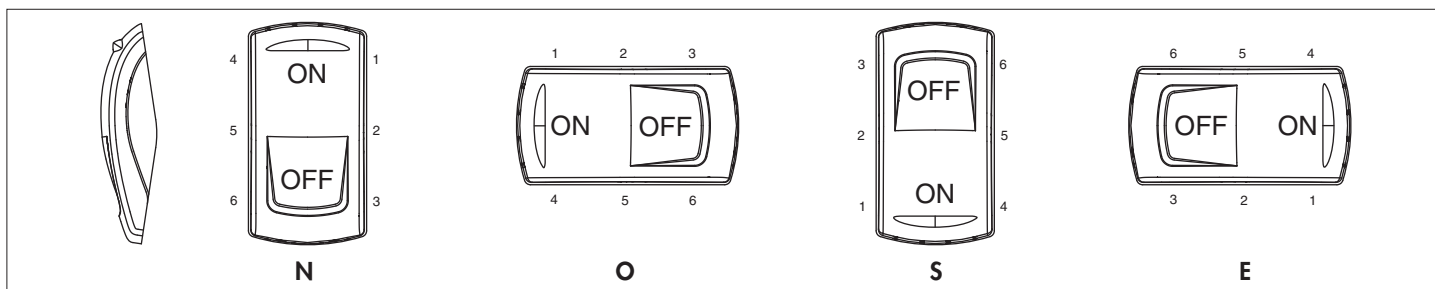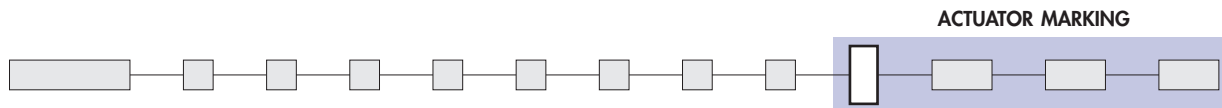

Other orientations : on request


KR series

Power rocker switches

New!

Marking - Mounting

SYMBOLS

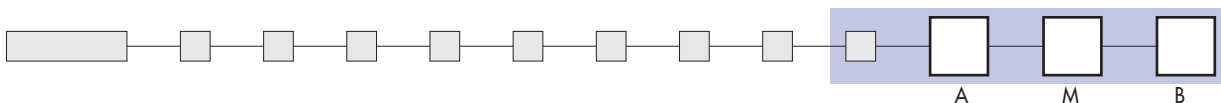

XX No symbol


Available symbols : see end of section D.

Marking colour

White marking for illuminated rockers (laser etching) and non-illuminated black rockers (pad printing). Black marking for non-illuminated colour rockers (pad printing). Other : on request.

Laser etching resistance


- Water and petrol resistant according to EN61058-1
- Tear resistant (cross-cut test) according to NF ISO 2409 : class 0
- UV resistant according to ISO 4892-2



Marking area

For illuminated versions. The symbol will be included in the hatched area.


Marking in M are : on request.

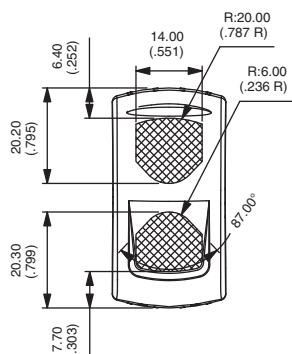




SWITCH PANEL CUT-OUT

Panel thickness : 0,8 mm to 4,6 mm

Recommended panel thickness :
between 2 mm and 3,5 mm

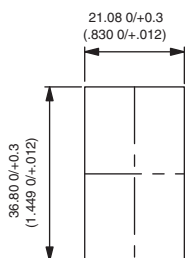

MATRIX MOUNTING

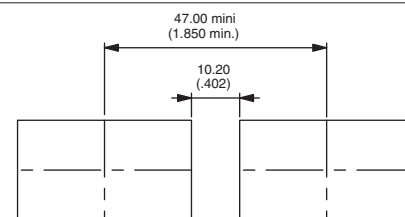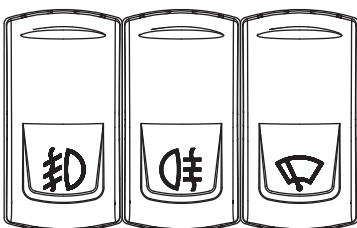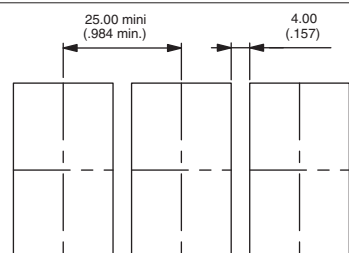

K range

Power rocker switches and indicators

Symbols

Most symbols meet the ISO 7000 standard "graphical symbols for use on equipments" (code given in bracket in the description). Contact us for symbols not featured in the following tables.

UG1006-A

Legend scale :

KR series : 1:1

KL, KG and KI series : depending on space available on the product (see "Symbols" section at the end of each series).

| CODE | SYMBOL | DESCRIPTION |
|------|--------|------------------------|
| XX | None | - |
| 01 | ON | - |
| 02 | OFF | - |
| 03 | ○ | - |
| 04 | I | - |
| 05 | II | - |
| 06 | STOP | - |
| 07 | A | Stop |
| 08 | M | Motion |
| 09 | ▲ | Up motion |
| 10 | ▼ | Down motion |
| 11 | ☀ | Hot |
| 12 | ✱ | Cold |
| 13 | ⚠ | Hazard warning (0085) |
| 14 | ☀ | Traveller lighting |
| 15 | ☀ | Driver lighting (1421) |

| CODE | SYMBOL | DESCRIPTION |
|------|--------|--------------------------------------|
| 16 | ☀ | Revolving light |
| 17 | ☐ | Rear ventilator |
| 18 | ☀ | Heating (0637) |
| 19 | ☐ | Door opening |
| 20 | ☀ | Windshield demister/defroster (0635) |
| 21 | ☀ | Windshield wiper (0086) |
| 22 | ☀ | Windshield washer (0088) |
| 23 | ☀ | Ventilator fan (0089) |
| 24 | ☀ | Side mirror defroster |
| 25 | ☀ | Restarting pump |
| 26 | ☀ | Front fog lights (0633) |
| 27 | ☀ | Rear fog lights (0634) |
| 28 | ☀ | Propulsion system trim |
| 29 | ☀ | Beacon (1141) |
| 30 | ☀ | Anchor |
| 31 | ☀ | Electric motor (0011) |

| CODE | SYMBOL | DESCRIPTION |
|------|--------|---------------------------------------|
| 32 | ☀ | Emergency first aid vehicle (2565) |
| 33 | ☀ | Load tipping (1557) |
| 34 | ☀ | Loading light (2457) |
| 35 | ☀ | Tractor, rear-ward (1667) |
| 36 | ☀ | Combine, direction of movement (1678) |
| 37 | ☀ | Use no forks (2406) |
| 38 | ☀ | Transmission (1166) |
| 39 | ☀ | Working spot light (1145) |
| 40 | ☀ | Engine (0640) |
| 41 | ☀ | Horn (0244) |
| 42 | ☀ | Lock (1656) |
| 43 | ☀ | Taxi sign light (2551) |
| 44 | ☀ | Working light (1204) |
| 45 | ☀ | Working light symmetric (1204) |
| 46 | ☀ | - |
| 47 | ASM | - |

K range

Power rocker switches and indicators









































Symbols

Most symbols meet the ISO 7000 standard "graphical symbols for use on equipments" (code given in bracket in the description). Contact us for symbols not featured in the following tables.

Legend scale :

KR series : 1:1

KL, KG and KI series : depending on space available on the product (see "Symbols" section at the end of each series).

| CODE | SYMBOL | DESCRIPTION | CODE | SYMBOL | DESCRIPTION | CODE | SYMBOL | DESCRIPTION |
|------|---|---------------------------|------|---|--------------------------|------|---|--------------------------|
| 48 |  | All wheel drive | 64 |  | Indicator | 80 |  | Front windshield heating |
| 49 |  | Differential lock (1662) | 65 |  | Brake release | 81 | AUS | Aus |
| 50 |  | - | 66 |  | Baggage room left door | 82 |  | Radiator fan |
| 51 |  | - | 67 |  | Baggage room right door | 83 |  | Remove retarder |
| 52 |  | - | 68 |  | Power blinds | 84 |  | Restricted speed |
| 53 | N | - | 69 |  | Engine idle control | 85 |  | Preheater |
| 54 |  | Rear window wiper (0097) | 70 | CRUISE RES/SET | Cruise res/set | 86 |  | ABS detection |
| 55 |  | Rear window washer (0099) | 71 |  | Driver windows up/down | 87 |  | ECAS detection |
| 56 |  | Lower load (2223) | 72 |  | Middle door opening | 88 |  | Engine stop |
| 57 |  | Cab lock (1560) | 73 |  | Front door opening | 89 | CRUISE RES/CAN | Cruise res/cancel |
| 58 |  | Extraction | 74 |  | Lighting in baggage room | 90 |  | ECAS reset |
| 59 |  | Pumping in | 75 | CRUISE ON/OFF | Cruise on/off | 91 |  | Driver windows heating |
| 60 |  | Rear PTO (1572) | 76 | TV | TV | 92 | CRUISE SET+/-SET- | Cruise set |
| 61 |  | Front PTO | 77 |  | Pump | 93 |  | Air bag up/down |
| 62 |  | Rockshaft down | 78 | WC | Toilet | 94 |  | Read lighting |
| 63 |  | Rockshaft up | 79 |  | Toilet decontamination | 95 |  | Lighting main switch |

K range

Power rocker switches and indicators

Symbols

Most symbols meet the ISO 7000 standard "graphical symbols for use on equipments" (code given in bracket in the description). Contact us for symbols not featured in the following tables.

Legend scale :

KR series : 1:1

KL, KG and KI series : depending on space available on the product (see "Symbols" section at the end of each series).

| CODE | SYMBOL | DESCRIPTION |
|------|--------|------------------------------|
| 96 | | Heating using water |
| 97 | | Low beam |
| 98 | | Position lights |
| 99 | | Diesel acceleration |
| A1 | | Manual mode |
| A2 | | Clockwise cabin rotation |
| A3 | | Anticlockwise cabin rotation |
| A4 | | - |
| A5 | | - |
| A6 | | Parking brake |
| A7 | | - |
| A8 | | - |
| A9 | | - |
| AA | | - |
| AB | | - |
| AC | | - |




| CODE | SYMBOL | DESCRIPTION |
|------|--------|---|
| AD | | - |
| AE | | - |
| AF | | - |
| AG | | Battery charging condition (0247) |
| AH | | Turn signals (0084) |
| AJ | | High beam (0082) |
| AK | | Differential lock, bogie (2600) |
| AL | | Brushing with a rotating brush (0070) |
| AM | | Differential lock, transfer case 4x4 (2475) |
| AN | | Loader bucket, float (1441) |
| AP | | Loader bucket (1437) |
| AQ | | Rear window washer & wiper (0098) |
| AR | | Header Header drive (1579) |
| AS | | Excavator/backhoe boom side shift (2091) |
| AT | | Chemical water treatment (1851) |
| AU | | Grapple skidder, single funct° boom (1762) |

| CODE | SYMBOL | DESCRIPTION |
|------|--------|-------------|
| AV | | - |
| AW | | - |
| AY | | - |
| AZ | | - |
| B1 | HIGH | - |
| B2 | LOW | - |
| B3 | | - |





K range

Power rocker switches and indicators

Accessories for KR, KL and KI series

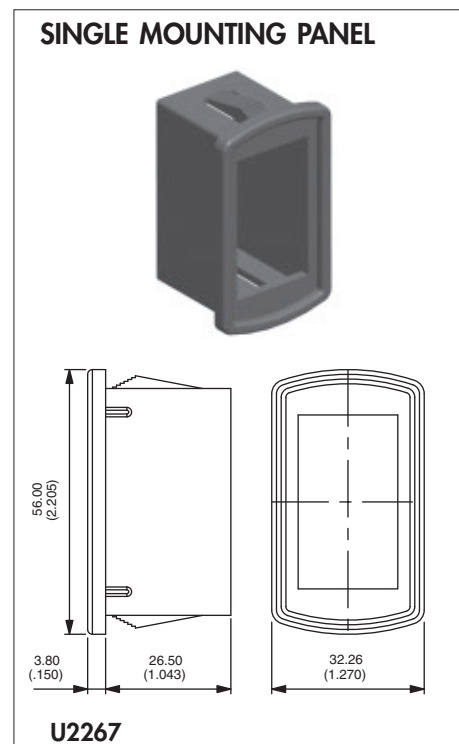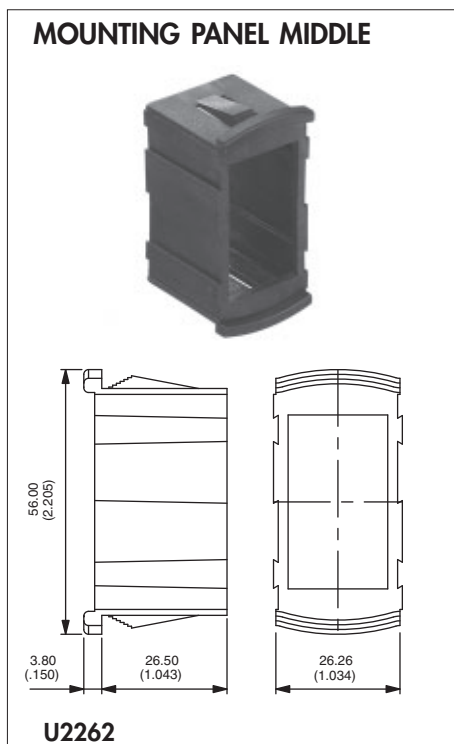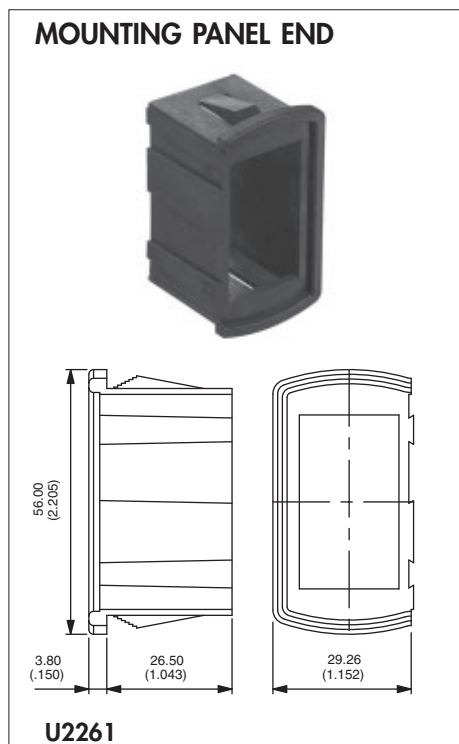

Recommended panel thickness : 1,10 mm - 1,80 mm - 2,60 mm - 3,40 mm - 4,20 mm - 5 mm - 5,80 mm

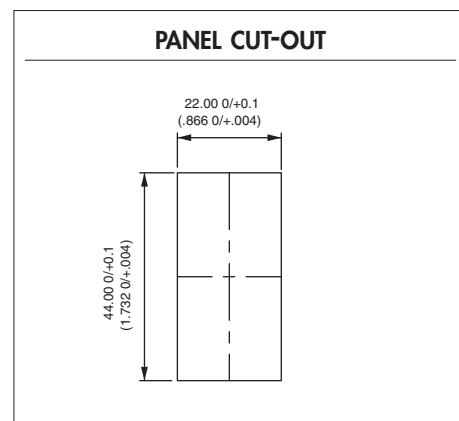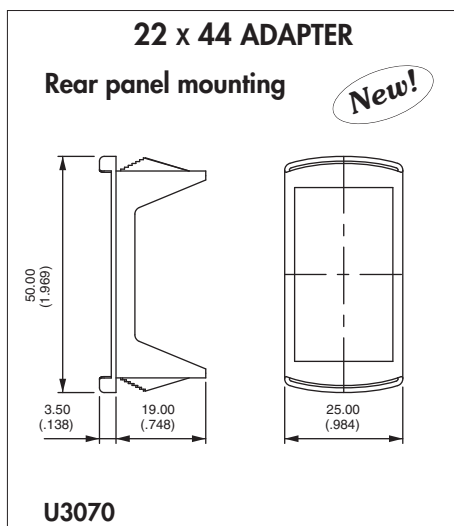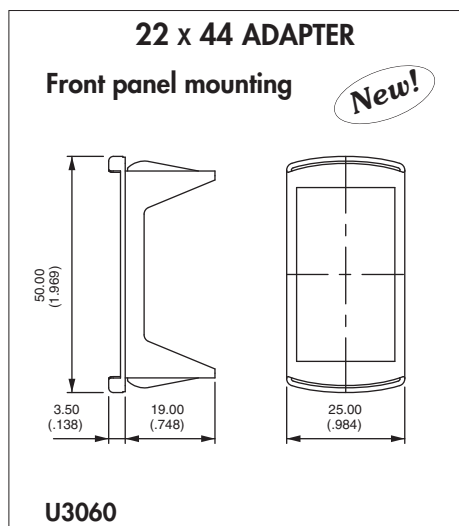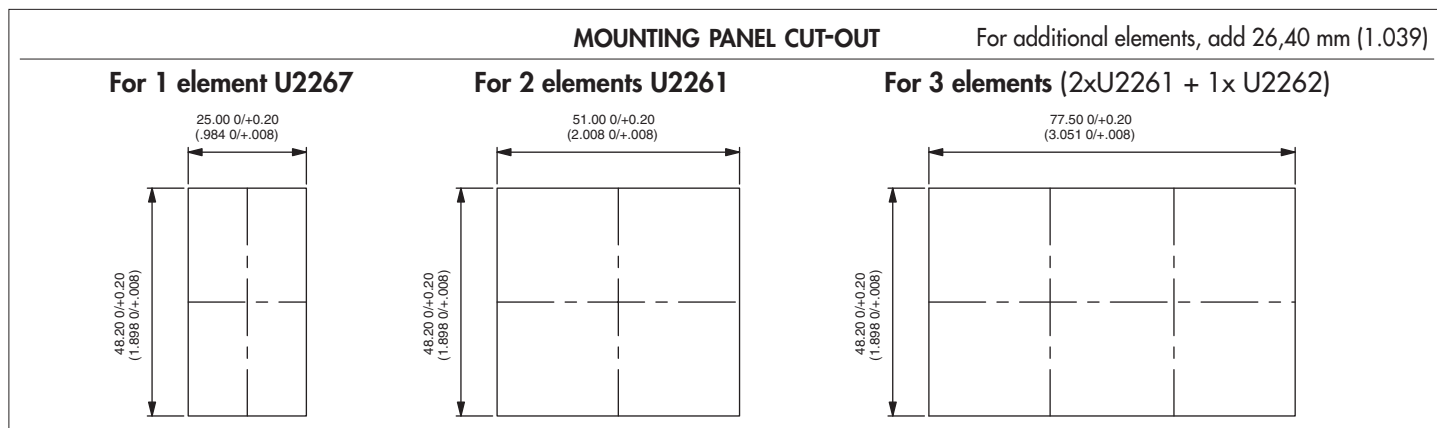

Adapter colours (replace 0 with code)
 1/4 : dark blue - 2 : black - 4 : grey
 5 : yellow - 6 : red - 7/1 : white

Recommended panel thickness : 0,60 mm to 1,50 mm

Recommended panel thickness : 1,60 mm -0,1/0 to 5,60 mm -0,1/0 in stages of 0,40 mm

K range

Power rocker switches and indicators

Accessories for KR, KL and KI series

ACTUATOR REMOVING TOOL



U3052

2 tools are supplied

EXTRACT ACTUATOR (KR ONLY)

Allows the extraction of the rocker / rocker support assembly.
Place the 2 claws under the support and push as indicated by the arrow.

EXTRACT ROCKER (KR ONLY)

Allows to separate the rocker from its support.
Insert the tool between rocker and support as indicated by the arrow. Pull out the tool in the opposite direction.

EXTRACT SWITCH (KR, KL AND KI)

Allows to extract switch from panel mounting units. 2 tools are necessary.
Insert the tools between switch and panel mounting units from the rear to compress the snap-in device. Pull off switch manually.

CONNECTORS


Standard colour : black. Other colours : on request.
Connectors cannot be combined with wiring types H and I.



U2260

6 terminal version

For use with terminals type 2, 3, 4 or 5.
6,35 (1/4) tabs to be fitted by the user
(example : AMP/Tyco 0-0141013-2).
Can be used for the KG series.

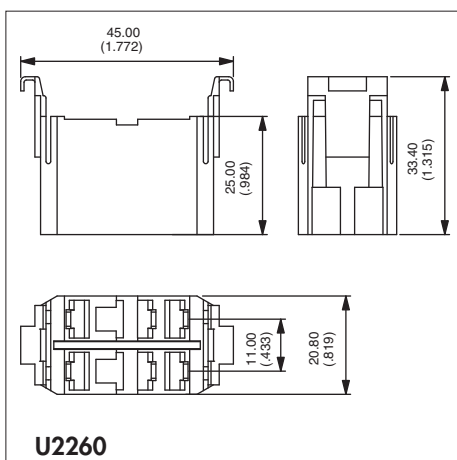


U2260




U2282

10 terminal version

For use with terminals type H or J.
2,8 (.110) tabs to be fitted by the user
(example : AMP/Tyco 0-927779-3).

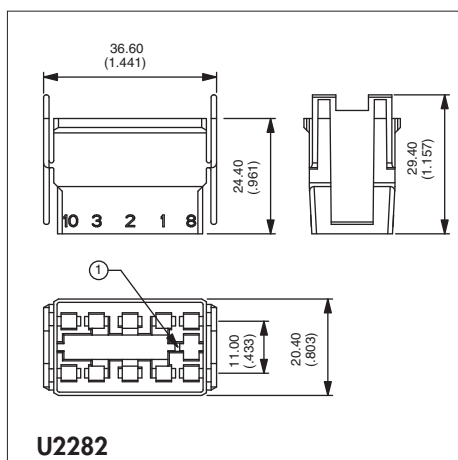


U2282

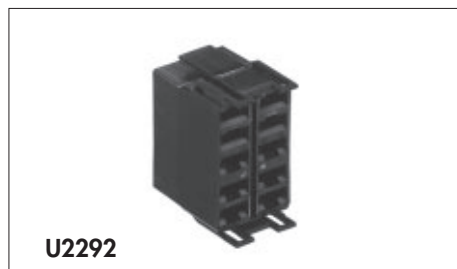

U2292

10 terminal version

For use with terminals type B, C, E or F.
6,35 (1/4) tabs to be fitted by the user
(example : AMP/Tyco 0-0141013-2).

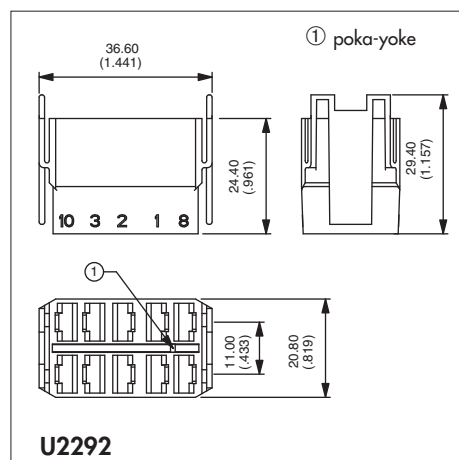

U2292

K range

Power rocker switches and indicators


Accessories for KR, KL and KI series

HOLE PLUGS

Usefull for future extensions.

| Code | Colour | Code | Colour |
|---------|-----------|-------|--------|
| U2271 | Blue | U2274 | Grey |
| U2271/4 | Dark blue | U2275 | Yellow |
| U2272 | Black | U2276 | Red |
| U2273 | Green | U2277 | Ivory |
| | | U2279 | Orange |

Recommended panel thickness :
1,50 mm to 6 mm

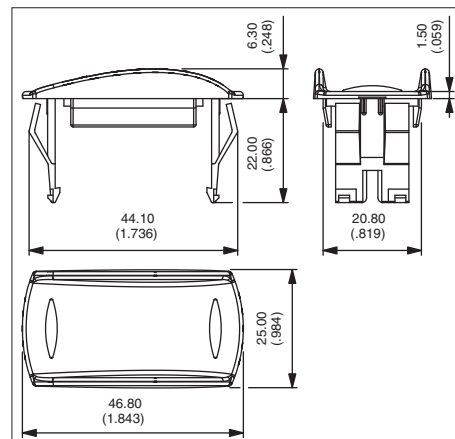

Connectors can be hanged on specific hole plugs. Contact APEM.