
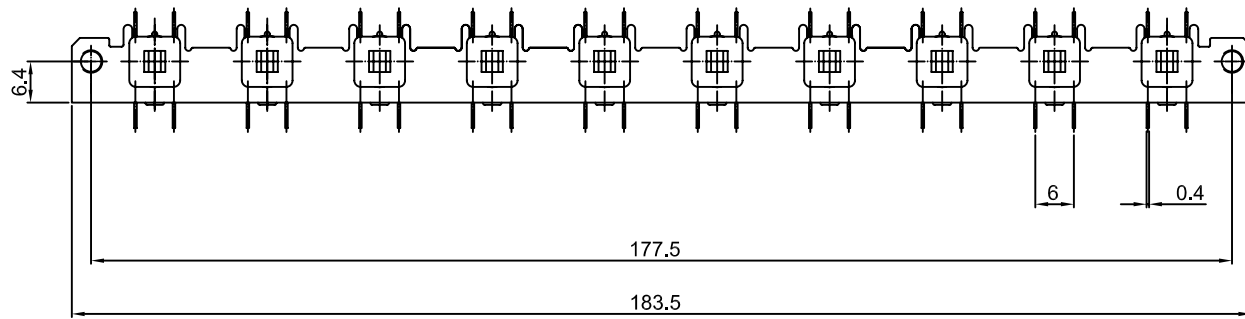


DIMENSION	TOLERANCE
BELOW 10 mm	± 0.3
10~100 mm	± 0.5
ABOVE 100 mm	± 0.8
ANGLE	± 3°

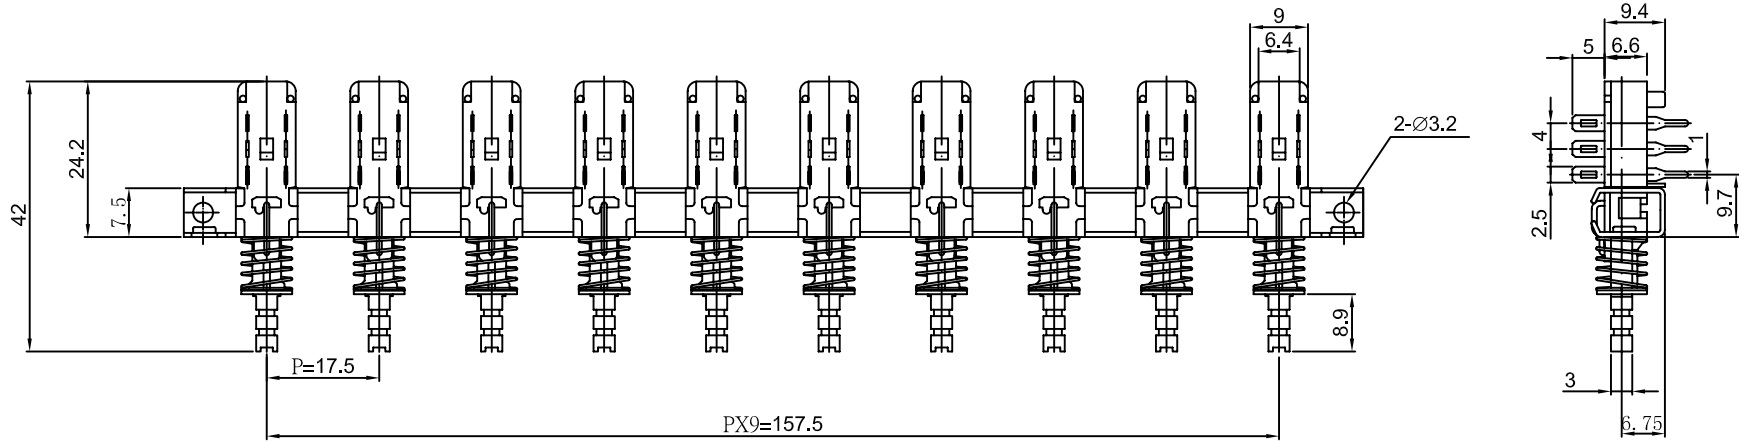

1. RATING : 125 V AC , 0.2 A ; 25 V DC , 1 A .
2. CONTACT RESISTANCE : 40 mΩ MAX .
3. INSULATION RESISTANCE : 500 V DC , 100 MΩ MIN .
4. OPERATING TEMPERATURE : -10°C ~ 60°C .
5. OPERATING LIFE : 10,000 CYCLES .
6. OPERATING FORCE : 350±150 gf (2P2T~6P2T) , 600±150 gf (8P2T~16P2T) .

KEY	1	2	3	4	5	6	7	8	9	10
選項 OPTION										
POLE / 回路	2	2	2	2	2	2	2	2	2	2
TERMINAL TYPE / 端子	A	A	A	A	A	A	A	A	A	A
OPERATING / 動作	L	L	L	L	L	L	L	L	L	L
TIMING N / S	N	N	N	N	N	N	N	N	N	N
TRAVEL / 行程	4	4	4	4	4	4	4	4	4	4
KNOB	X	X	X	X	X	X	X	X	X	X
PITCH / 間距	17.5 mm									
FRAME TYPE	M3x0.5									

△					DATE	2011/05/03	UNIT	mm	MODE	PUSH BUTTON SWITCH
△					APPROVAL	KAVEN	SCALE	1 : 1	PART	T-1017M-01
△					CONFIRM	ALAN	VIEW		2D FILE NAME	T-1017M-01
	DATE	APPROVAL	DESIGN	ENGINEERING CHANGE DESCRIPTION	DESIGN	Elahe	VER.	01	3D FILE NAME	

WB Well Buying
Industrial Co.,Ltd.