

FKN 型熔断电阻器

RF TYPE FUSIBLE RESISTORS

使用环境温度：-55 ~ +125

Operating ambient temperature -55 ~ +125

FEATURES


Super heat dissipation, small linear temperature coefficient.
 Instant overload capability, low noise without annual shift on resistance value.
 Flameproof, light weight paint Color Of White Noncombustible

特性


耐热性优，电阻温度系数 TCR 小，呈直线变化
 短时间超负载，低噪音，阻值精度无变化
 不燃性，重量轻，涂漆颜色为灰白色，不燃性面漆

FKNP/RXF 线绕阻燃涂漆电阻器结构图

FKNP/RXF WIREWOUND NONFLAME RESISTORS CONSTRUCTION

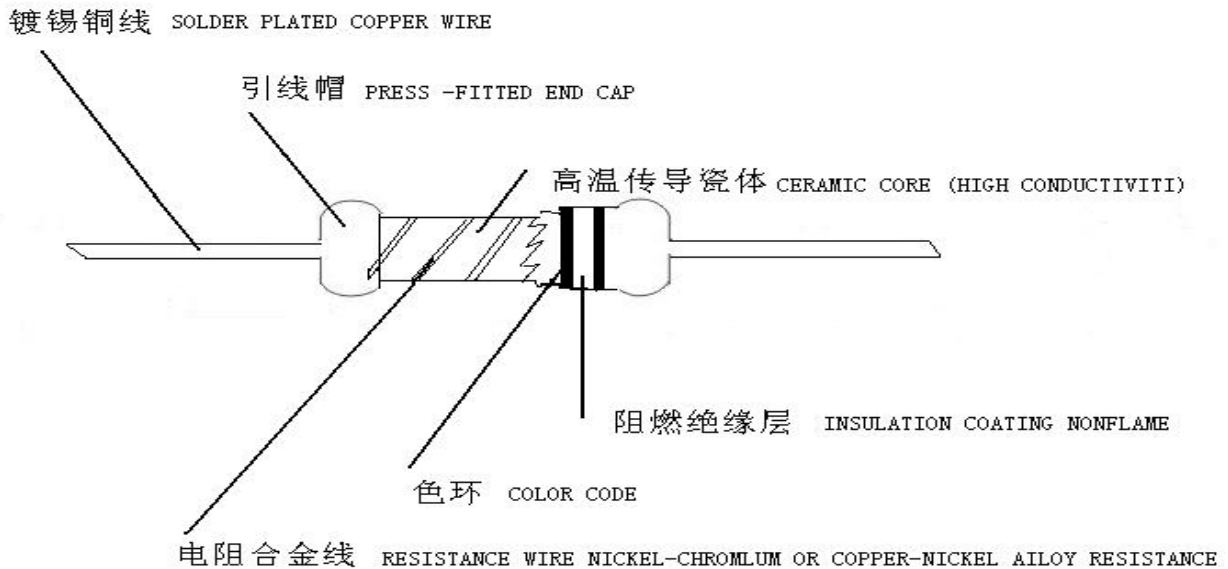

外形尺寸 DIMENSIONS

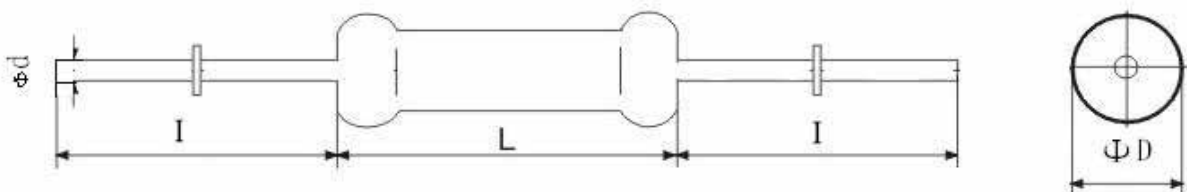

型号 Type	电阻尺寸 mm (Resistor dimension Max)				阻值范围 Resistance Range	绝缘电压 (直流或交流峰值) Insulation Voltage (DcorAC peakvalue)
	D±0.5	L±1.5	l±2	d±0.05	KNP / RX21	
FKN-1/4W (FKN -1/2WS)	2.3	6.3	25	0.45	0.1 ~ 100	350V
FKN-1/2W (FKN -1WS)	3.5	9.5	25	0.55	0.1 ~ 100	350V
FKN -1W (FKN -2WS)	4.5	11.5	25	0.55	0.1 ~ 100	350V
FKN -2W (FKN -3WS)	5.0	16	22	0.65	0.15 ~ 100	350V
FKN -3W (FKN -5WS)	6.5	18.5	35.5	0.75	0.1 ~ 1K	350V

熔断性能 FUSING CHARACTERISTICS :

额定功耗	标称阻值范围		
	< 2	2 ~10	> 10
	熔断时间 (S)		
12 倍	-	< 60	< 30
16 倍	< 60	< 30	< 15
25 倍	< 30	< 15	< 7.5

说明：熔断参数可协议生产