

KNP/RX21 线绕阻燃涂漆电阻器

KNP/RX21 WIREWOUND NONFLAME RESISTORS

使用环境温度：-55 ~ +125

Operating ambient temperature -55 ~ +125

FEATURES


Super heat dissipation, small linear temperature coefficient.
Instant overload capability, low noise without annual shift on resistance value.
Flameproof, light weight paint Color Of Fwhite Noncombustible

特性


耐热性优，电阻温度系数 TCR 小，呈直线变化
短时间超负载，低噪音，阻值精度无变化
不燃性，重量轻，涂漆颜色为灰白色，不燃性面漆

KNP/RX21 线绕阻燃涂漆电阻器结构图

KNP/RX21 WIREWOUND NONFLAME RESISTORS CONSTRUCTION

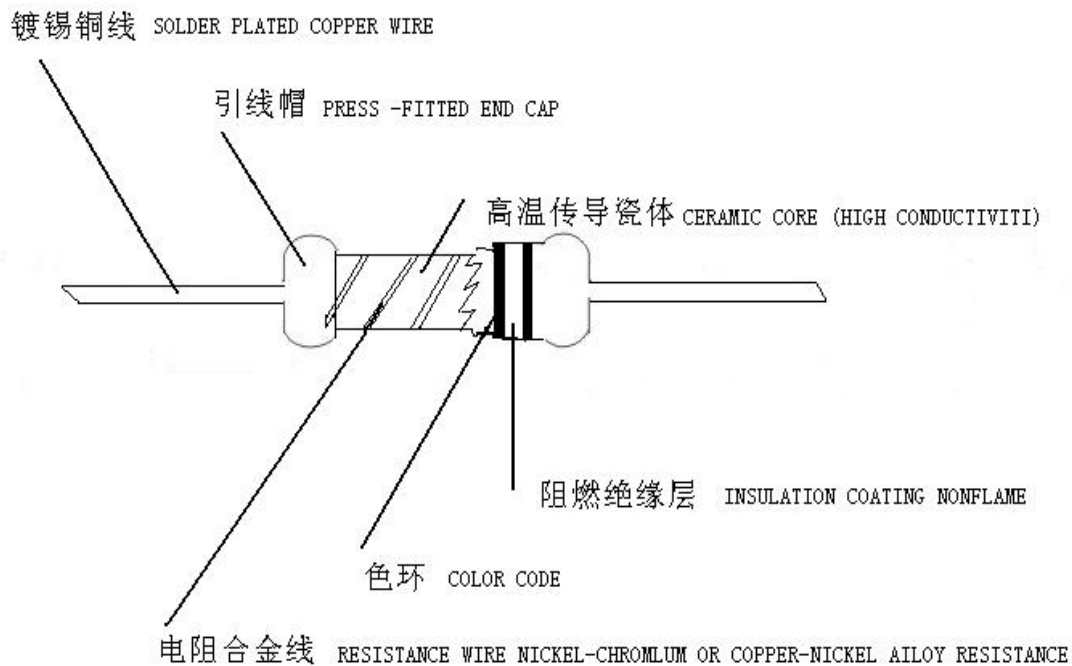

外形尺寸 DIMENSIONS

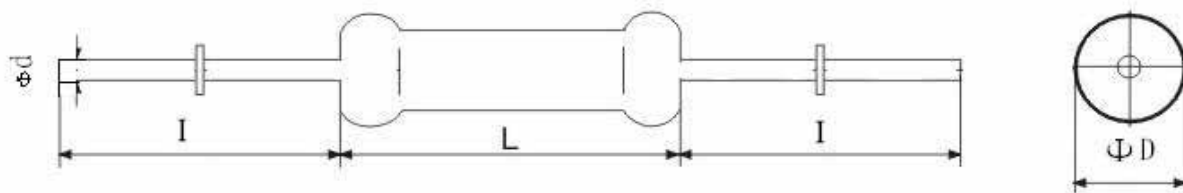

型号 Type	电阻尺寸 mm (Resistor dimension Max)				阻值范围 Resistance Range	绝缘电压 (直流或交流峰值) Insulation Voltage (Dc or AC peakvalue)
	$D \pm 0.5$	$L \pm 1.5$	$I \pm 1.5$	$d \pm 0.05$	KNP / RX21	
KNP-1/4W	2.5	6.5	27	0.45	0.1 ~ 300	350V
KNP-1/2W	3.5	9.5	25	0.55	0.1 ~ 300	
KNP-1/2WS	2.5	6.5	27	0.45	0.1 ~ 300	
KNP-1W	4.5	11.5	24	0.65	0.1 ~ 470	
KNP-1WS	3.5	9.5	25	0.55	0.1 ~ 300	
KNP-2W	5.0	16	27	0.75	0.1 ~ 820	
KNP-2WS	4.5	11.5	24	0.65	0.1 ~ 470	
KNP-3W	6.5	18.5	35	0.75	0.1 ~ 1.2K	500V
KNP-3WS	5.0	16	27	0.75	0.1 ~ 820	
KNP-5W	8.5	25	34	0.75	0.1 ~ 2.2K	
KNP-5WS	6.5	18.5	35	0.75	0.1 ~ 1.2K	

降功耗曲线 WIREWOUND RESISTORS POWER DERATING CURVE

