

**ADJUSTABLE PRECISION SHUNT REGULATORS****AZ431****General Description**

The AZ431 series ICs are three-terminal adjustable shunt regulators with guaranteed thermal stability over a full operation range. These ICs feature sharp turn-on characteristics, low temperature coefficient and low output impedance, which make them ideal substitutes for Zener diodes in applications such as switching power supply, charger and other adjustable regulators.

The AZ431 series ICs contain two voltage types, AZ431-A for 40V and AZ431-B for 20V. The output voltage of both types can be set to any value between $V_{REF}(2.5V)$ and the corresponding maximum cathode voltage.

The AZ431 precision reference is offered in two band-gap tolerance: 0.4% and 0.8%.

These ICs are available in 5 Packages: TO-92, SOT-23-3, SOT-23-5, SOT-89 and SOIC-8.

Features

- Programmable Precise Output Voltage from 2.5V to 36V or 18V
- Very Accurate Reference Voltage: 0.15% Typical
- High Stability under Capacitive Load
- Low Temperature Deviation: 4.5mV Typical
- Low Equivalent Full-range Temperature Coefficient with 20PPM/°C Typical
- Low Dynamic Output Resistance: 0.2Ω Typical
- Sink Current Capacity from 1mA to 100 mA
- Low Output Noise
- Wide Operating Range of -40 to 125°C

Applications

- Charger
- Voltage Adapter
- Switching Power Supply
- Graphic Card
- Precision Voltage Reference

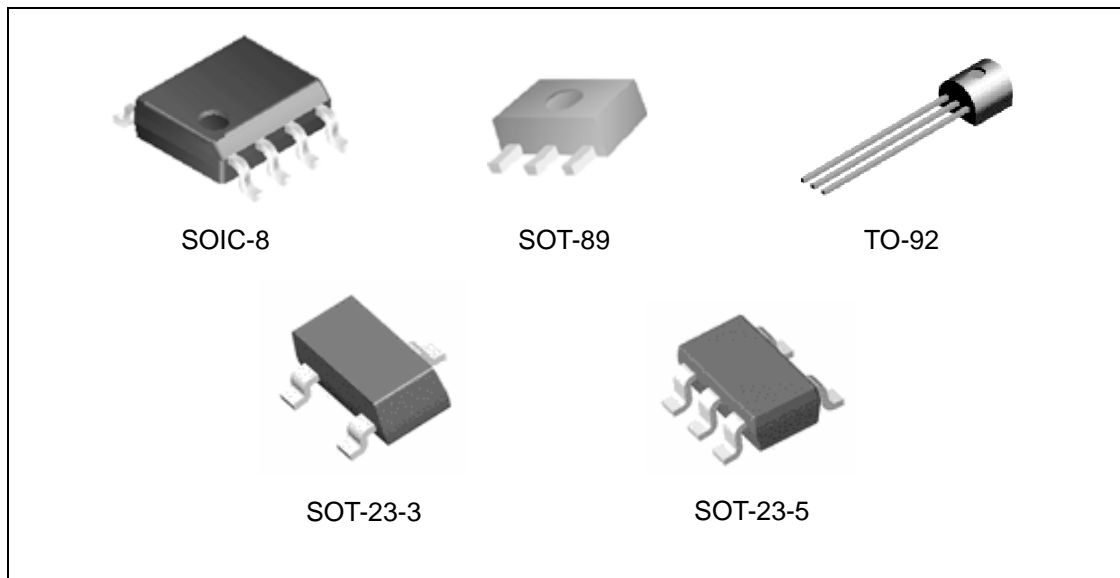


Figure 1. Package Types of AZ431



ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Pin Configuration

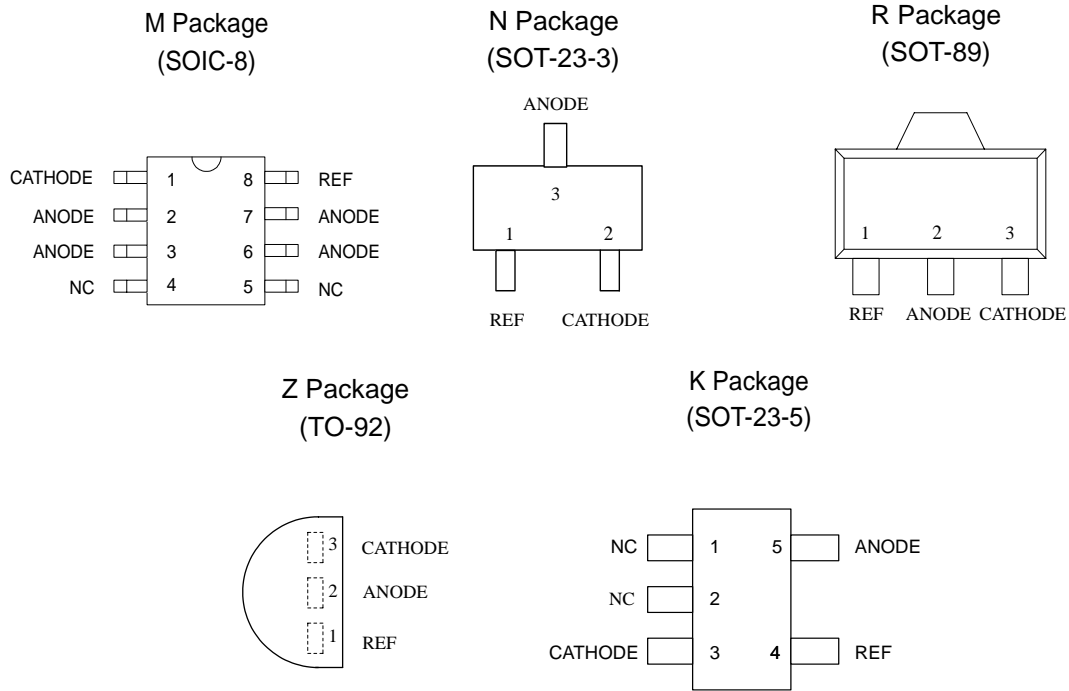


Figure 2. Pin Configuration of AZ431 (Top View)

Functional Block Diagram

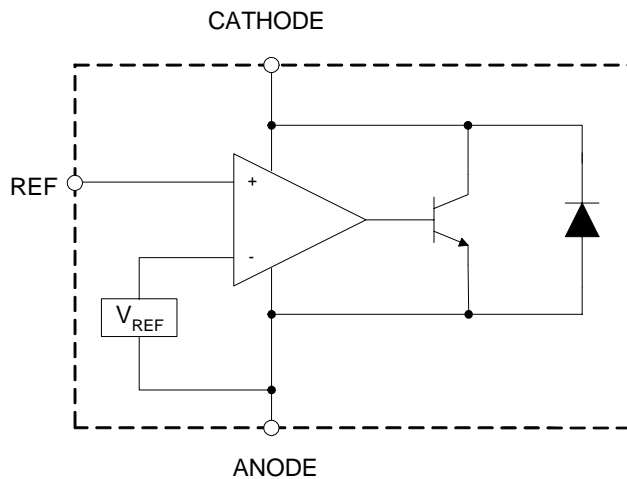



Figure 3. Functional Block Diagram of AZ431



ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Ordering Information

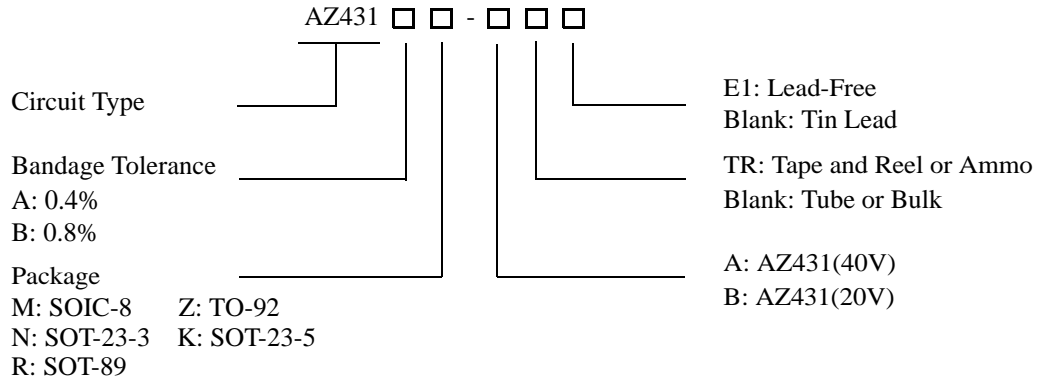

40V Products

| Package | Temperature Range | Voltage Tolerance | Part Number | | Marking ID | | Packing Type |
|----------|-------------------|-------------------|-------------|---------------|------------|-------------|--------------|
| | | | Tin Lead | Lead Free | Tin Lead | Lead Free | |
| SOT-23-3 | -40 to 125°C | 0.4% | AZ431AN-ATR | AZ431AN-ATRE1 | N41 | EA1 | Tape & Reel |
| | | 0.8% | AZ431BN-ATR | AZ431BN-ATRE1 | N42 | EA2 | Tape & Reel |
| SOT-23-5 | -40 to 125°C | 0.4% | AZ431AK-ATR | AZ431AK-ATRE1 | K3A | E3A | Tape & Reel |
| | | 0.8% | AZ431BK-ATR | AZ431BK-ATRE1 | K3B | E3B | Tape & Reel |
| TO-92 | -40 to 125°C | 0.4% | AZ431AZ-A | AZ431AZ-AE1 | AZ431AZ-A | AZ431AZ-AE1 | Bulk |
| | | 0.4% | AZ431AZ-ATR | AZ431AZ-ATRE1 | AZ431AZ-A | AZ431AZ-AE1 | Ammo |
| | | 0.8% | AZ431BZ-A | AZ431BZ-AE1 | AZ431BZ-A | AZ431BZ-AE1 | Bulk |
| | | 0.8% | AZ431BZ-ATR | AZ431BZ-ATRE1 | AZ431BZ-A | AZ431BZ-AE1 | Ammo |
| SOIC-8 | -40 to 125°C | 0.4% | AZ431AM-A | AZ431AM-AE1 | AZ431AM-A | AZ431AM-AE1 | Tube |
| | | 0.4% | AZ431AM-ATR | AZ431AM-ATRE1 | AZ431AM-A | AZ431AM-AE1 | Tape & Reel |
| | | 0.8% | AZ431BM-A | AZ431BM-AE1 | AZ431BM-A | AZ431BM-AE1 | Tube |
| | | 0.8% | AZ431BM-ATR | AZ431BM-ATRE1 | AZ431BM-A | AZ431BM-AE1 | Tape & Reel |
| SOT-89 | -40 to 125°C | 0.4% | AZ431AR-ATR | AZ431AR-ATRE1 | 431A | E43A | Tape & Reel |
| | | 0.8% | AZ431BR-ATR | AZ431BR-ATRE1 | 431B | E43B | Tape & Reel |



ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Ordering Information (Continued)

20V Products

| Package | Temperature Range | Voltage Tolerance | Part Number | | Marking ID | | Packing Type |
|----------|-------------------|-------------------|-------------|---------------|------------|-------------|--------------|
| | | | Tin Lead | Lead Free | Tin Lead | Lead Free | |
| SOT-23-3 | -40 to 125°C | 0.4% | AZ431AN-BTR | AZ431AN-BTRE1 | N44 | EA4 | Tape & Reel |
| | | 0.8% | AZ431BN-BTR | AZ431BN-BTRE1 | N45 | EA5 | Tape & Reel |
| SOT-23-5 | -40 to 125°C | 0.4% | AZ431AK-BTR | AZ431AK-BTRE1 | K4A | E4A | Tape & Reel |
| | | 0.8% | AZ431BK-BTR | AZ431BK-BTRE1 | K4B | E4B | Tape & Reel |
| TO-92 | -40 to 125°C | 0.4% | AZ431AZ-B | AZ431AZ-BE1 | AZ431AZ-B | AZ431AZ-BE1 | Bulk |
| | | 0.4% | AZ431AZ-BTR | AZ431AZ-BTRE1 | AZ431AZ-B | AZ431AZ-BE1 | Ammo |
| | | 0.8% | AZ431BZ-B | AZ431BZ-BE1 | AZ431BZ-B | AZ431BZ-BE1 | Bulk |
| | | 0.8% | AZ431BZ-BTR | AZ431BZ-BTRE1 | AZ431BZ-B | AZ431BZ-BE1 | Ammo |
| SOIC-8 | -40 to 125°C | 0.4% | AZ431AM-B | AZ431AM-BE1 | AZ431AM-B | AZ431AM-BE1 | Tube |
| | | 0.4% | AZ431AM-BTR | AZ431AM-BTRE1 | AZ431AM-B | AZ431AM-BE1 | Tape & Reel |
| | | 0.8% | AZ431BM-B | AZ431BM-BE1 | AZ431BM-B | AZ431BM-BE1 | Tube |
| | | 0.8% | AZ431BM-BTR | AZ431BM-BTRE1 | AZ431BM-B | AZ431BM-BE1 | Tape & Reel |
| SOT-89 | -40 to 125°C | 0.4% | AZ431AR-BTR | AZ431AR-BTRE1 | 431C | E43C | Tape & Reel |
| | | 0.8% | AZ431BR-BTR | AZ431BR-BTRE1 | 431D | E43D | Tape & Reel |

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant.

**ADJUSTABLE PRECISION SHUNT REGULATORS****AZ431****Absolute Maximum Ratings (Note 1)**

| Parameter | Symbol | Value | Unit |
|------------------------------------|---------------|--------------------|------|
| Cathode Voltage | V_{KA} | AZ431 (40V): 40 | V |
| | | AZ431 (20V): 20 | |
| Cathode Current Range (Continuous) | I_{KA} | -100 to +150 | mA |
| Reference Input Current Range | I_{REF} | 10 | mA |
| Power Dissipation | P_D | M,Z,R Package: 770 | mW |
| | | N,K Package: 370 | |
| Junction Temperature | T_J | 160 | °C |
| Storage Temperature Range | T_{STG} | -65 to +150 | °C |
| Package Thermal Impedance | θ_{JA} | M Package: 150 | °C/W |
| | | N Package: 330 | |
| | | Z Package: 150 | |
| | | R Package: 50 | |
| | | K Package: 250 | |

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

| Parameter | Symbol | Min | Max | Unit |
|-------------------------------------|----------|-----------|----------------|------|
| Cathode Voltage | V_{KA} | V_{REF} | AZ431(40V): 36 | V |
| | | | AZ431(20V): 18 | |
| Cathode Current | I_{KA} | 1.0 | 100 | mA |
| Operating Ambient Temperature Range | | -40 | 125 | °C |



ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Electrical Characteristics for AZ431(40V)

Operating Conditions: $T_A=25^{\circ}\text{C}$ unless otherwise specified.

| Parameter | Test Circuit | Symbol | Conditions | AZ431 (40V) | | | Unit | |
|---|--------------|--|--|--|-------|-------|---------------|---|
| | | | | Min | Typ | Max | | |
| Reference Voltage | 0.4% | 4 | V_{REF} | $V_{KA}=V_{REF}, I_{KA}=10\text{mA}$ | 2.490 | 2.500 | 2.510 | V |
| | 0.8% | | | | 2.480 | 2.500 | 2.520 | |
| Deviation of Reference Voltage Over-Temperature | 4 | ΔV_{REF} | $V_{KA}=V_{REF}$ $I_{KA}=10\text{mA}$ | 0 to 70°C | 4.5 | 8 | mV | |
| | | | | -40 to 85°C | 4.5 | 10 | | |
| Ratio of Change in Reference Voltage to the Change in Cathode Voltage | 5 | $\frac{\Delta V_{REF}}{\Delta V_{KA}}$ | $I_{KA}=10\text{mA}$ | $\Delta V_{KA}=10\text{V to }V_{REF}$ | -1.0 | -2.7 | mV/V | |
| | | | | $\Delta V_{KA}=36\text{V to }10\text{V}$ | -0.5 | -2.0 | | |
| Reference Current | 5 | I_{REF} | $I_{KA}=10\text{mA}, R1=10\text{K}\Omega, R2=\infty$ | | 0.7 | 4 | μA | |
| Deviation of Reference Current Over Full Temperature Range | 5 | ΔI_{REF} | $I_{KA}=10\text{mA}, R1=10\text{K}\Omega, R2=\infty, T_A=-40\text{ to }85^{\circ}\text{C}$ | | 0.4 | 1.2 | μA | |
| Minimum Cathode Current for Regulation | 4 | $I_{KA}(\text{MIN})$ | $V_{KA}=V_{REF}$ | | 0.4 | 1.0 | mA | |
| Off-State Cathode Current | 6 | $I_{KA}(\text{OFF})$ | $V_{KA}=36\text{V}, V_{REF}=0$ | | 0.05 | 1.0 | μA | |
| Dynamic Impedance | 4 | Z_{KA} | $V_{KA}=V_{REF}, I_{KA}=1\text{ to }100\text{mA}, f \leq 1.0\text{KHz}$ | | 0.15 | 0.5 | Ω | |



ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Electrical Characteristics for AZ431(20V)

Operating Conditions: $T_A=25^{\circ}\text{C}$ unless otherwise specified.

| Parameter | Test Circuit | Symbol | Conditions | AZ431 (20V) | | | Unit | |
|---|--------------|--|--|--|-------|-------|----------------|---|
| | | | | Min | Typ | Max | | |
| Reference Voltage | 0.4% | 4 | V_{REF} | $V_{KA}=V_{REF}, I_{KA}=10\text{mA}$ | 2.490 | 2.500 | 2.510 | V |
| | 0.8% | | | | 2.480 | 2.500 | 2.520 | |
| Deviation of Reference Voltage Over-Temperature | 4 | ΔV_{REF} | $V_{KA}=V_{REF}$ $I_{KA}=10\text{mA}$ | 0 to 70°C | 4.5 | 8 | mV | |
| | | | | -40 to 85°C | 4.5 | 10 | | |
| Ratio of Change in Reference Voltage to the Change in Cathode Voltage | 5 | $\frac{\Delta V_{REF}}{\Delta V_{KA}}$ | $I_{KA}=10\text{mA}$ | $\Delta V_{KA}=10\text{V to }V_{REF}$ | -1.0 | -2.7 | mV/V | |
| | | | | $\Delta V_{KA}=18\text{V to }10\text{V}$ | -0.5 | -2.0 | | |
| Reference Current | 5 | I_{REF} | $I_{KA}=10\text{mA}, R1=10\text{K}\Omega, R2=\infty$ | | 0.7 | 4 | $\mu\text{ A}$ | |
| Deviation of Reference Current Over Full Temperature Range | 5 | ΔI_{REF} | $I_{KA}=10\text{mA}, R1=10\text{K}\Omega, R2=\infty$ $T_A=-40\text{ to }85^{\circ}\text{C}$ | | 0.4 | 1.2 | $\mu\text{ A}$ | |
| Minimum Cathode Current for Regulation | 4 | $I_{KA}(\text{MIN})$ | $V_{KA}=V_{REF}$ | | 0.4 | 1.0 | mA | |
| Off-State Cathode Current | 6 | $I_{KA}(\text{OFF})$ | $V_{KA}=18\text{V}, V_{REF}=0$ | | 0.05 | 1.0 | $\mu\text{ A}$ | |
| Dynamic Impedance | 4 | Z_{KA} | $V_{KA}=V_{REF}, I_{KA}=1\text{ to }100\text{mA}$ $f \leq 1.0\text{KHz}$ | | 0.2 | 0.5 | Ω | |



ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Electrical Characteristics (Continued)




Figure 4. Test Circuit 4 for $V_{KA} = V_{ref}$

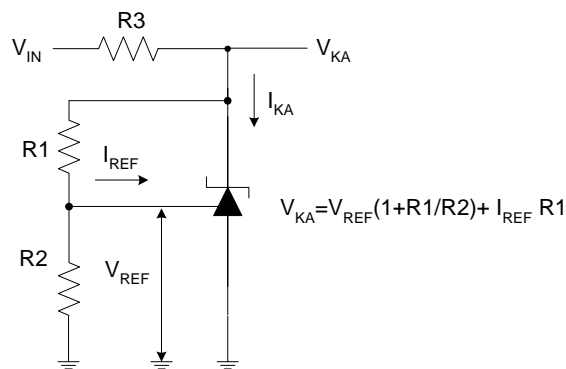


Figure 5. Test Circuit 5 for $V_{KA} > V_{ref}$

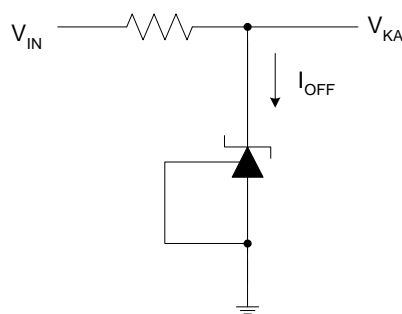


Figure 6. Test Circuit 6 for I_{OFF}



ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Typical Performance Characteristics

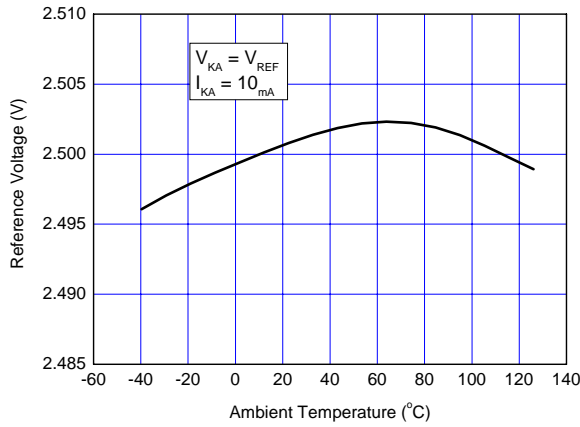


Figure 7. Reference Voltage vs. Ambient Temperature

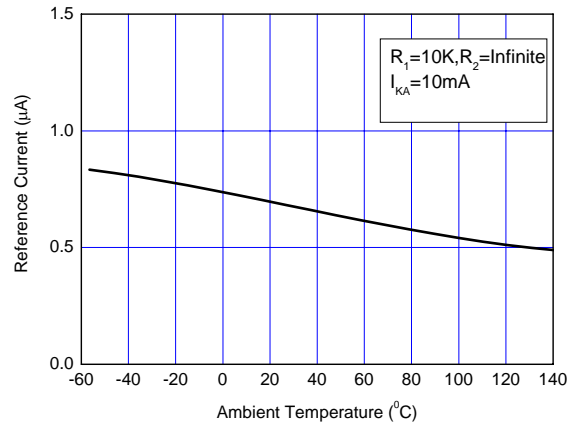


Figure 8. Reference Current vs. Ambient Temperature

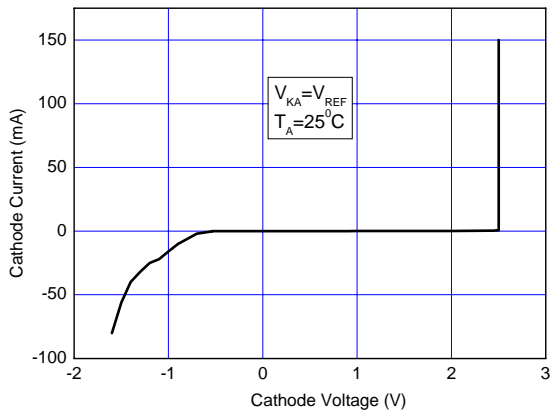


Figure 9. Cathode Current vs. Cathode Voltage

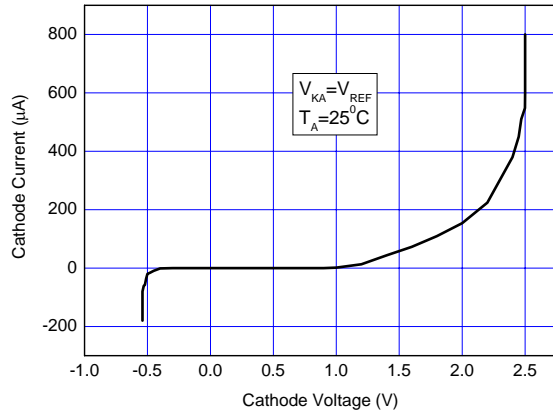


Figure 10. Current vs. Cathode Voltage



ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Typical Performance Characteristics (Continued)

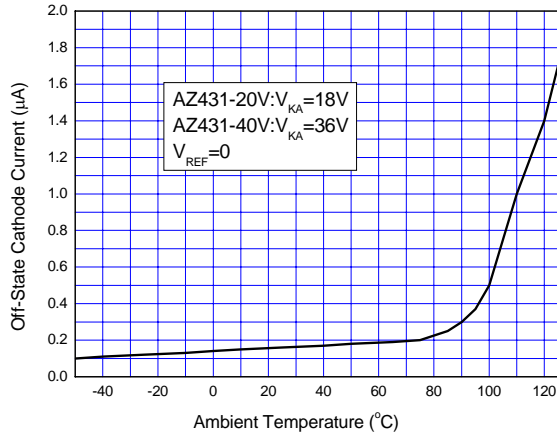


Figure 11. Off-state Cathode Current vs. Ambient Temperature

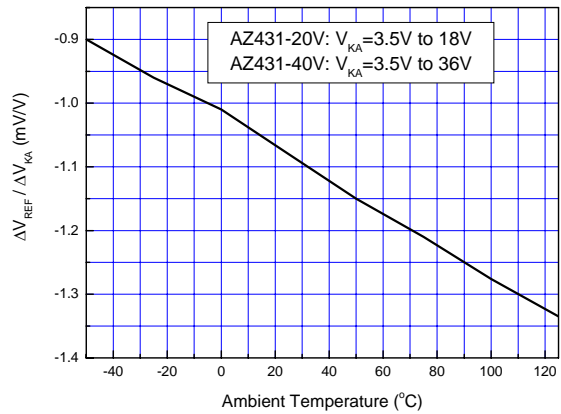


Figure 12. Ratio of Delta Reference Voltage to the Ratio of Delta Cathode Voltage


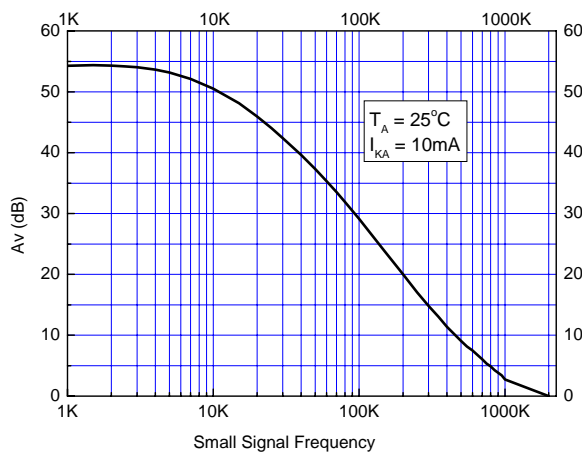


Figure 13. Small Signal Voltage Gain vs. Frequency



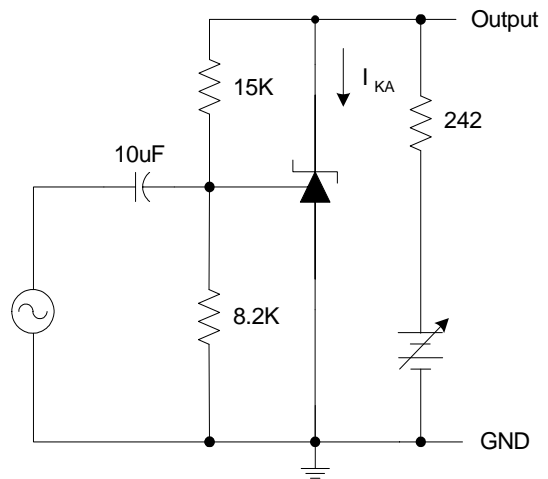

ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Typical Performance Characteristics (Continued)

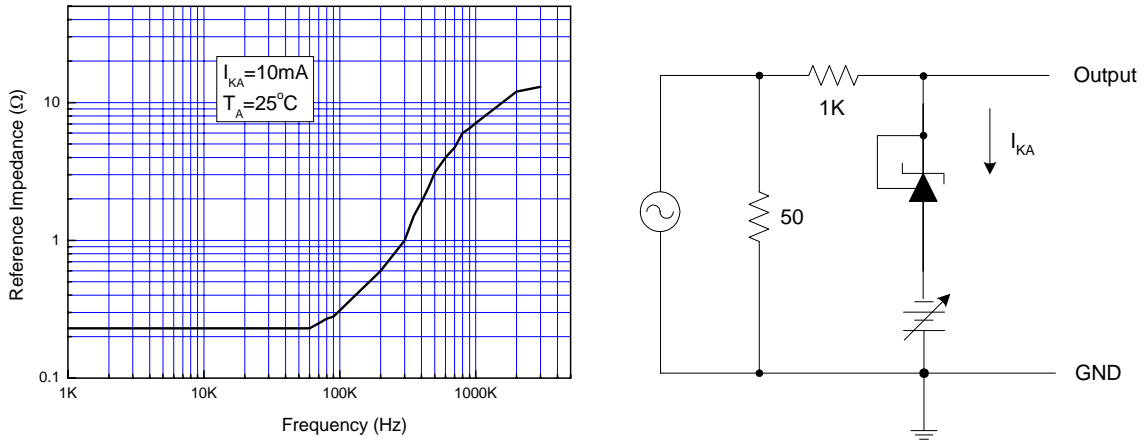


Figure 14. Reference Impedance vs. Frequency

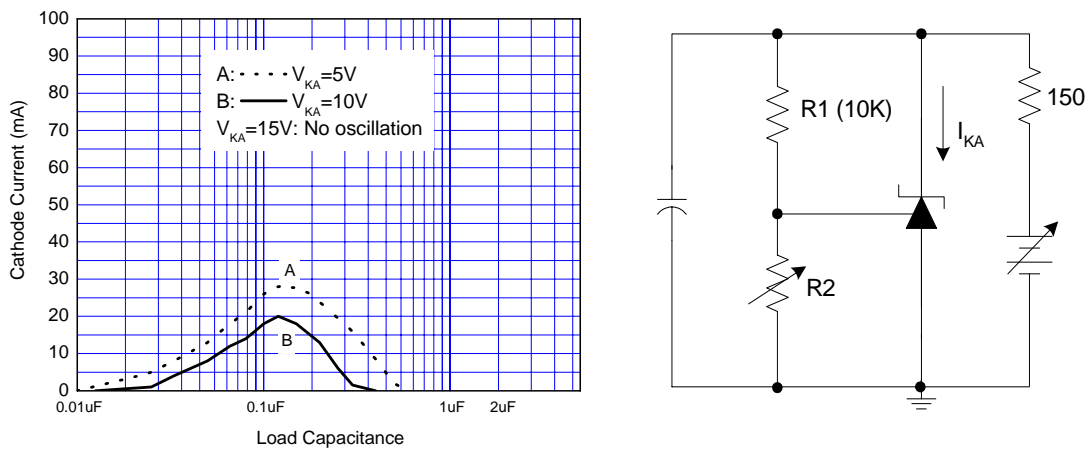


Figure 15. Stability Boundary Conditions vs. Load Capacitance



ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Typical Performance Characteristics (Continued)

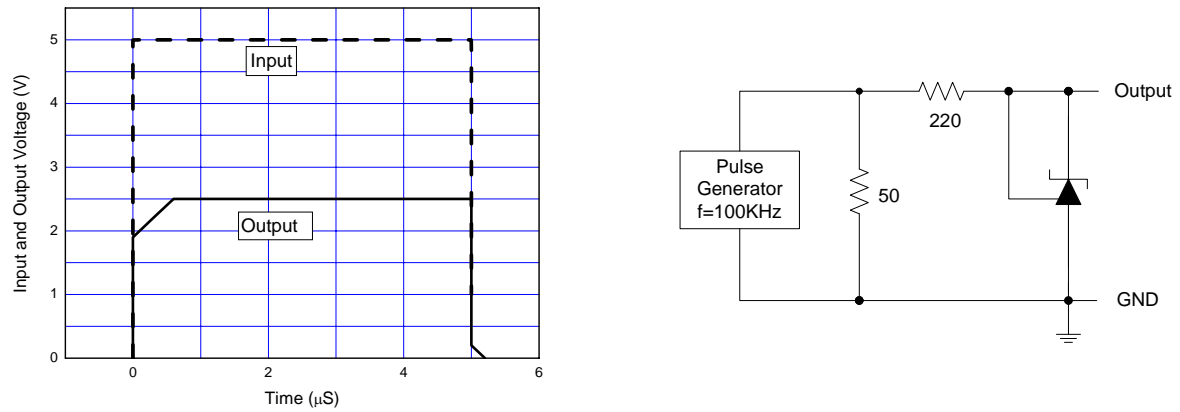


Figure 16. Pulse Response of Input and Output Voltage



ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Typical Application

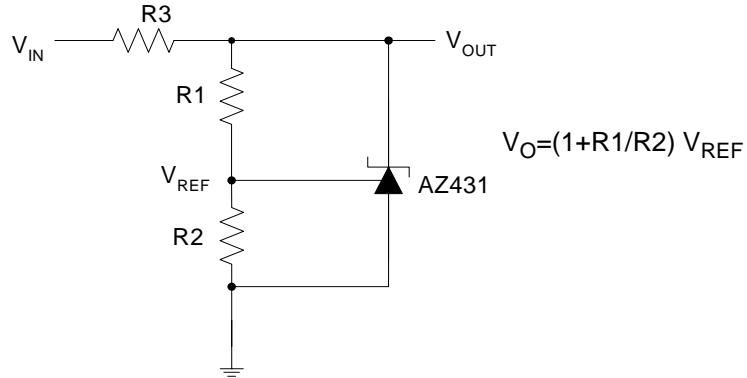


Figure 17. Shunt Regulator

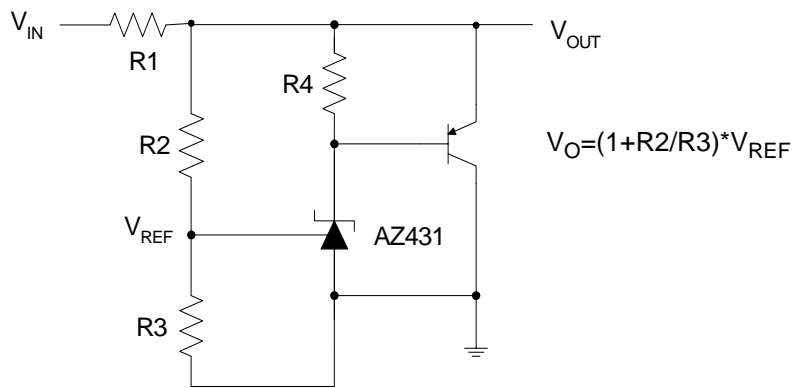


Figure 18. High Current Shunt Regulator

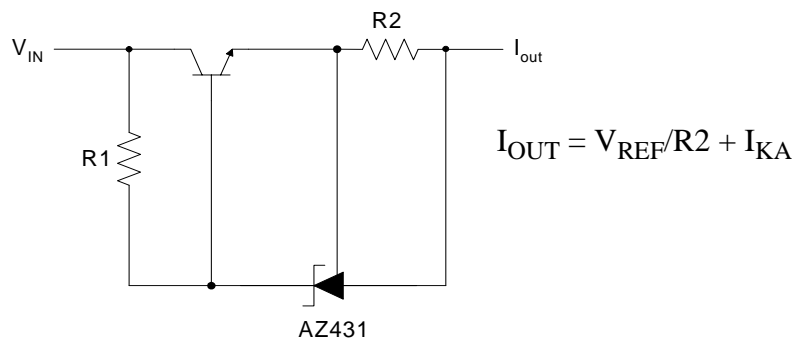


Figure 19. Current Source or Current Limit



ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Typical Application (Continued)

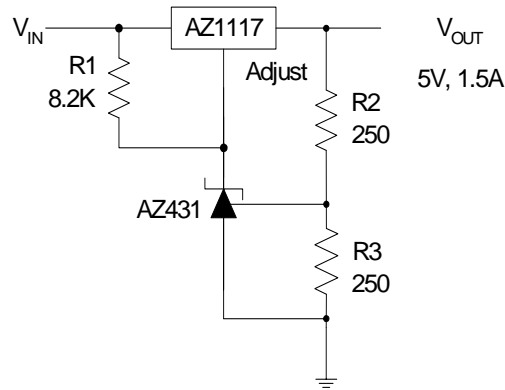


Figure20. Precision 5V 1.5A Regulator

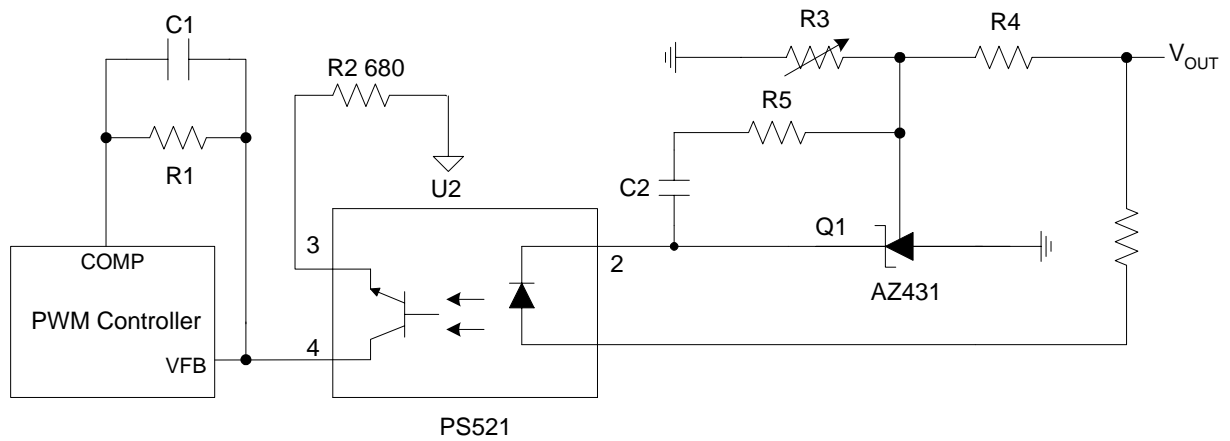


Figure 21. PWM Converter with Reference




ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Mechanical Dimensions

TO-92

Unit: mm (inch)

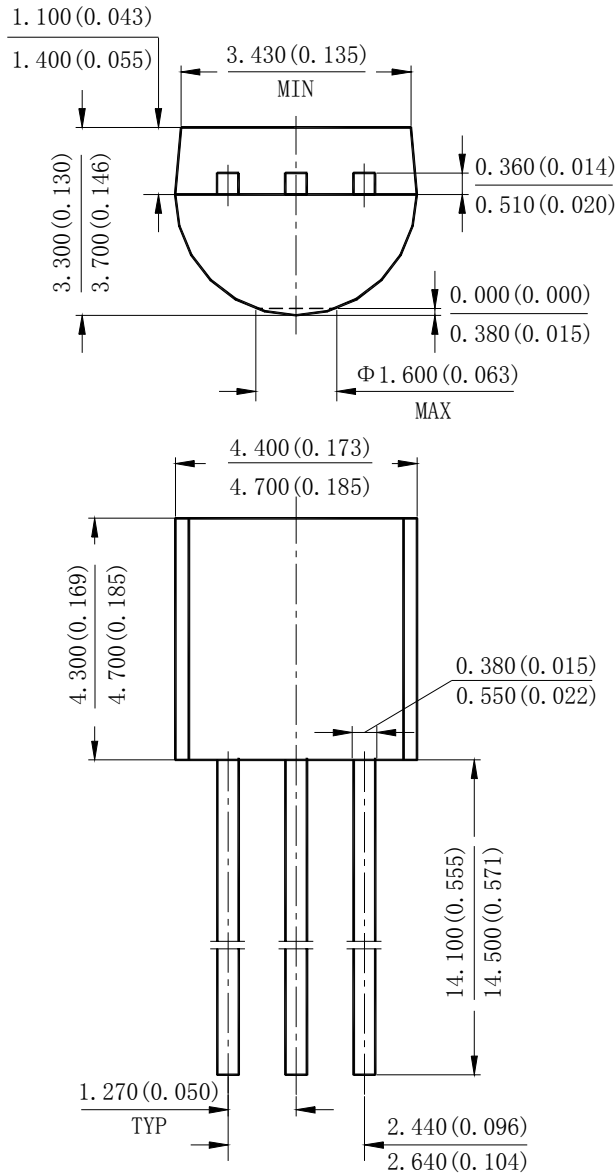




ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Mechanical Dimensions (Continued)

SOT-23-3

Unit: mm(inch)

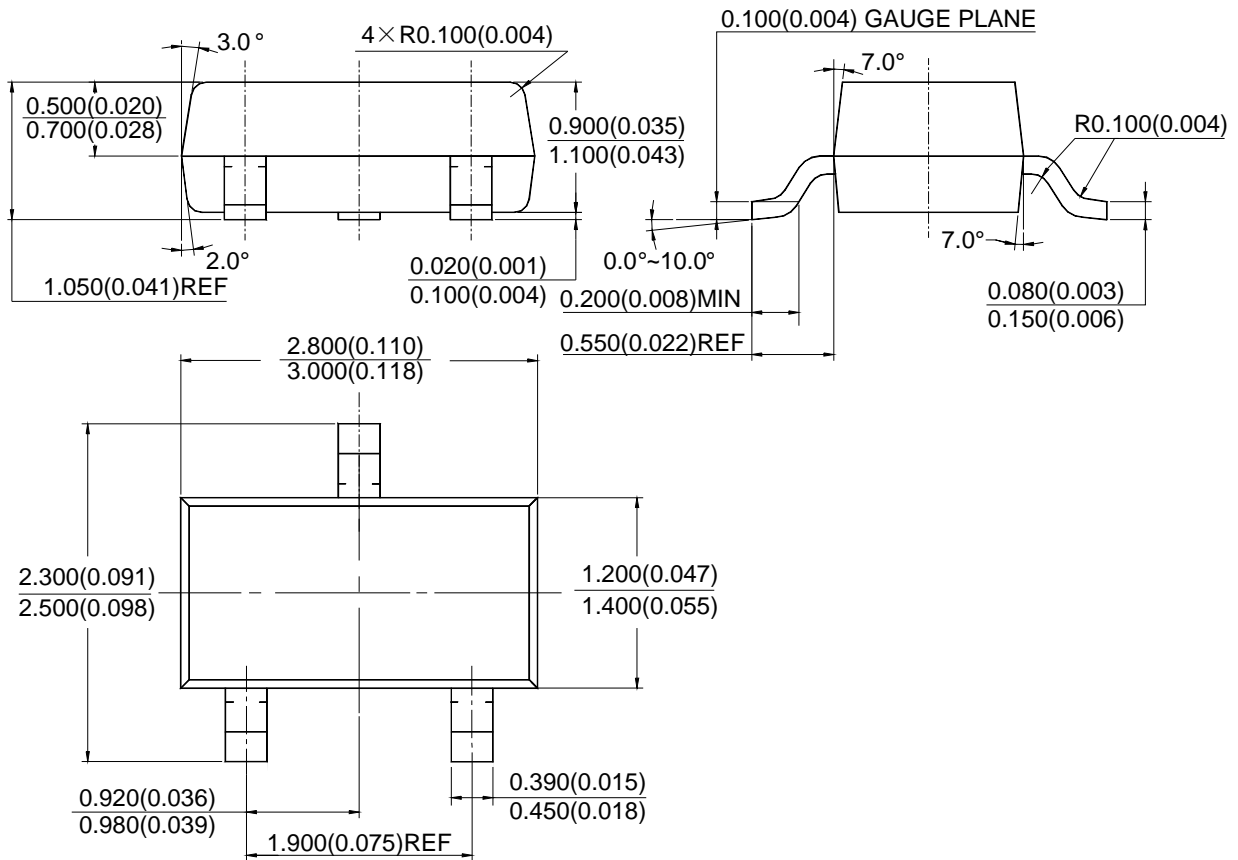




ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Mechanical Dimensions (Continued)

SOT-23-5

Unit: mm(inch)

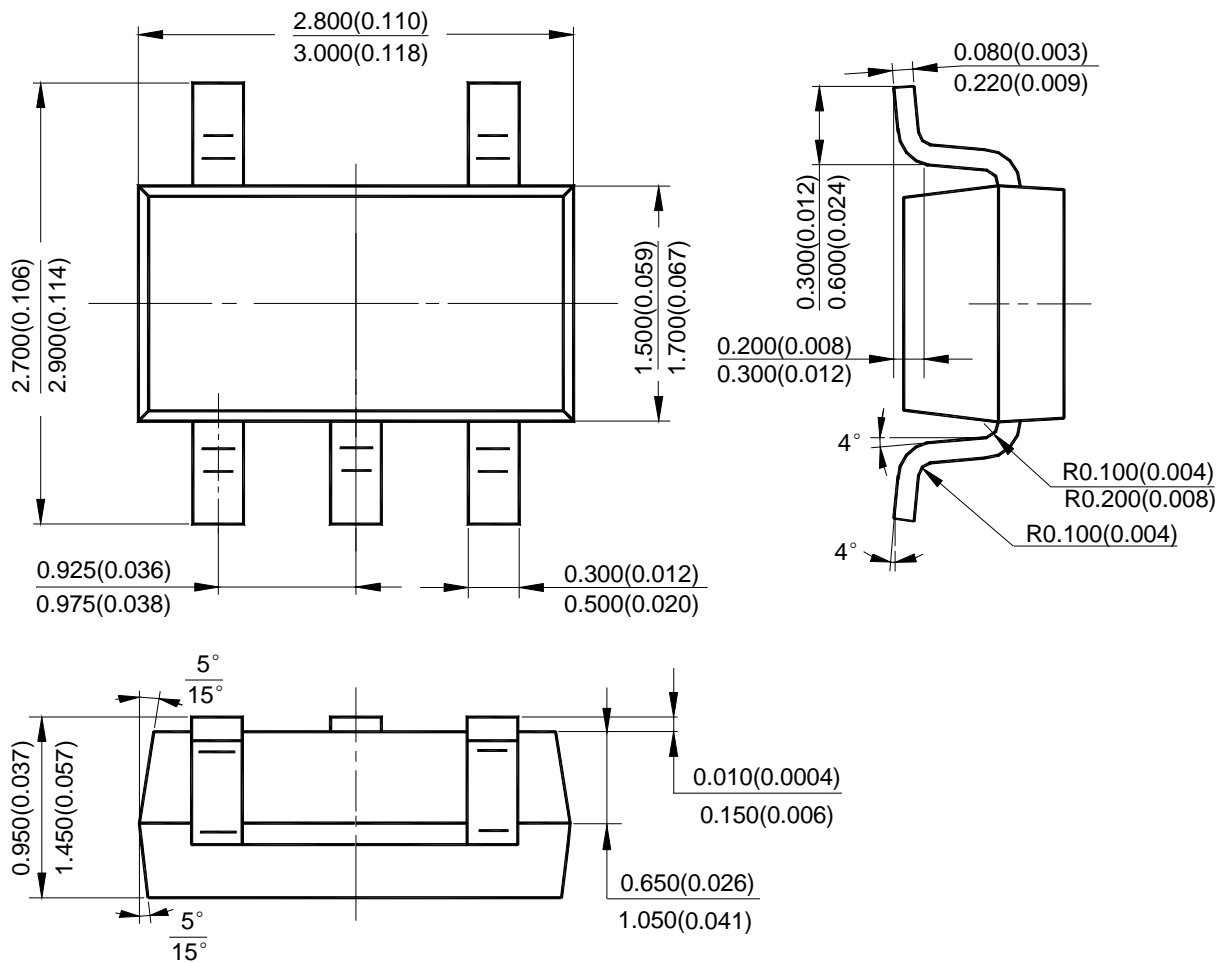




ADJUSTABLE PRECISION SHUNT REGULATORS

AZ431

Mechanical Dimensions (Continued)

SOIC-8

Unit: mm(inch)

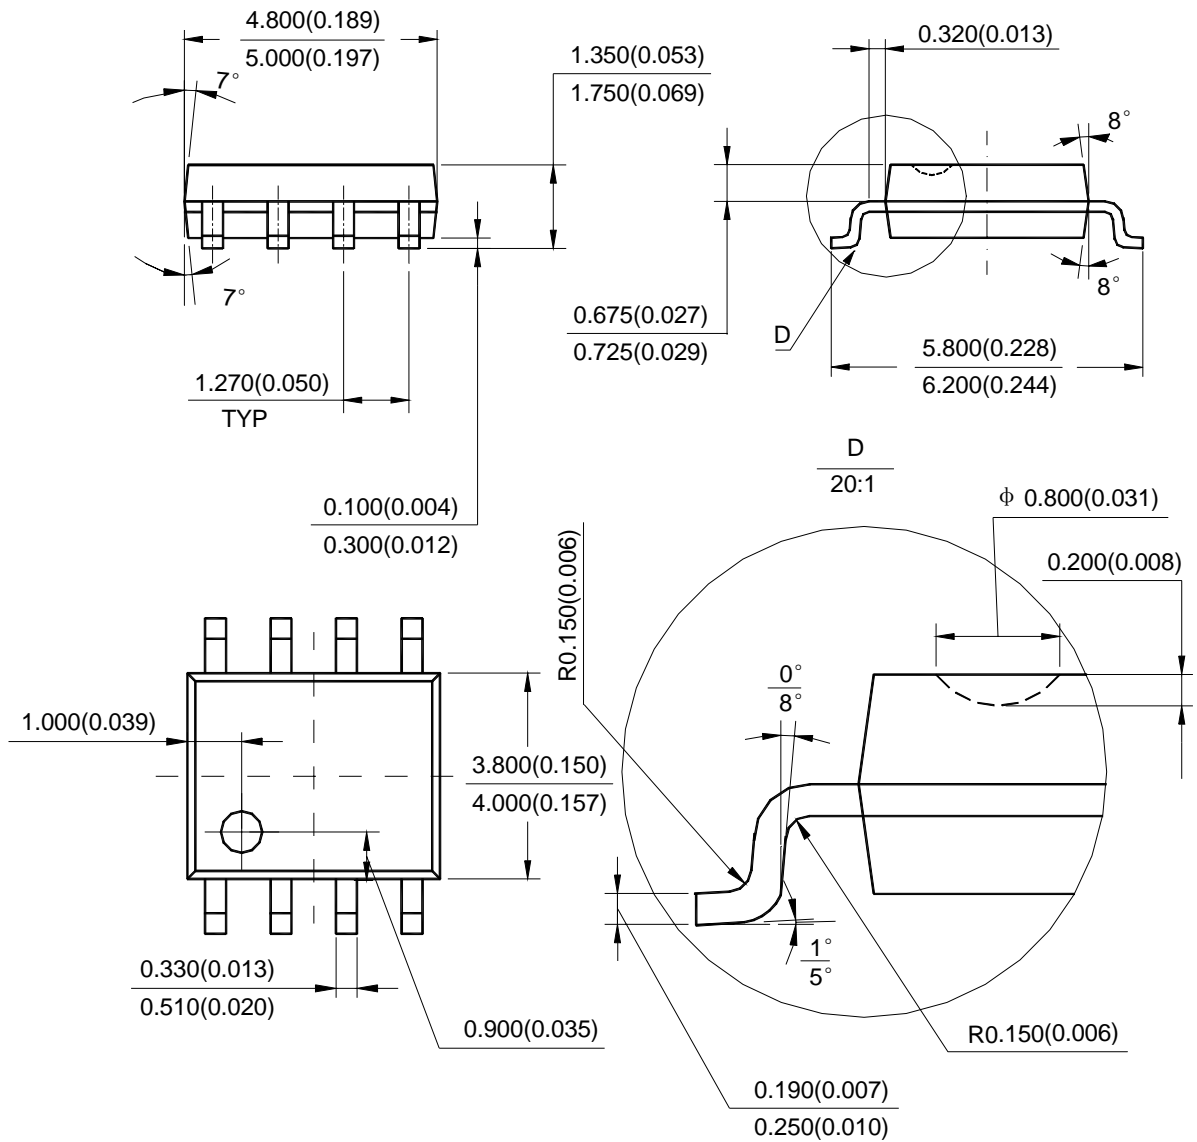



BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

BCD Semiconductor Corporation

3170 De La Cruz Blvd, Suite # 105 Santa Clara, CA 95054-2411, U.S.A

Tel: +1-408-988 6388, Fax: +1-408-988 6386

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.

800 Yi Shan Road, Shanghai 200233, PRC

Tel: +86-21-6485-1491, Fax: +86-21-5450-0008

Advanced Analog Circuits (Shanghai) Corporation

8F, B Zone, 900 Yi Shan Road, Shanghai 200233, PRC

Tel: +86-21-6495 9539, Fax: +86-21-6485 9673

BCD Semiconductor (Taiwan) Company Limited

Room 2210, 22nd Fl, 333, Keelung Road, Sec. 1, TaiPei (110), Taiwan

Tel: +886-2-2758 6828, Fax: +886-2-2758 6892

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

LinkMan:ChenWeiXin Mobile:13424222669 E-mail:2301768366@qq.com QQ:2301768366