

## **TO-220 Power Resistor**




#### Features

- -30 watts at 25°C case temperature heat sink mounted
- -TO-220 style power package
- -Single screw mounting to heat sink
- Molded case for protection and easy to mount
- Electrically isolated case
- -Non-Inductive design

# ■Applications

- -Gate Resistors in Power Supplies
- -Snubbers
- -Load and Dumping Resistors in CRT Monitors
- -Terminal Resistance in RF Power Amplifiers
- Voltage Regulation
- -Low Energy Pulse Loading
- $-\mathsf{UPS}$

### Construction




1	Alumina Substrate	3	Lead
2	Resistor Layer	4	Molding


### **■**Dimensions

Unit: mm

Туре	Weight (g) (1000pcs)
TR30	1155

# ■Derating Curve



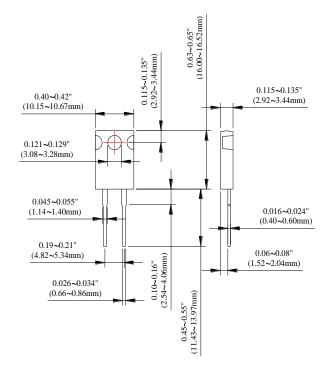

For detail questions, contact : sales@viking.com.tw


1

Edition : REV.B1 Revision: 9-Apr-2013

#### **TO-220 Power Resistor**



## **■**Part Numbering

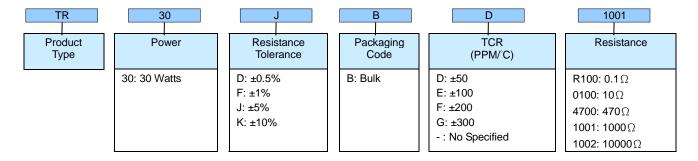

# **■**Electrical Characteristics Specifications

Item		TCR (PPM/°C)			
Туре	±0.5%	±1%	±5%	±10%	, , , , , , , , , , , , , , , , , , , ,
	=	-	0.05Ω -1Ω		No Specified
	-	>1Ω -3Ω			±300
TR30	-	>3Ω -10Ω			±100 ±200
	>10Ω –10ΚΩ			±50 ±100 ±200	

- Operating Voltage: 420V max.
- Dielectric Strength: 1800VAC
- Insulation Resistance: 10GΩ min.
- Working Temperature Range: -65°C to +150°C
- Resistance Value < 1Ω is available

### ■ Environmental Characteristics

ltem	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	Referenced to 25°C, ∆R taken at +105°C
Short Time Overload	ΔR±0.3%	2 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds
Load Life	ΔR±1.0%	2,000 hours at rated power
Damp Heat with Load	ΔR±0.5%	40±2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	90% min. coverage	245±5°C for 3 seconds
Thermal Shock	ΔR±0.3%	-65°C~150°C, 100 cycles
Terminal Strength	ΔR±0.2%	(Pull Test) 2.4N
Vibration, High Frequency	ΔR±0.2%	20g peak

- Lead Material: Tinned Copper
- Maximum Torque: 0.9 N-m
- When in Free Air at 25°C, the TR30 is Rated for 2.25W
- The Case Temperature is to be used for the Definition of the Applied Power Limit
- The Case Temperature Measurement must be made with a Thermocouple Contacting the Center of the Component mounted on the Designed Heat Sink.
- Thermal Grease should be Applied Properly

RCWV(Rated continuous working voltage)= √(P\*R) or Max. Operating voltage whichever is lower

Edition : REV.B1 Revision: 9-Apr-2013