



EVERLIGHT ELECTRONICS CO.,LTD.

DEVICE NUMBER : DLE-952-115 REV : 1.0
ECN : _____ PAGE : 1/5

1.8mm Round Subminiature "Gull Wing" Lead (Square Base) LEDs

PART NO. : 95-21SURC/S530-A3/TR7 TEL:020-22074733 QQ:2462655096

Features :

- Package in 12mm tape on 7" diameter reels.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- IC compatible.
- EIA std package.
- Mono-color type.


Descriptions :

- The 95-21 SMD taping is much smaller than lead frame type compoments. Thusenable smaller board size. Higher packing density. Reduced storage space and finally smaller equipment to be obtained.
- Besides, light weight makes them ideal for miniature applications, etc.
- Furthermore by automation assembly machines : 400 accuracy is anticipated.

Applications :

- Small indicator for outdoor applications.
- Flat backlight for LCD, switches and symbols.
- Indicator and backlight in offic equipment.
- Indicator and backlight for battery driven equipment.
- Indicator and backlight for audio and video equipment.
- Automotive : backlighting in dashboards and switches.
- Telecommunication : indicator and backlighting in telephone and fax.
- General use.

Package Dimensions :

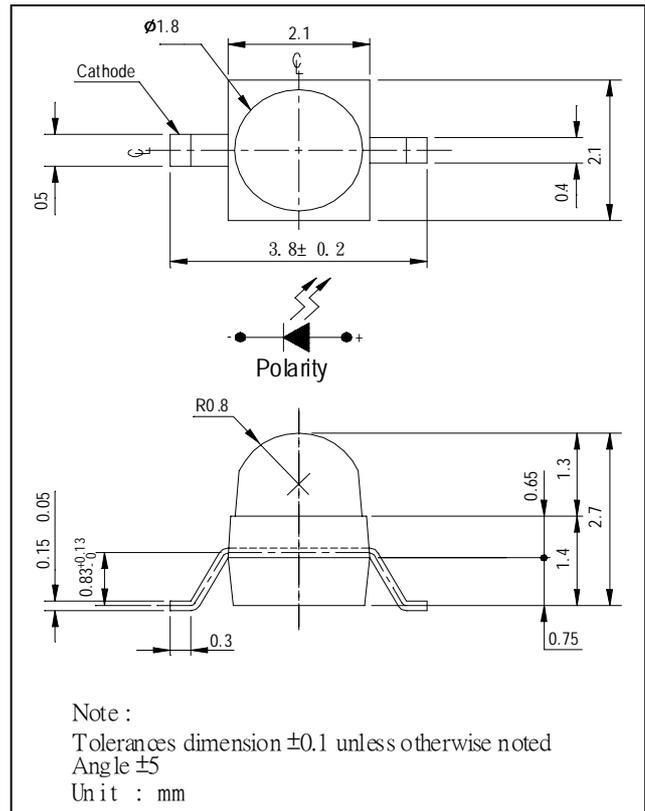

PART NO.	Chip		Lens Color
	Material	Emitted Color	
95-21SURC/S530-A3/TR7	AlGaInP	Hyper Red	Water Clear

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.
 TEL : 886-2-2267-2000,2267-9936
 FAX : 886-2-2267-6244,22676189,22676306
<http://www.everlight.com>



EVERLIGHT ELECTRONICS CO.,LTD.


DEVICE NUMBER : DLE-952-115 REV : 1.0

ECN : _____ PAGE : 2/5


1.8mm Round Subminiature "Gull Wing" Lead (Square Base) LEDs

PART NO. : 95-21SURC/S530-A3/TR7

■ Package Dimensions

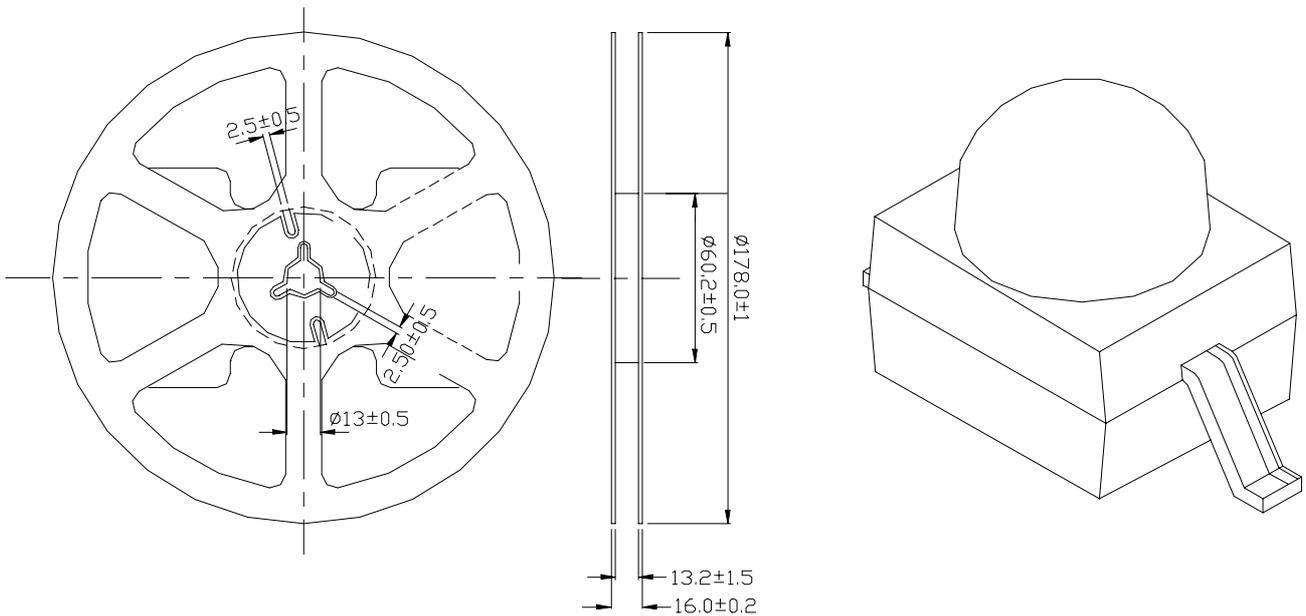

■ Loaded Quantity Per Reel 1000 Pcs/Reel

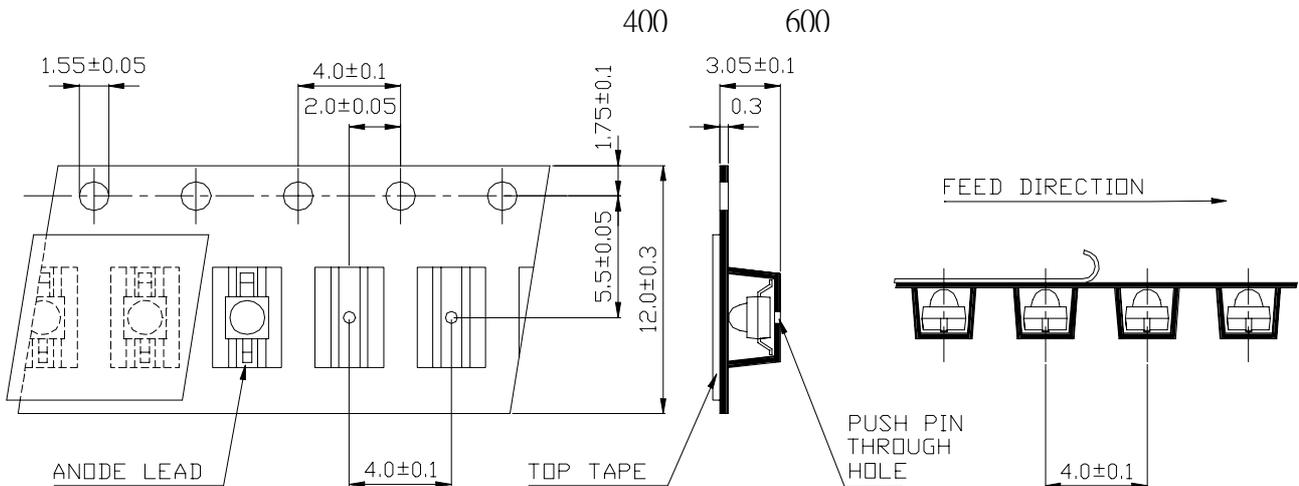

1. All dimensions are in millimeters.
2. Lead spacing is measured where the lead emerge from the package
3. Protruded resin under flange 1.5 mm (0.59") max.



EVERLIGHT ELECTRONICS CO.,LTD.

DEVICE NUMBER : DLE-952-115 REV : 1.0ECN : _____ PAGE : 3/5

1.8mm Round Subminiature "Gull Wing" Lead (Square Base) LEDs

PART NO. : 95-21SURC/S530-A3/TR7

■ Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_F	25	mA
Operating Temperature	T_{opr}	-40 ~ +85	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 ~ +100	$^\circ\text{C}$
Soldering Temperature	T_{sol}	260 ± 5 for 5 sec	$^\circ\text{C}$
Electrostatic Discharge	ESD	2000	V
Power Dissipation	P_d	60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	$I_F(\text{Peak})$	160	mA

■ Electronic Optical Characteristics :







Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	I_v	----	36	----	mcd	$I_F = 2\text{mA}$
Luminous Intensity	I_v	400	600	----	mcd	$I_F = 20\text{mA}$
Viewing Angle	2θ	----	25	----	deg	
Peak Wavelength	λ_p	----	632	----	nm	
Dominant Wavelength	λ_d	----	624	----	nm	
Spectrum Radiation Bandwidth	$\Delta\lambda$	----	20	----	nm	
Forward Voltage	V_F	----	2.0	2.4	V	
Reverse Current	I_R	----	----	10	μA	$V_R = 5\text{V}$



1.8mm Round Subminiature "Gull Wing" Lead (Square Base) LEDs

PART NO. : 95-21SURC/S530-A3/TR7

■ Typical Electro-Optical Characteristic Curves

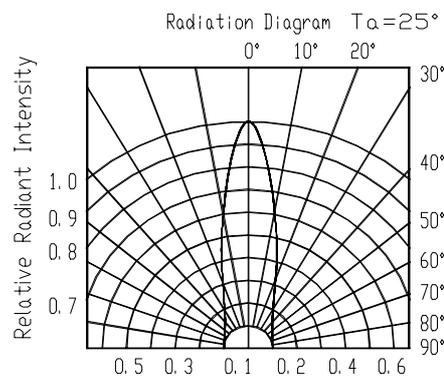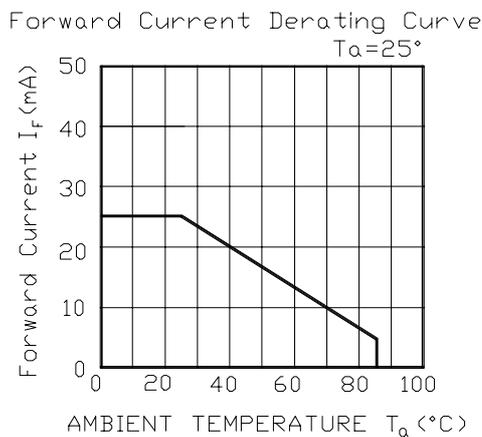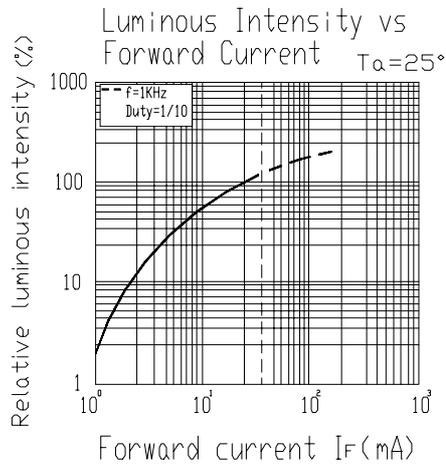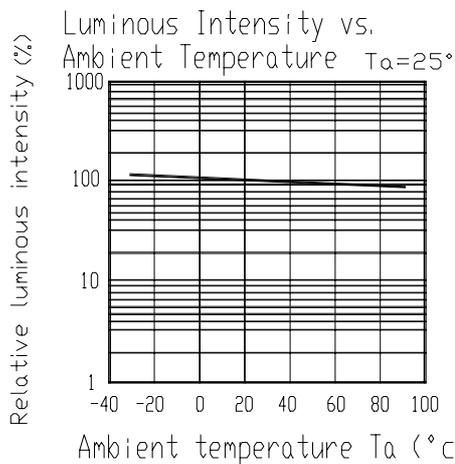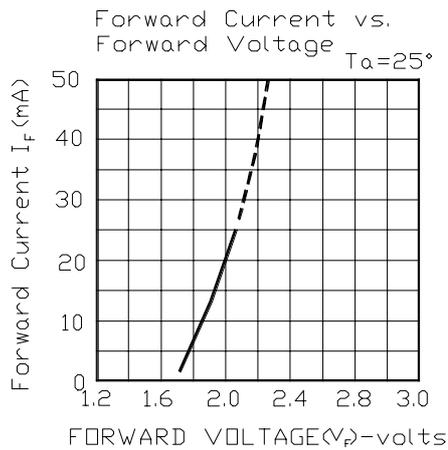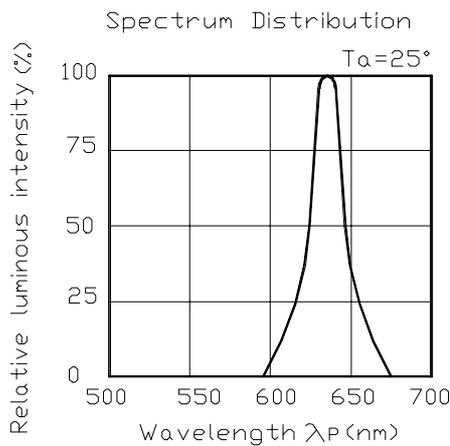



EVERLIGHT ELECTRONICS CO.,LTD.

DEVICE NUMBER : DLE-952-115 REV : 1.0

ECN : _____ PAGE : 5/5

1.8mm Round Subminiature "Gull Wing" Lead (Square Base) LEDs

PART NO. : 95-21SURC/S530-A3/TR7

■ Reliability Test Items And Conditions

NO.	Item	Test Conditions	Test Hours/ Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP. : 260°C ± 5 °C	5 SEC.	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30 min. § 5 min. L : -55°C 30 min.	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5 min. § 10 sec. L : -10°C 30 min.	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP. : +100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP. : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	I _F = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C / 85% R H	1000 HRS	76 PCS	0/1