
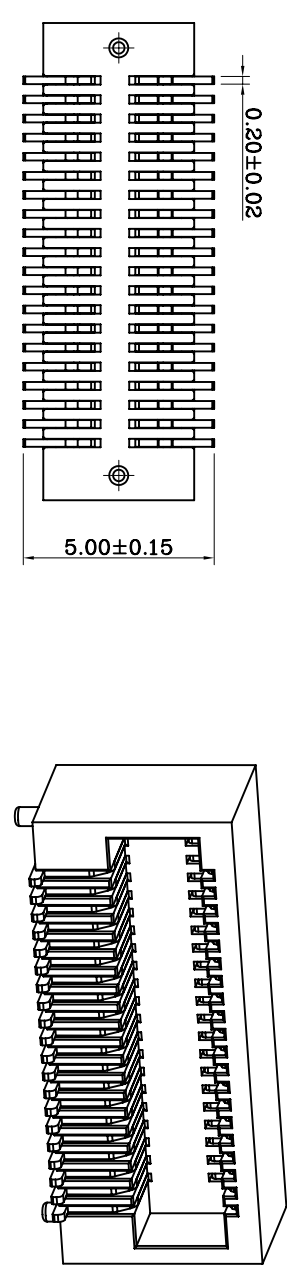
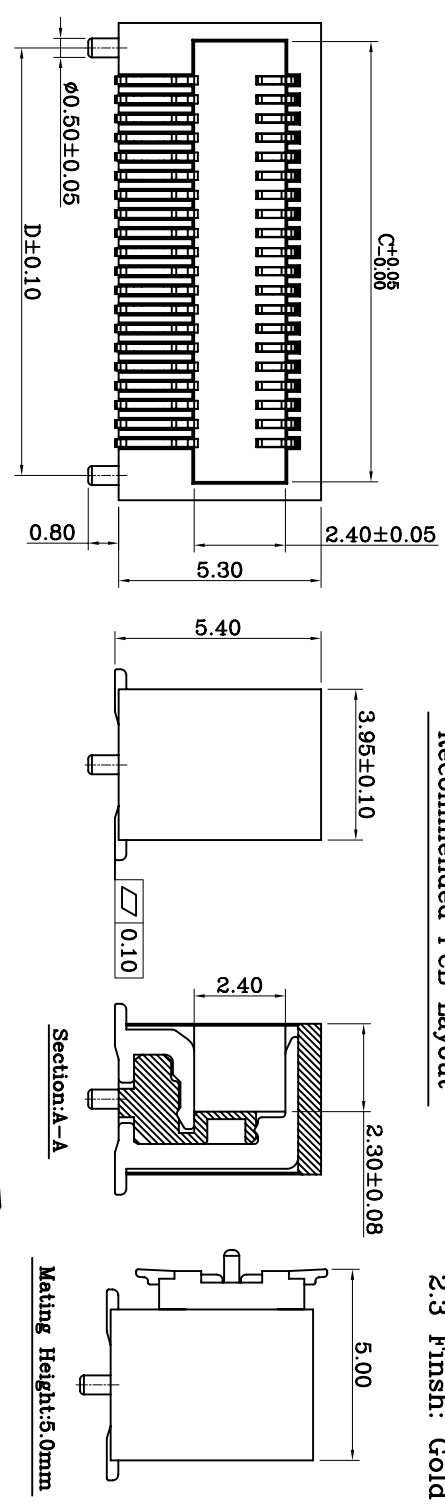


- Specification:
  - Current rating: 0.3A AC/DC
  - Voltage rating: 50V AC/DC
  - Contact resistance: 60m milliohms max
  - Insulation resistance: 100 Mega ohms min
  - Withstanding voltage: 500V AC/minute
  - Temperature range: -25°C to +80°C
- Material and Plating
  - Insulator: PA9T, Plastic (UL94V-0)
  - Contact: Brass
  - Finish: Gold Plated

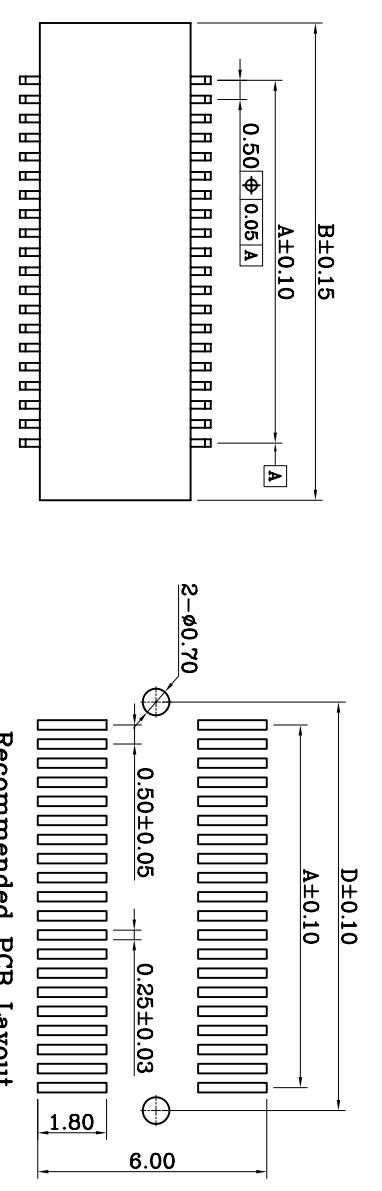

Pin	Dim A	Dim B	Dim C	Dim D
2x5	2.00	5.00	4.03	3.70
2x6	2.50	5.50	4.53	4.20
2x7	3.00	6.00	5.03	4.70
2x8	3.50	6.50	5.53	5.20
2x9	4.00	7.00	6.03	5.70
2x10	4.50	7.50	6.53	6.20
2x11	5.00	8.00	7.03	6.70
2x12	5.50	8.50	7.53	7.20
2x13	6.00	9.00	8.03	7.70
2x14	6.50	9.50	8.53	8.20
2x15	7.00	10.00	9.03	8.70
2x16	7.50	10.50	9.53	9.20
2x17	8.00	11.00	10.03	9.70
2x18	8.50	11.50	10.53	10.20
2x19	9.00	12.00	11.03	10.70
2x20	9.50	12.50	11.53	11.20

**DRAWING:**  
杨朝

**CHECKED:**  
杨朝

**GENERAL TOLERANCE**  
.X: ±0.2  
.XX: ±0.08  
.XXX: ±0.03

**ANGLE:**  
.X°: ±2°  
.XX°: ±1°  
.XXX°: ±0.5°

**UNIT:** MM

**PROJECTION:**

深圳市山谷道电子有限公司  
电话: 0755-27759859 传真: 0755-27759850

DRAWING:		APPROVAL:		SCALE: 1/1		SHEET: 1/1	
CHECKED:		APPROVAL:		SCALE: 1/1		SHEET: 1/1	
NO. 1		DATE		DESCRIPTION		APPROVAL	
NO. 2		DATE		DESCRIPTION		APPROVAL	
NO. 3		DATE		DESCRIPTION		APPROVAL	
NO. 4		DATE		DESCRIPTION		APPROVAL	
NO. 5		DATE		DESCRIPTION		APPROVAL	

**DESCRIPTION:**  
0.5mm Board to Board Socket R/A Type

**PART NO:** 101FXXU-A1Q1-A1RW1B

**DRAWING NO:** P1101FXXU-A1RW1B-01

**REV:** 1.0

**SIZE:** A4