



VER	DETAIL DISCRPTION	DATE
00	FIRST ISSUE	2011-7-11

INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

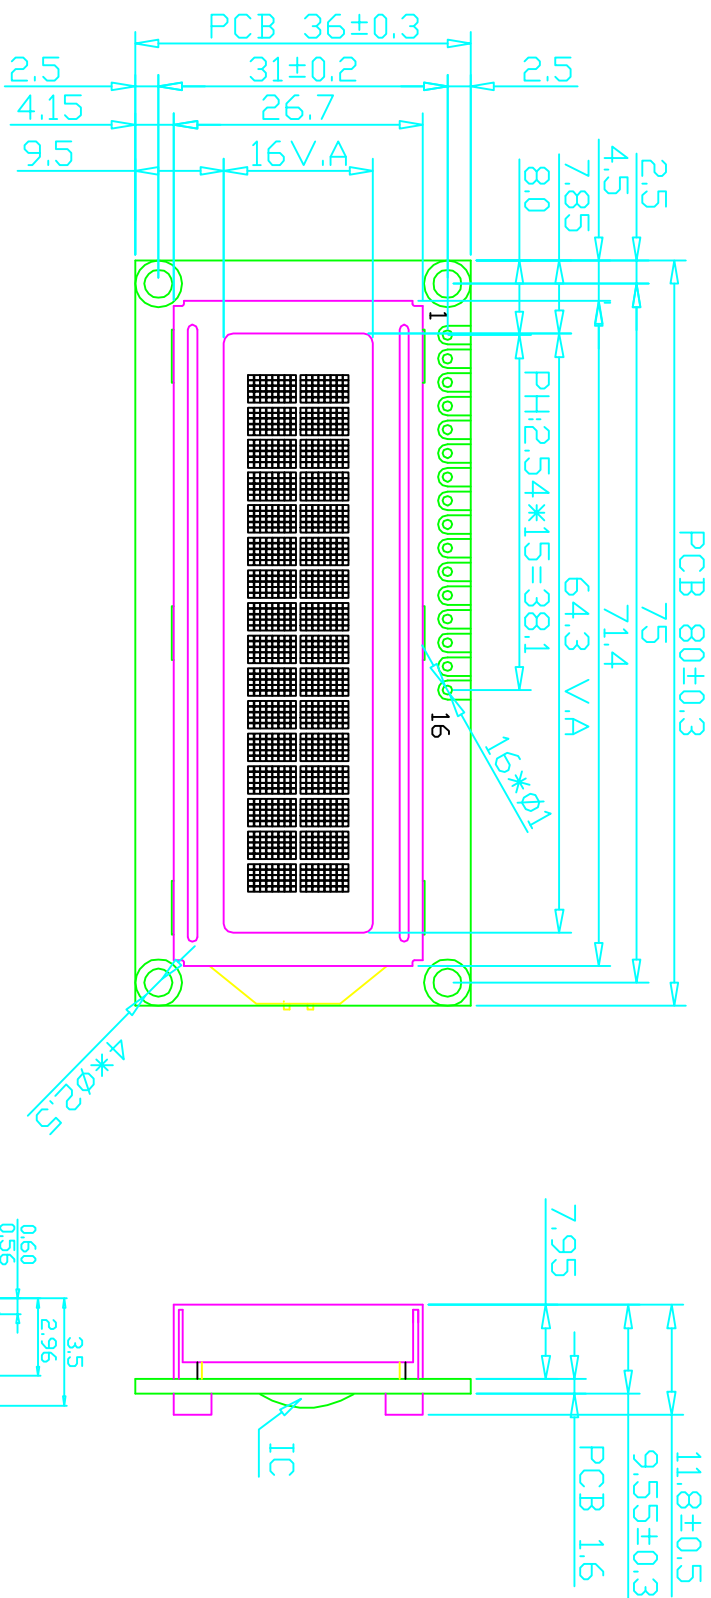

DOT SIZE:

SPECIFICATION:

- 1). STN(BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/16. BIAS: 1/5. VOP=5.0V
- 3). VIEWING ANGLE: 6 0°CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -25~80°C
- 5). BACKLIGHT: WHITE I=20MA
- 6). DRIVE IC: SPLC780
- 7). DRIVE POWER: VDD=5.0V

深圳市金彩科技有限公司

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/7/11	LCM1602C	PROJECTION:	1 OF 1
CHECKED BY:					DATE:
CUSTOM NO.:					2011/7/11

DO NOT SCALE THIS DRAWING.