
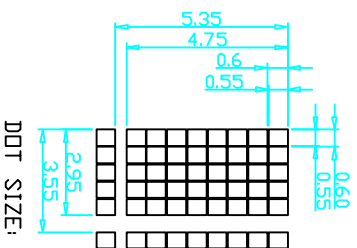
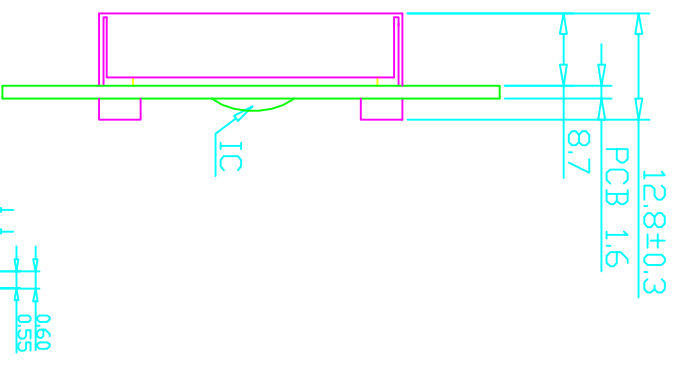


| INTERFACE | |
|-----------|-----------|
| 1 | VSS |
| 2 | VDD(5V) |
| 3 | V0 |
| 4 | RS |
| 5 | RW |
| 6 | E |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | LED-A(5V) |
| 16 | LED-K |

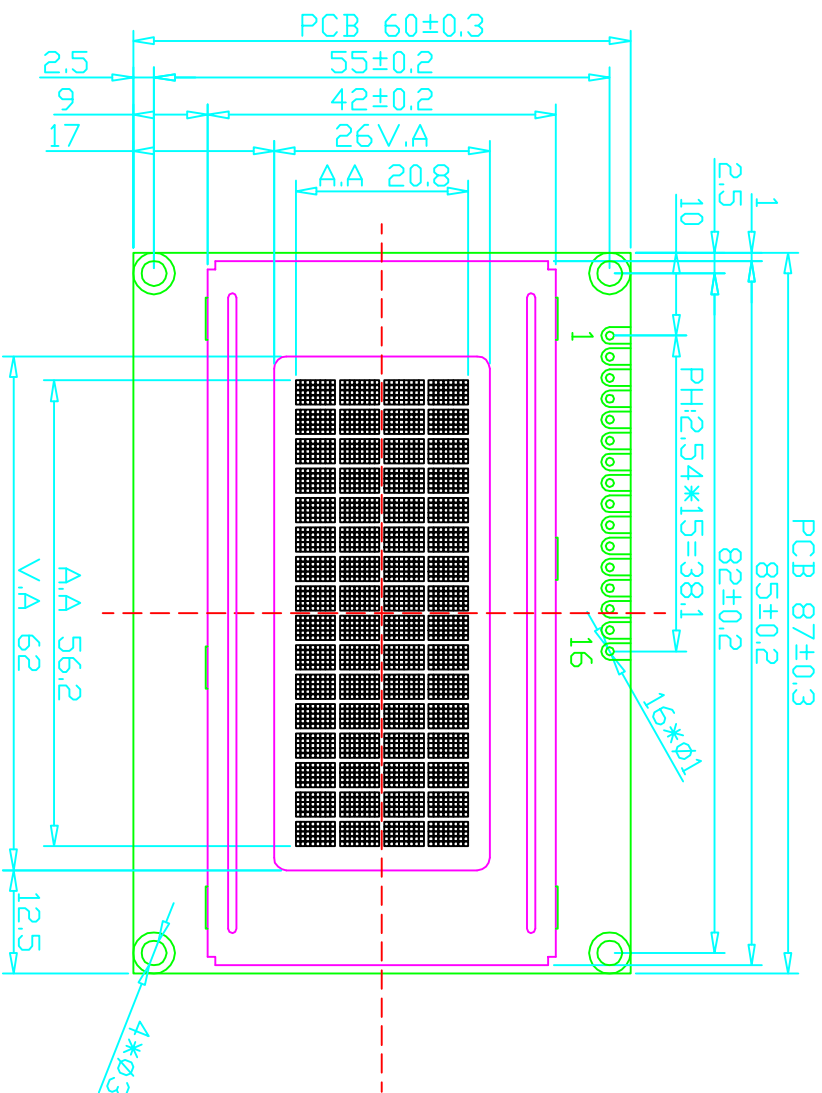

SPECIFICATION:

- 1). STN(BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/16. BIAS: 1/5. VOP=4. 8V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: WHITE I=40MA
- 6). DRIVE IC: SPLC780
- 7). DRIVE POWER: VDD=5. 0V

| VER | DETAIL DESCRIPTION | DATE |
|-----|--------------------|-----------|
| 00 | FIRST ISSUE | 2011-8-29 |

深圳市金彩科技有限公司

| | | | | | | |
|------------------------|-------|-----------|-----------|--------------|------------|-----------|
| Unspecified Tolerance: | ±0.20 | UNITS: mm | DATE: | MODE NUMBER: | PROJECTION | SHEET: |
| DESIGN BY: | WZQ | | 2011/8/29 | LCM1604B | | 1 OF 1 |
| CHECKED BY: | | | | | | DATE: |
| CUSTOM NO.: | | | | | | 2011/8/29 |

DO NOT SCALE THIS DRAWING.