



VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2011-11-7

INTERFACE	
1	DB0
2	DB1
3	DB2
4	DB3
5	DB4
6	DB5
7	DB6
8	DB7
9	E1
10	RW
11	RS
12	V0
13	VSS
14	VDD(5V)
15	E2
16	N.C
17	LED-A(5V)
18	LED-K

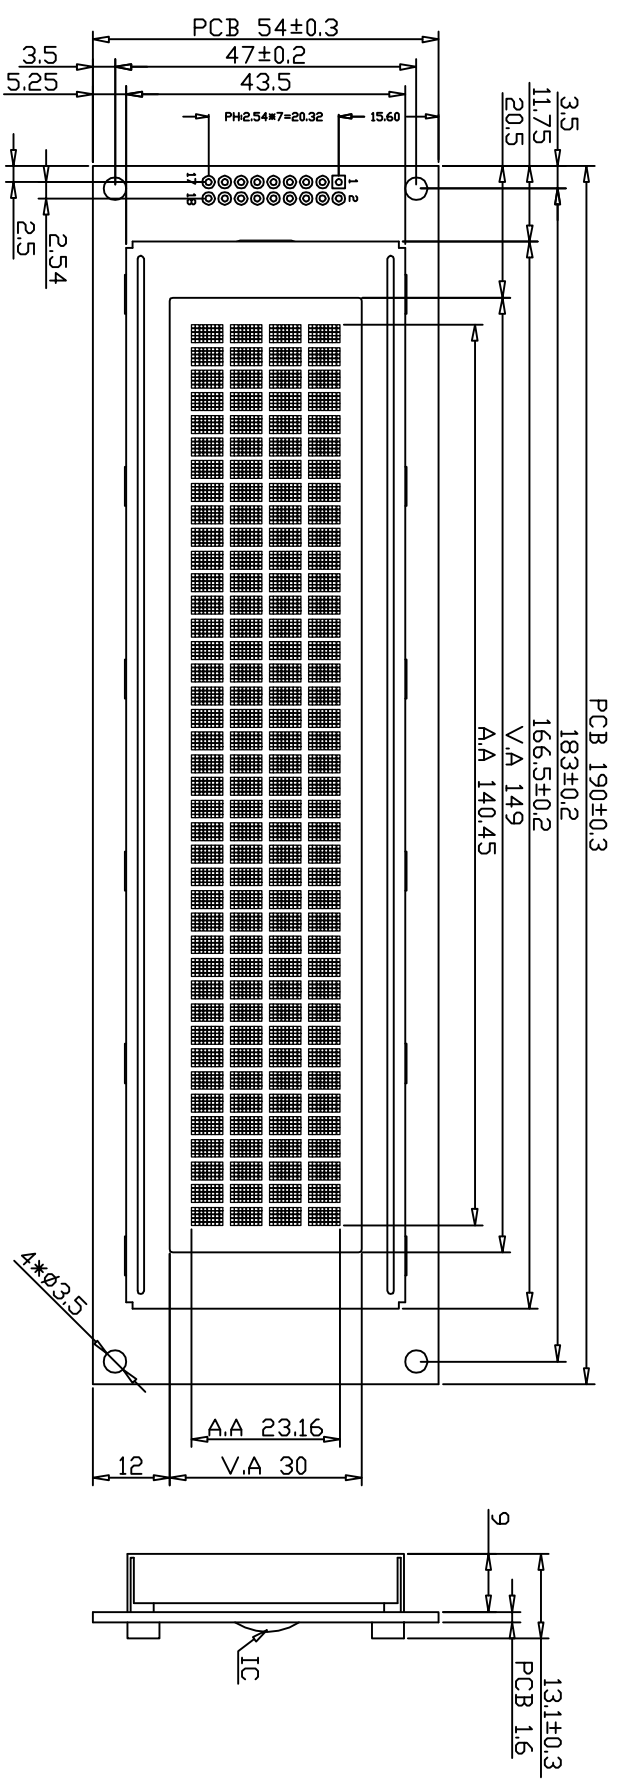

SPECIFICATION:

- 1). STN(Y-G)/POSITIVE/TRANSFLECTIVE
- 2). DUTY: 1/16. BIAS: 1/5. VOP=4.7V
- 3). VIEWING ANGLE: 6 0°CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: Y-G I=460MA
- 6). DRIVE POWER: VDD=5.0V

深圳金彩科技有限公司

Unspecified Tolerance:	±0.20	UNITS:mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ		2011/11/7	LCM4004A	1 OF 1
CHECKED BY:					DATE:
CUSTOM NO.:					2011/1/7

DO NOT SCALE THIS DRAWING.