

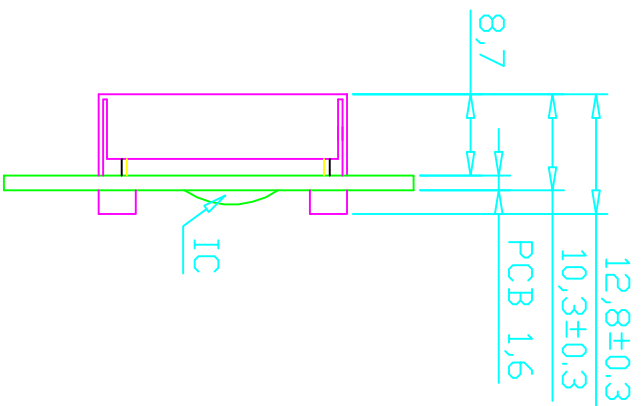


INTERFACE	
1	VDD(5V)
2	VSS
3	V0
4	RST
5	E1
6	E2
7	R/W
8	RS
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LED-A(5V)
18	LED-K

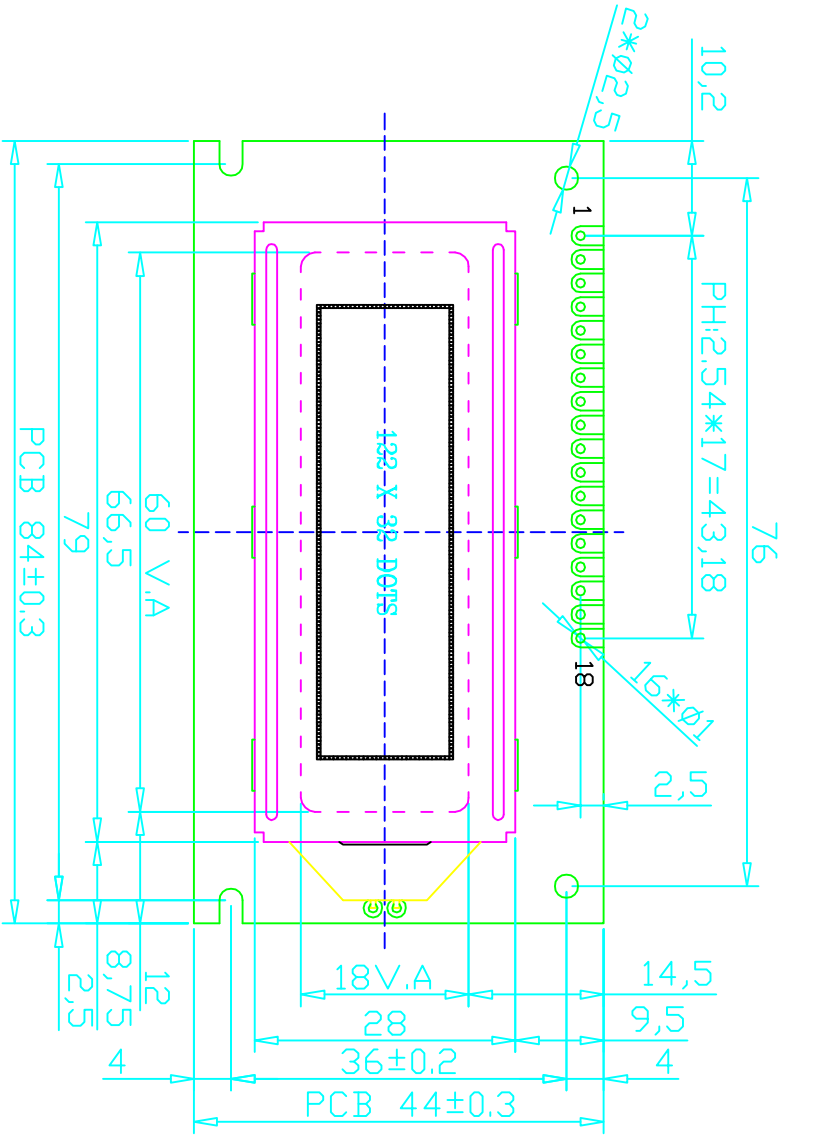

SPECIFICATION:

- 1). STN(BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/32. BIAS: 1/5. VOP=5. 0V
- 3). VIEWING ANGLE: 6 0°CLOCK
- 4). OPERATING TEMPERATURE: -10~60°C  
STORAGE TEMPERATURE: -20~70°C
- 5). BACKLIGHT: WHITE I=20MA
- 6). DRIVE IC: SED1520
- 7). DRIVE POWER: VDD=5. 0V

深圳市金彩科技有限公司

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/7/23	LCM12232B	1 OF 1	
CHECKED BY:					
CUSTOM NO.:					
DO NOT SCALE THIS DRAWING.					
PROJECTION			DATE:	2011/7/23	

VER	DETAIL DISCRPTION	DATE
00	FIRST ISSUE	2011-7-23