



INTERFACE:			
J1(井口)	J2(串口)		
1 VSS	17 VSS		
2 VDD(5V)	18 VDD(5V)		
3 VO	19 V0		
4 RS	20 SCLK		
5 /RW	21 SID		
6 E	22 CS		
7 DB0	23 LED-A(5V)		
8 DB1	24 LED-K		
9 DB2			
10 DB3			
11 DB4			
12 DB5			
13 DB6			
14 DB7			
15 LED-A(5V)			
16 LED-K			

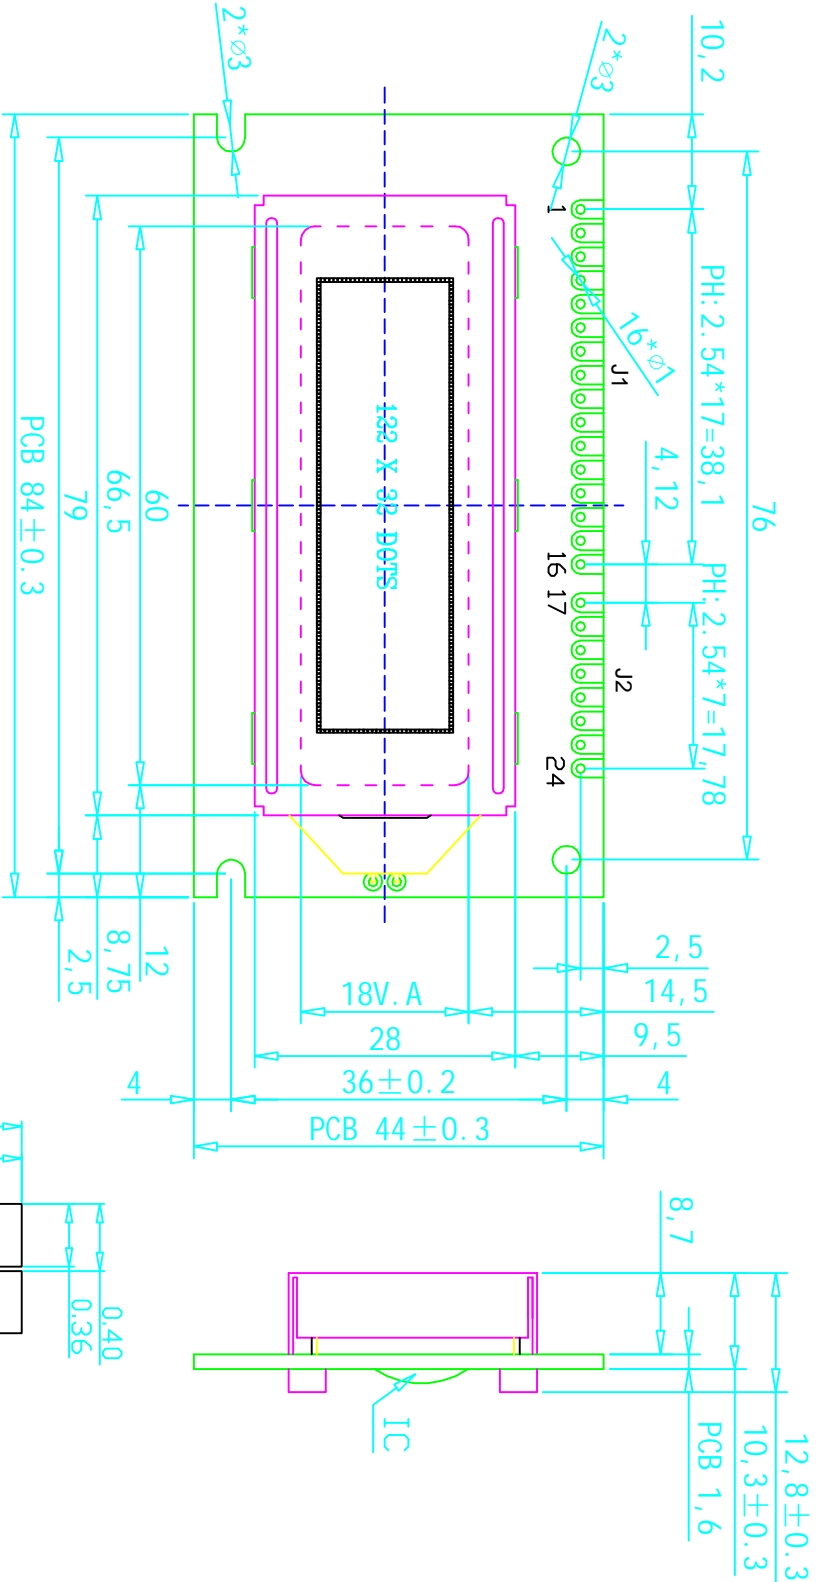

SPECIFICATION:

- 1). STN(BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/32. BIAS: 1/5. VOP=4. 8V
- 3). VIEWING ANGLE: 6 0°CLOCK
- 4). OPERATING TEMPERATURE: -10~60°C
STORAGE TEMPERATURE: -20~70°C
- 5). BACKLIGHT: WHITE I=20MA
- 6). DRIVE IC: ST7920
- 7). DRIVE POWER: VDD=5. 0V

深圳市金彩科技有限公司

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/7/29	LCM12232F	PROJECTION:	1 OF 1
CHECKED BY:					DATE:
CUSTOM NO.:					2011/7/29

DO NOT SCALE THIS DRAWING.

VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2011-7-29