


INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RAW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	RST
17	CS2
18	CS3
19	VOUT
20	LED-A(5V)

SPECIFICATION:

- 1). STN(BLUE)/NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/64. BIAS: 1/9. VOP=10.5V
- 3). VIEWING ANGLE: 60°CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=80MA

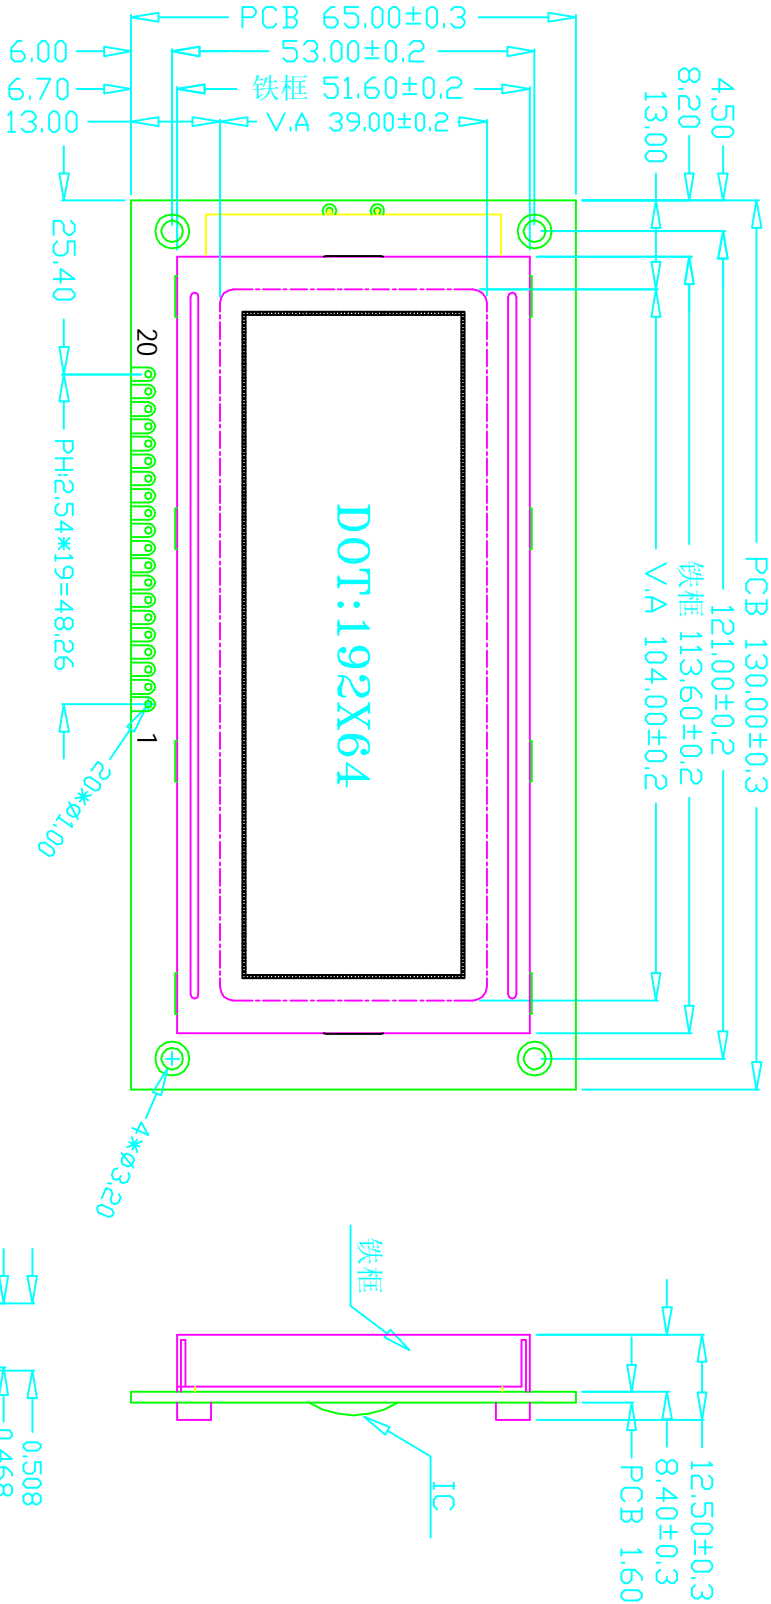

VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2011-06-29

深圳市金彩科技有限公司

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/6/29	LCM19264A	1 OF 1	
CHECKED BY:					
CUSTOM NO.:					
DO NOT SCALE THIS DRAWING.					
			PROJECTION	DATE:	2011/6/29