
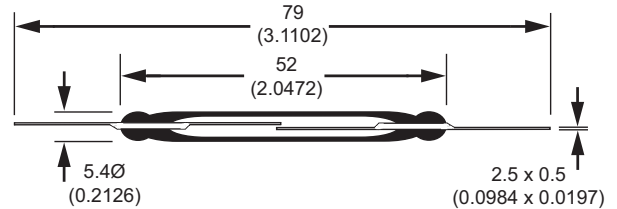


Part Number : GC1523
Reed Switch - Standard - Normally Open Contacts
Product Data Sheet

PICTURE **DIMENSIONS**

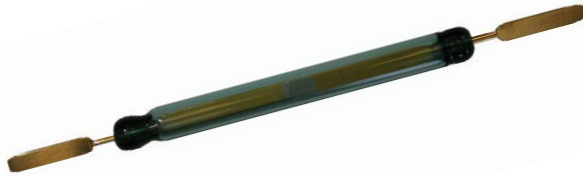

File Number E103299

RoHS Compliant

Drawings not to scale
 All dimensions in mm (inches) nominal.

SPECIFICATION

Contact Form		A (Normally Open)
Contact Material		Rhodium
Switching Capacity	Max.	120 VA
Switching Voltage	Max.	250 VAC/DC
Switching Current	Max.	3.0 A
Carrying Current	Max.	5.0 A
Dielectric Strength	Min.	800 VDC
Contact Resistance	Max.	80 mOhms
Insulation Resistance	Min.	10 ¹¹ Ohms
Pull - In - Sensitivity		75 - 95 AT
Drop - Out - Sensitivity	Min.	30 AT
Operate Time Without Bounce	Max.	3.5 ms
Bounce Time	Max.	0.5 ms
Release Time	Max.	0.20 ms
Resonant Frequency	Typ.	900 Hz
Operating Frequency	Max.	100 Hz
Vibration (10-1000Hz)		35 g
Shock (11 ms)		50 g
Capacitance	Typ.	0.8 pF
Operating Temperature Range	Deg.	-40°C + 125°C
Test Coil	Type	1500

ORDERING INFORMATION **NOTES**

PART NUMBER GC 1523 75 95

- Type _____
- Minimum Sensitivity (AT) _____
- Maximum Sensitivity (AT) _____

Example: Type GC1523 Standart Sensitivity. Pull-in sensitivity between 75 - 95AT is PART NO: GC 1523 75 95.
 Available in ranges of 5 AT e.g: 75-80, 80-85, etc.

- When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm (.118in.) to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.
- We offer a crop and form service for Reed Switches to be customized to your specification.

REV. NO.	REVISION NOTE	DATE	SIGNATURE
2	Datasheet Redesign	23-05-07	LG

TAKE A LOOK AT OUR VARIETY OF PRODUCTS



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.