


Female Header
Single Row/ Dual Row
Straight DIP type

Pitch: 1.27mm

Series
232 /233
234 /235

sgdconn

Http://www.sgdconn.com





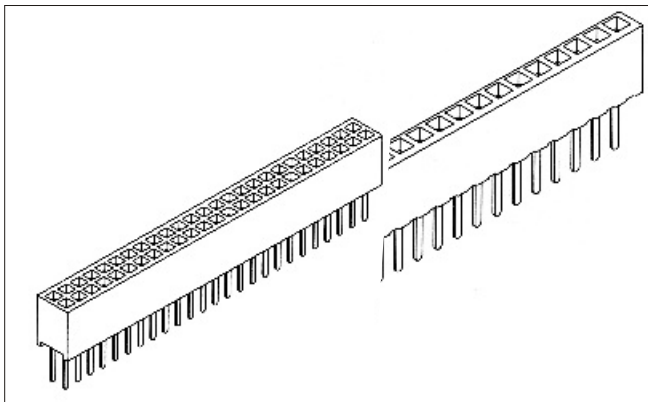


SPECIFICATIONS:


Current Rating: 1.0 AMP
Contact Resistance: 30m• Max
Insulation Resistance: 1000M• Min
Withstand Voltage: 300VAC/minute
Operation Temperature: -40°C to +105°C

MATERIALS:

Contact Material: Copper Alloy
Contact Plating: Gold or Tin over 50μ " Ni
Insulator Material: Polyester(UL94V-0)
Standard: PA 46

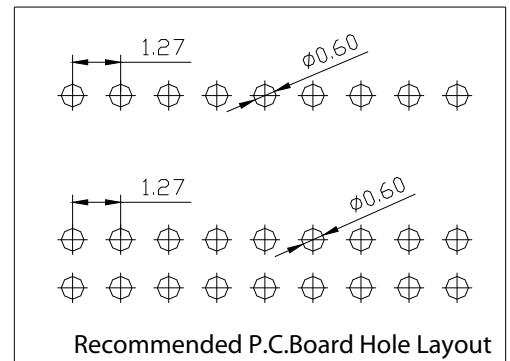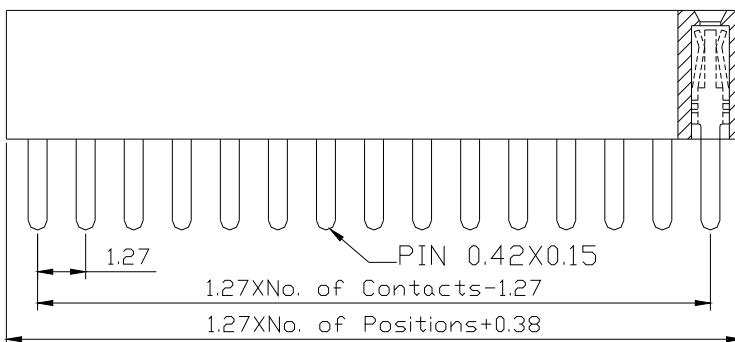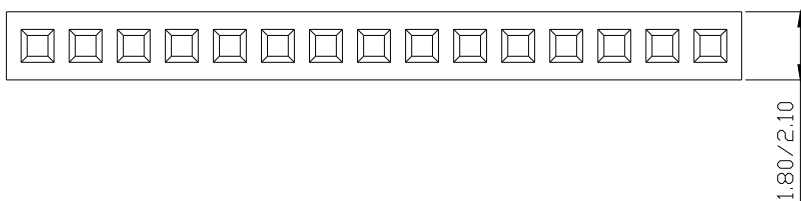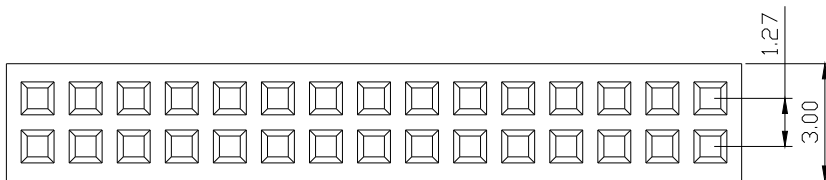

H = 2.0mm
H = 3.4mm



H = 4.3mm
H = 4.4mm

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
2 3 X X XX S X X 1 0

- | | | | | | | | | |
|-----------------------------------|--|--|---|--|---|--|-----------------|--------------------|
| ① Series No.:
2= Female Header | ③ Insulator Height:
2 = 2.0mm
3 = 3.4mm
4 = 4.3mm
5 = 4.4mm
6 = 4.6mm | ④ Dip Spacing:
1=Single row
2=Double row | ⑤ Number of Contacts:
Single row ① to 40
Double row=02 t④ | ⑥ Tail& Mounting Style:
S=Straight DIP type | ⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u" | ⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46 | ⑨ Color:1=Black | ⑩ Customer Request |
|-----------------------------------|--|--|---|--|---|--|-----------------|--------------------|

Due to technicprogress, all the information provided subject to change without prior notice.