# HS161-1 16 chracters x 1

## 1.DIMENSION OUTLINE

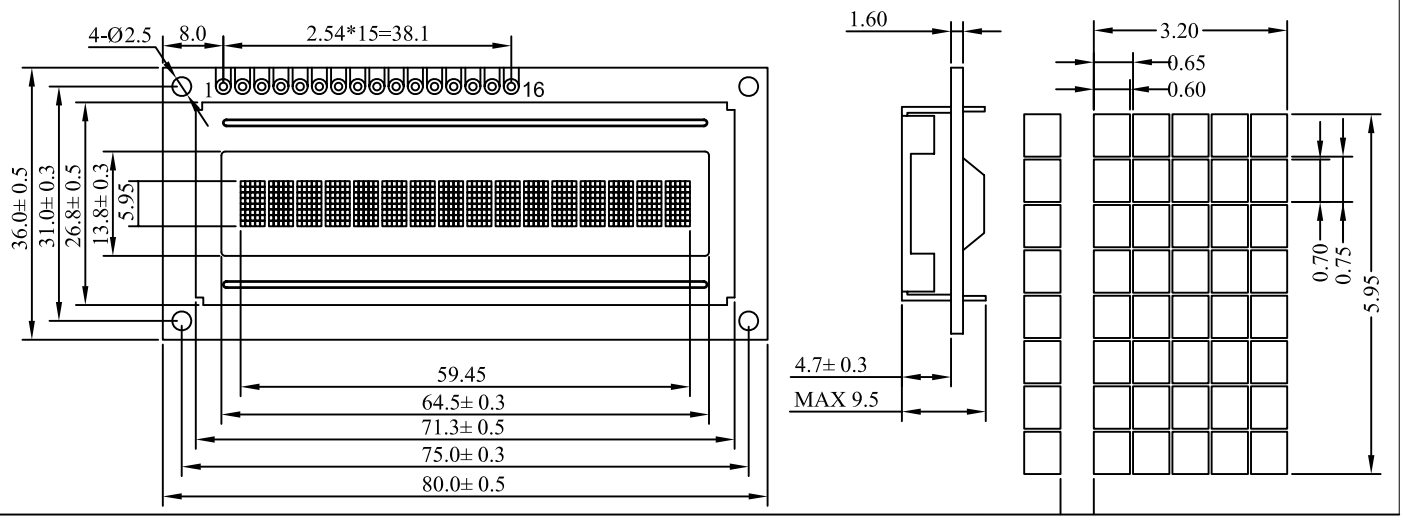


## 2.MECHANICAL SPECIFICATIONS

| ITEM | SPECIFICATIONS | ITEM | REMARK |
|---|---|---|---|
| Modeule Size(L×W×H) | 80.0×36.0×9.5 | mm | Reference Dimensional Outline |
| View Area(W×H) | 64.6×16.0 | mm | |
| Effective V/Area | 59.45×5.95 | mm | |
| Number of Characters | 16CH×1Line | — | |
| Character Size(WxH) | 3.20×5.95 | mm | |
| Dot Size(W×H) | 0.60×0.70 | mm | |
| Weight(Reflective/Led) | — | g | |

## 3.ABSOLUTE MAXIMUM RATINGS

| ITEM | SYMBOL | CONDITION | STANDARD | |
|---|---|---|---|---|
| | | | MIN | MAX |
| Logic Voltage | $V_{DD}$ | Ta=25℃ | -0.3V | 7V |
| LCD Voltage | $V_{LCD}$ | | -0.3V | 13V |
| Input Voltage | $V_I$ | | -0.3V | $V_{DD}$+0.3V |
| Operation Temperature | $T_{OP}$ | — | -20℃ | 70℃ |
| Storage Temperature | $V_{OP}$ | — | -30℃ | 80℃ |

## 4.BLOCK DIAGRAMMECHANICAL

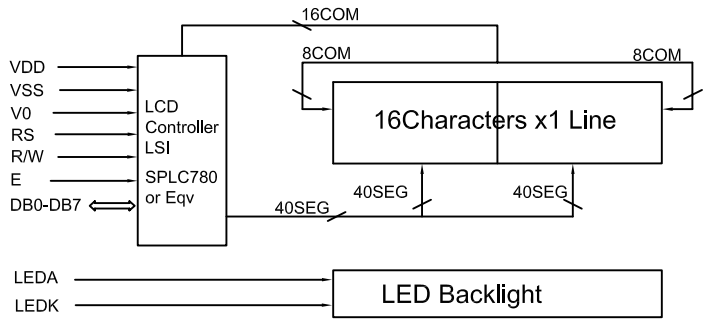


## 5.LED BACKLIGHT SPECIFICATIONS

| ITEM | SYMBOL | TYPE | MAX | UNIT |
|---|---|---|---|---|
| Ta=25℃ | | | | |
| Forward Voltage | $V_f$ | 4.1 | 4.3 | V |
| Forward Current | $I_f$ | 110 | — | mA |
| Emission Vave Length | $\lambda_P$ | 568 | — | nm |

## 6.INTERFACE PIN CONNECTIONS

| ITEM | SYMBOL | LEVEL | FUNCTIONS |
|---|---|---|---|
| 1 | VSS | — | Power Supply For Logic |
| 2 | VDD | — | Power Ground |
| 3 | V0 | — | Contrast adjust |
| 4 | RS | H/L | H:data L:command |
| 5 | R/W | H/L | H:read L:write |
| 6 | E | H. H→L | Enable singnal |
| 7-14 | DB0-DB7 | H/L | Data Bus |
| 15 | LEDA | +5V | Power supply For LED Backlight |
| 16 | LEDK | 0V | |

## 7.ELECTRICAL CHARACTERISTICS

| ITEM | SYMBOL | MIN | TYPE | MAX | UNIT |
|---|---|---|---|---|---|
| Ta=25℃ | | | | | |
| Logic Power | $V_{DD}$ | 4.5 | 5 | 5.5 | V |
| Input High Voltage | $V_{IH}$ | 2.2 | — | $V_{DD}$ | V |
| Input Low Voltage | $V_{IL}$ | -0.3 | — | 0.8 | V |
| Output High Voltage | $V_{OH}$ | 2.4 | — | $V_{DD}$ | V |
| Output Low Voltage | $V_{OL}$ | 0 | — | 0.4 | V |
| Logic Current | $I_{DD}$ | — | 1.2 | 3.0 | mA |
| Operation Voltage For LCD | $V_{DD}$-$V_O$ | — | 4.6 | — | V |
| | | | | | |