


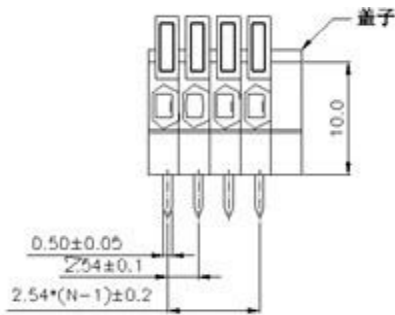


材质及电镀		MATERIAL	
间距	2.54mm	Pitch	2.54mm
极数	1p-24p	Poles	1p-24p
塑件	PA66.UL94V-0	Housing	PA66.UL94V-0
触点材料	不锈钢	Contact	Stainless Steel
焊针	黄铜、镀锡	Pin header	Brass、Tin plated
电气性能		ELECTRICAL	
额定电压	150V	Rated voltage	150V
额定电流	2A	Rated current	2A
耐电压	AC1500V/Min	Withstanding voltage	AC1500V/Min
使用线径	26-20A WG	Wire range	24-20A WG
机械性能		MECHANICAL	
温度范围	-40°C to +125°C	Temperature range	-40°C to +125°C
瞬间温度	+250°C5秒	MAX soldering	+250°C5 secatgry
剥线长度	11mm	Strip length	11mm



除去盖子的视图



宁波森昱电子有限公司
GX141R-2.54 PDF资料