

材质及电镀

间距 8.25mm
 极数 2p-26p
 塑件 PA66.UL94V-0
 螺丝 M3、钢、镀镍
 端子 黄铜、镀锡

MATERIAL


Pitch 8.25mm
 Poles 2p-26p
 Housing PA66.UL94V-0
 Screw M3、Steel、Ni plated
 Terminal Brass、Tin plated

性能



额定电压 300V
 额定电流 20A
 耐电压 AC2000V/1Min
 使用线径 22-14A WG
 温度范围 -40°C to +105°C
 最大锁紧扭力 8kg.cm

CAPABILITY

Rated voltage 300V
 Rated current 20A
 Withstanding voltage AC2000V/1Min
 Wire range 22-14A WG
 Temperature range -40°C to +105°C
 Max.Torque Value 8kg.cm

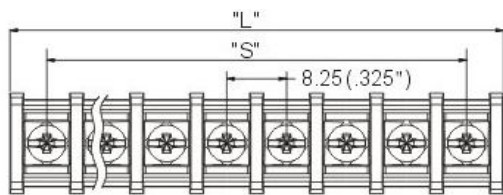

"S"=8.25x(P-1)
 "L"=8.25x(P-1)+10.15

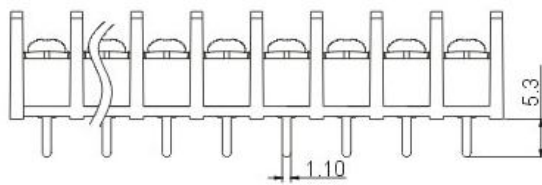

极数	2	3	4	5	6	7	8	9	10
L(mm)	18.40	26.65	34.90	43.15	51.40	59.65	67.90	76.15	84.40
S(mm)	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25
极数	11	12	13	14	15	16	17	18	19
L(mm)	92.65	100.90	109.15	117.40	125.65	133.90	142.15	150.40	158.65
S(mm)	82.50	90.75	99.00	107.25	115.50	123.75	132.00	140.25	148.50
极数	20	21	22	23	24	25	26	27	28
L(mm)	166.90	175.15	183.40	191.65	199.90	208.15	216.40		
S(mm)	156.75	165.00	173.25	181.50	189.75	198.00	206.25		

宁波森昱电子有限公司
 GX35C-8.25PDF资料