

材质及电镀

间距 9.50mm
 极数 2p-26p
 塑件 PA66.UL94V-0
 螺丝 M4、钢、镀镍
 端子 黄铜、镀锡

MATERIAL


Pitch 9.50mm
 Poles 2p-26p
 Housing PA66.UL94V-0
 Screw M4、Steel、Ni plated
 Terminal Brass、Tin plated

性能

额定电压 300V
 额定电流 25A
 耐电压 AC2000V/1Min
 使用线径 22-14A WG
 温度范围 -40°C to +105°C
 最大锁紧扭力 10kg.cm

CAPABILITY

Rated voltage 300V
 Rated current 25A
 Withstanding voltage AC2000V/1Min
 Wire range 22-14A WG
 Temperature range -40°C to +105°C
 Max.Torque Value 10kg.cm

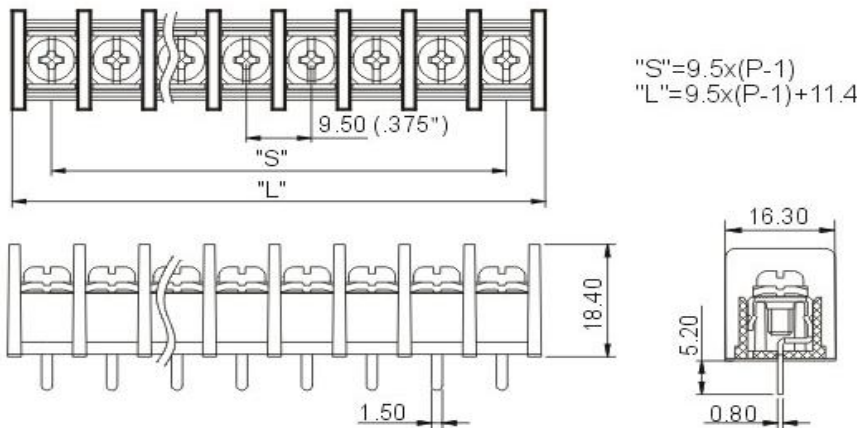

极数	2	3	4	5	6	7	8	9	10
L(mm)	20.90	30.40	39.90	49.40	58.90	68.40	77.90	87.40	96.90
S(mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50
极数	11	12	13	14	15	16	17	18	19
L(mm)	106.40	115.90	125.40	134.90	144.40	153.90	163.40	172.90	182.40
S(mm)	95.00	104.50	114.00	123.50	133.00	142.50	152.00	161.50	171.00
极数	20	21	22	23	24	25	26	27	28
L(mm)	191.90	201.40	210.90	220.40	229.90	239.40	248.90		
S(mm)	180.50	190.00	199.50	209.00	218.50	228.00	237.50		

宁波森昱电子有限公司
 GX45C-9.5PDF资料