
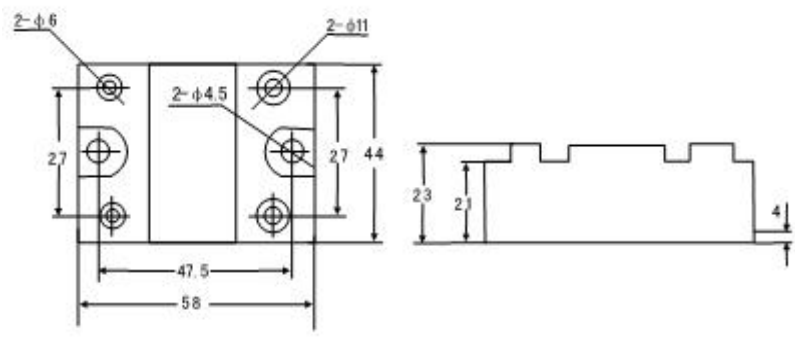
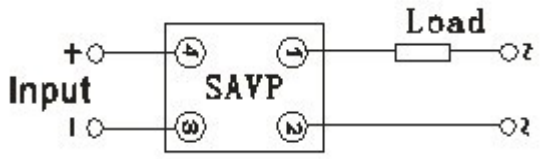
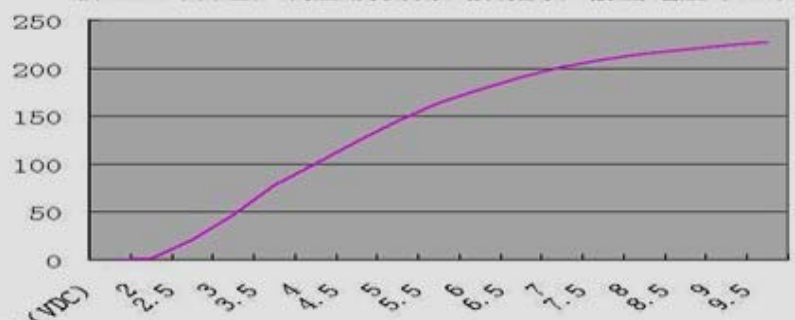


产品型号及外观	SAVP2215	SAVP2225	SAVP2240	SAVP3815	SAVP3825	SAVP3840
	SAVP2260	SAVP2280	SAVP22100	SAVP3860	SAVP3880	SAVP38100
性能指标						
主要技术参数						
负载调压范围	0-250VAC			0-430VAC		
负载最大允许电流	15A、25A、40A、60A、80A、100A					
控制方式	2-10VDC或4-20mA					
隔离电压	$\geq 2000$ VAC					
绝缘电压	$\geq 2000$ VAC					
负载端最小压降	$\geq 2$ VAC					
工作环境温度	- 40 to 80 °C					
外形尺寸						
应用图						
输出曲线图	<p>新SAVP(双硅)调压模块测试数据表 输出电压(VAC)</p> 					

控制电压 (VDC)

22.5

26.5

27.5

32.5

36.5

41.5

46.5

51.5

56.5