

## 连云港济源晶体元件有限公司 (JYJT)

### ELECTRICAL SPECIFICATIONS


Output Frequency Range	12.000 MHz to 50.000 MHz
Mode	see Table 1*
Frequency Tolerance (at 25°C)	±10ppm, ±30ppm or specify
Frequency Stability Over Operating Temperature Characteristics	±10ppm, ±30ppm or specify
Operating Temperature Range	-10 °C to +60 °C
	-20 °C to +70 °C
	-40 °C to +85 °C
Storage Temperature Range	-55 °C to + 125 °C
Shunt Capacitance (C <sub>0</sub> )	5.0 pF Max
Driver Level (Typical)	10μW~100μW
Load Capacitance(C <sub>L</sub> )	Series, 16pF, 20pF, 30pF, 32pF, or specify
Aging @25°C 1 <sup>st</sup> year (Max)	±3ppm/year
Shock Resistance	Drop test of 3 times on 2mm stainless plate from 75cm height

**REMARK:** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. PLEASE CONFIRM WITH OUR SALES ENGINEER.

### EQUIVALENT SERIES RESISTANCE ( ESR) (Table 1)

<u>Frequency Range</u>	<u>E.S.R(Ω)</u>	<u>Mode</u>
12~24MHz	80Ω Max	AT/Fundamental
24~50MHz	60Ω Max	AT/Fundamental

Dimension

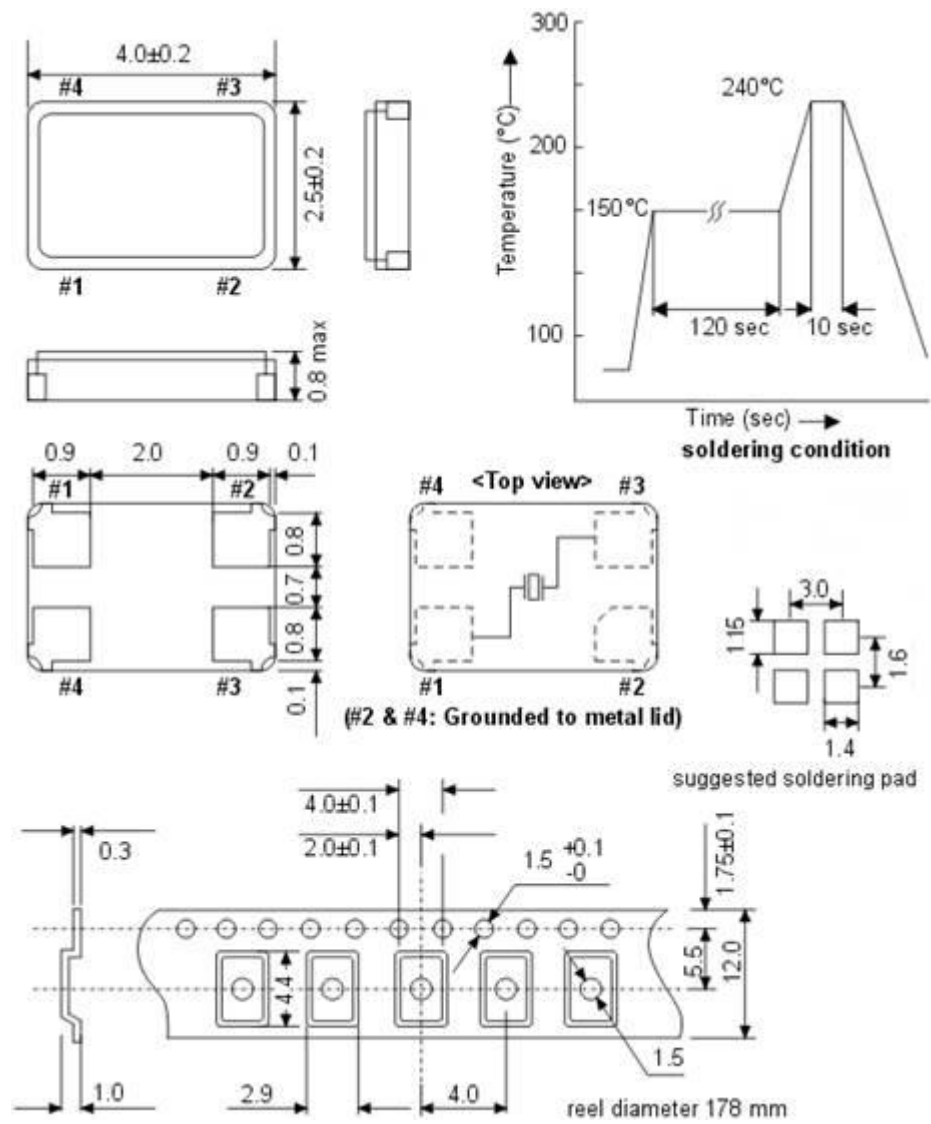

连云港济源晶体元件有限公司 (JYJT)

联系人: 朱侠蓉 电话: 0518-87612002 / 87615384

传真: 0518-87615003 手机: 15062975197 QQ: 923615399

邮箱: [jiyuanjingti@hotmail.com](mailto:jiyuanjingti@hotmail.com)