

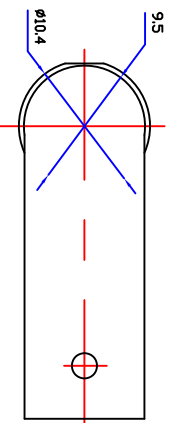

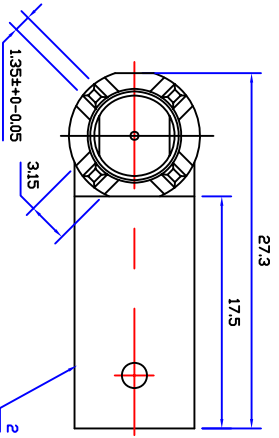
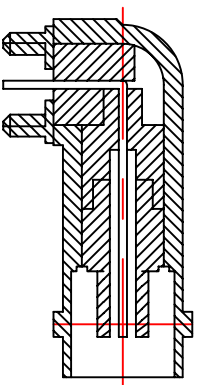




Product NO.		DOSIN-801-0050	
REV	DESCRIPTION	DWN	DATE
A	First Issue	JIM	2012/11/02
			APPROVEN
			John kime

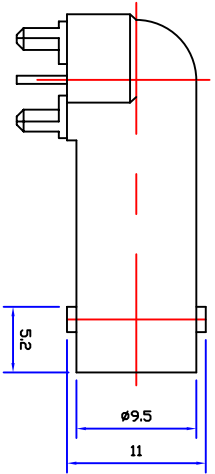

PCB HOLE CONFIGURATION  
RECOMMENDED PANEL CUTOUTS

### Specifications

Impedance: 50 Ohms  
Frequency Range: DC~3G  
VSWR: 1.3MAX  
Working Voltage: 500V rms @ sea level  
Insulation Resistance: 5000 Ohms min  
Temperature Range: -55°C T0 +155°C  
Relative Temperature: ≤95% (40°C ±2°C)  
Drawings products are in line with ROHS standards

#### NOTE:

DRAWN	2012/11/10	Tolerance	0-6 6-30 30-120 Angular	±0.15 ±0.20 ±0.5 ±2°
CHECKED		View		
UNIT		SCALE	MM	1:1

Name: BNC CONNECTOR DNN

**DOSIN** Dongsin Industrial(H.K)Co.Ltd  
 东莞市德奈五金电子有限公司  
 Dosin Hardware Electronics Co.,Ltd  
 E-mail: dosin2005@163.com  
 dosin2005@dosing-china.com  
 Web: http://www.dosing.com  
 TEL: (0086)769-81153906  
 FAX: (0086)769-81875836

3	BODY	ZINC	NICKEL	1
2	INSULATOR	PDM	WHITE	1
1	PIN	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

6	DRAWN		2012/11/10	
5	CHECKED		Zelin.Zhang	
4	APPROVALS	DATE	SCALE	
3	John Kime	19/04/2012	1:1	

6	SIZE	Product NO.	DOSIN-801-0050	REV	B
5	Date/Time	CAD FILE	DOSIN-801-0050	SHEET:	1 OF 1
4	2012/11/02	D/company drawings/BD			