

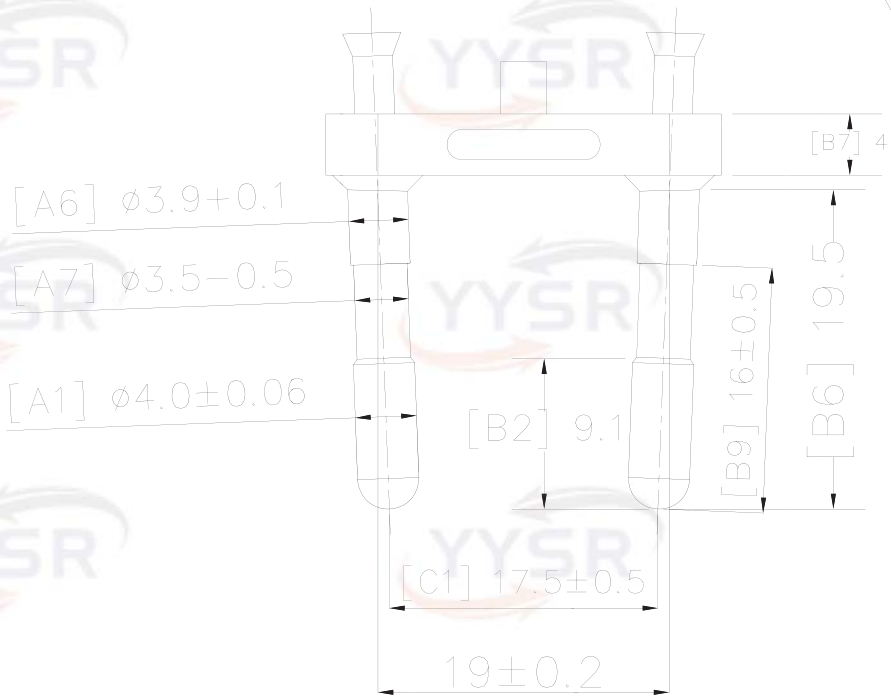




Y910-S

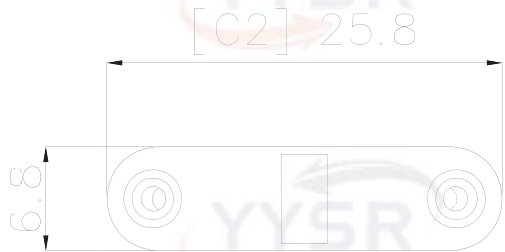

3		Material	PBT+30%GF, black/white	----
2				
1	4031HA.1	L/N Pin	H62~65 &=0.4 Plated Nickel	2pc
No.	Part No.	Part Name	Description	Qty.

**Note:**  
 1. Material of insulation: PBT+30%GF (Black/White)  
 2. Material of pins: H62~65 brass  
 Earth contact: H62~65 brass  
 3. Finish: Plated Nickel (1.2um Min.)  
 4. The pins are not turn when a torque of 0.4N.M is applied in both clockwise & anticlockwise direction.  
 5. Voltage Proof: 2000V/1min 0.5mA without failure.  
 6. without indentation, damage

**注:**  
 1. 原材料—塑料: 高阻燃 PBT 塑料 (黑色/白色)  
 2. 铜材: H62~65 有磷铜材 3. 表层: 镀镍 (薄小厚度 1.2um)  
 4. 扭力: 大于或等于 0.4N.M 5. 耐压: 2000V 1min 不击穿  
 6. 外观无明显缺陷

 <b>Tolerance:</b> Unit mm x. ± 0.20mm ±3' x.x ± 0.10mm x.xx ± 0.05mm x.xxx ± 0.02mm 重量: 比例:	By	戎南松	C:\Users\TINA\Desktop\log2.png 寅升电子
	Date	03/15-2013	
	Check	周娇娇	工程图纸
	App		Engineering Drawing
Material:	N/A	Model	YS-016
		产品名称	欧洲头
		版本号	
		Page 1	A