
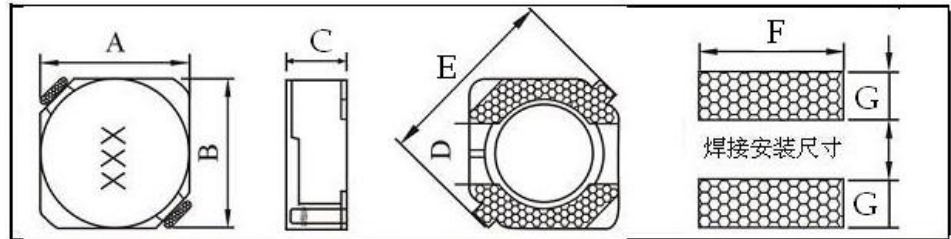


# Anruike 安瑞科 / SMD POWER INDUCTORS CD3D16 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (max)	B(±0.3)	C (max)	D	E	F	G	载带盘装
CD3D16	4.0	4.0	1.8	1.5	5.5	4.2	1.5	3000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD3D16-1R5M	1.5	±20	100KHz/0.25V	0.05	2.00
CD3D16-2R2M	2.2	±20	100KHz/0.25V	0.07	1.95
CD3D16-3R3M	3.3	±20	100KHz/0.25V	0.08	1.80
CD3D16-4R7M	4.7	±20	100KHz/0.25V	0.10	1.50
CD3D16-6R8M	6.8	±20	100KHz/0.25V	0.17	1.33
CD3D16-100M	10	±20	100KHz/0.25V	0.23	1.20
CD3D16-120M	12	±20	100KHz/0.25V	0.26	1.15
CD3D16150M	15	±20	100KHz/0.25V	0.29	1.00
CD3D16-180M	18	±20	100KHz/0.25V	0.35	0.91
CD3D16-220M	22	±20	100KHz/0.25V	0.48	0.85
CD3D16-270M	27	±20	100KHz/0.25V	0.54	0.72
CD3D16-330M	33	±20	100KHz/0.25V	0.67	0.62
CD3D16-390M	39	±20	100KHz/0.25V	0.69	0.58
CD3D16-470M	47	±20	100KHz/0.25V	1.10	0.55
CD3D16-560M	56	±20	100KHz/0.25V	1.25	0.50
CD3D16-680M	68	±20	100KHz/0.25V	0.76	0.45
CD3D16-820M	82	±20	100KHz/0.25V	0.79	0.40
CD3D16-101M	100	±20	100KHz/0.25V	0.82	0.38
CD3D16-121M	120	±20	100KHz/0.25V	0.86	0.36
CD3D16-151M	150	±20	100KHz/0.25V	0.90	0.34
CD3D16-181M	180	±20	100KHz/0.25V	0.95	0.30

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818