


Anruike 安瑞科 / SMD POWER INDUCTORS CD4D18 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

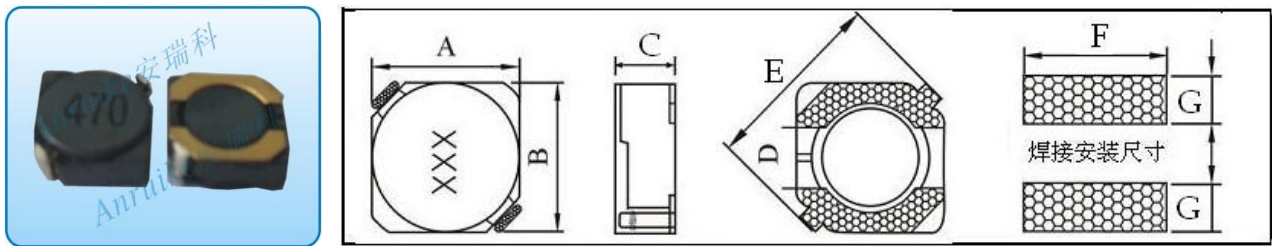

产品型号	A (max)	B (±0.3)	C (max)	D	E	F	G	载带盘装
CD4D18	5.0	5.0	2.0	1.5	6.9	5.3	1.9	3000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD4D18-1R0M	1.0	±20	100KHz/0.25V	0.024	2.72
CD4D18-2R2M	2.2	±20	100KHz/0.25V	0.037	2.32
CD4D18-3R3M	3.3	±20	100KHz/0.25V	0.051	1.94
CD4D18-3R9M	3.9	±20	100KHz/0.25V	0.060	1.74
CD4D18-4R7M	4.7	±20	100KHz/0.25V	0.069	1.50
CD4D18-5R6M	5.6	±20	100KHz/0.25V	0.170	1.43
CD4D18-6R8M	6.8	±20	100KHz/0.25V	0.150	1.36
CD4D18-8R2M	8.2	±20	100KHz/0.25V	0.160	1.28
CD4D18-100M	10	±20	100KHz/0.25V	0.168	0.95
CD4D18-120M	12	±20	100KHz/0.25V	0.19	0.93
CD4D18-150M	15	±20	100KHz/0.25V	0.20	0.90
CD4D18-180M	18	±20	100KHz/0.25V	0.23	0.88
CD4D18-220M	22	±20	100KHz/0.25V	0.29	0.81
CD4D18-270M	27	±20	100KHz/0.25V	0.34	0.75
CD4D18-330M	33	±20	100KHz/0.25V	0.47	0.72
CD4D18-390M	39	±20	100KHz/0.25V	0.54	0.60
CD4D18-470M	47	±20	100KHz/0.25V	0.60	0.53
CD4D18-560M	56	±20	100KHz/0.25V	0.84	0.46
CD4D18-680M	68	±20	100KHz/0.25V	0.96	0.40
CD4D18-820M	82	±20	100KHz/0.25V	1.20	0.35

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818