
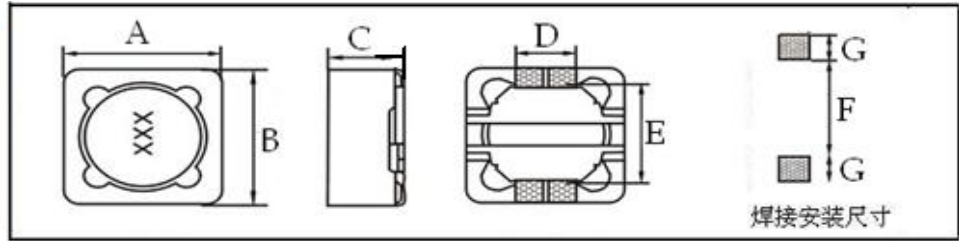


Anruike 安瑞科 / SMD POWER INDUCTORS CDRH127 SERIES

外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A±0.3	B±0.3	C (MAX)	D	E	F	G	载带盘装
CDRH127	12.0	12.0	8.0	5.0	7.6	7.0	2.9	500PCS/R

电气性能 Electrical properties

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDRH127-100M	10	±20	100KHz/0.25V	0.019	7.00
CDRH127-120M	12	±20	100KHz/0.25V	0.025	6.80
CDRH127-150M	15	±20	100KHz/0.25V	0.027	6.50
CDRH127-180M	18	±20	100KHz/0.25V	0.039	5.90
CDRH127-220M	22	±20	100KHz/0.25V	0.043	5.60
CDRH127-270M	27	±20	100KHz/0.25V	0.046	5.40
CDRH127-330M	33	±20	100KHz/0.25V	0.053	5.00
CDRH127-390M	39	±20	100KHz/0.25V	0.073	5.65
CDRH127-470M	47	±20	100KHz/0.25V	0.076	5.50
CDRH127-560M	56	±20	100KHz/0.25V	0.089	4.60
CDRH127-680M	68	±20	100KHz/0.25V	0.110	4.40
CDRH127-820M	82	±20	100KHz/0.25V	0.130	3.80
CDRH127-101M	100	±20	100KHz/0.25V	0.150	3.50
CDRH127-121M	120	±20	100KHz/0.25V	0.155	2.60
CDRH127-151M	150	±20	100KHz/0.25V	0.180	2.42
CDRH127-181M	180	±20	100KHz/0.25V	0.200	2.30
CDRH127-221M	220	±20	100KHz/0.25V	0.220	1.80
CDRH127-271M	270	±20	100KHz/0.25V	0.560	1.56
CDRH127-331M	330	±20	100KHz/0.25V	0.640	1.35
CDRH127-391M	390	±20	100KHz/0.25V	0.700	1.10
CDRH127-471M	470	±20	100KHz/0.25V	0.980	1.00
CDRH127-561M	560	±20	100KHz/0.25V	1.070	0.88
CDRH127-681M	680	±20	100KHz/0.25V	1.460	0.75
CDRH127-821M	820	±20	100KHz/0.25V	1.623	0.70
CDRH127-102M	1000	±20	100KHz/0.25V	1.820	0.65

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商 Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818