
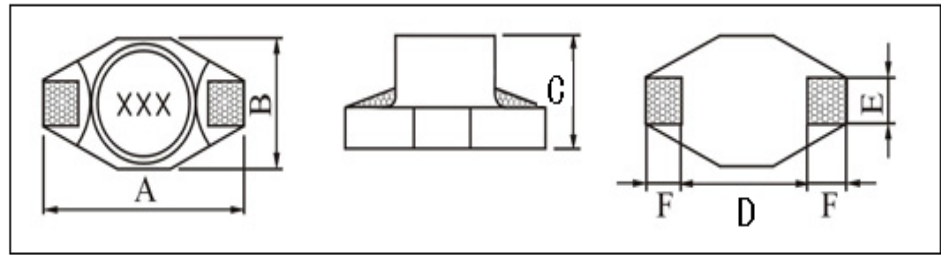


Anruike 安瑞科 / SMD POWER INDUCTORS CDC3316 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (max)	B (max)	C (max)	D	E	F	载带盘装
CDC3316	12.95	9.40	5.08	7.62	2.54	2.54	1000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDC3316-1R0M	1.0	±20	100KHz/0.25V	0.02	5.60
CDC3316-1R5M	1.5	±20	100KHz/0.25V	0.02	5.20
CDC3316-2R2M	2.2	±20	100KHz/0.25V	0.03	5.00
CDC3316-3R3M	3.3	±20	100KHz/0.25V	0.03	3.90
CDC3316-4R7M	4.7	±20	100KHz/0.25V	0.05	3.20
CDC3316-6R8M	6.8	±20	100KHz/0.25V	0.07	2.80
CDC3316-100M	10	±20	100KHz/0.25V	0.10	2.40
CDC3316-150M	15	±20	100KHz/0.25V	0.10	2.00
CDC3316-220M	22	±20	100KHz/0.25V	0.20	1.60
CDC3316-330M	33	±20	100KHz/0.25V	0.33	1.40
CDC3316-470M	47	±20	100KHz/0.25V	0.36	1.00
CDC3316-101M	100	±20	100KHz/0.25V	1.32	0.74
CDC3316-151M	150	±20	100KHz/0.25V	1.65	0.70
CDC3316-181M	180	±20	100KHz/0.25V	1.79	0.62
CDC3316-221M	220	±20	100KHz/0.25V	2.00	0.58
CDC3316-271M	270	±20	100KHz/0.25V	2.16	0.52
CDC3316-331M	330	±20	100KHz/0.25V	2.78	0.43
CDC3316-471M	470	±20	100KHz/0.25V	3.00	0.40
CDC3316-681M	680	±20	100KHz/0.25V	3.21	0.35
CDC3316-102M	1000	±20	100KHz/0.25V	3.65	0.32
CDC3316-152M	1500	±20	100KHz/0.25V	3.80	0.30
CDC3316-222M	2200	±20	100KHz/0.25V	4.10	0.28
CDC3316-332M	3300	±20	100KHz/0.25V	4.29	0.26
CDC3316-472M	4700	±20	100KHz/0.25V	4.90	0.24
CDC3316-682M	6800	±20	100KHz/0.25V	5.30	0.20
CDC3316-103M	10000	±20	100KHz/0.25V	6.00	0.15

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818