




版本 REV	更改描述 (标记)	REPLACE MARKING	更改日期 REPLACE DATE	签名 SIGNATURE	核准 CHECKED BY

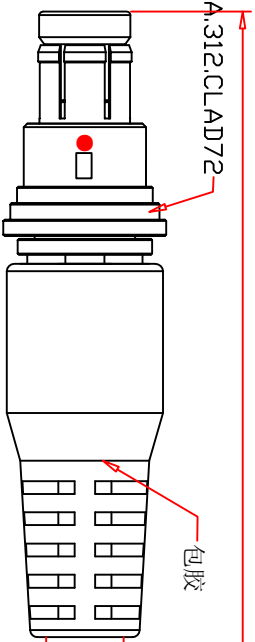

8000±10

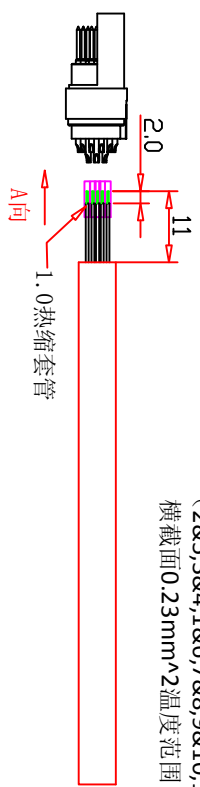

6x2x0.14mm² 屏蔽线, 双芯交合
(285,384,186,788,9810,11812), 电缆外径 7.3mm,
横截面 0.23mm² 温度范围: -10C --80C (+/- 10C)

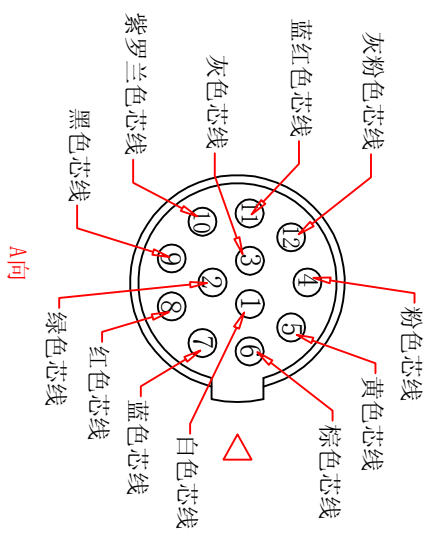

DEG	A	B	C	D	ANGLE	DESIGNED	CHECKED	APPROVED	名称 PART NAME	材料 MATERIAL	重量 QUANTITY	单位 UNIT	比例 SCALE	标记 MARKING
0-5	±0.02	±0.05	±0.10	±0.15	0°-30°	设计	校对	审核	103A 12P 插头焊线示意图			mm		
5-10	±0.05	±0.10	±0.15	±0.20	31°-60°				02-103A		共	页	第	页
10-50	±0.10	±0.15	±0.20	±0.25	61°-90°				DRAWING NO. 103A-ASM-130517-03					REV A/2
50-100	±0.15	±0.20	±0.25											
100-	±0.15%	±0.20%	±0.25%											

