



SATT 系列固定衰减器系列

专利号：ZL201020228848.7

技术指标：

频率：DC-6GHz, DC-12GHz,

DC-18GHz

接口：SMA / N 型

衰减值：1~40dB

衰减误差：见附表

最大输入功率：2W / 5W


最大驻波比：1.3

使用温度：-20~+115℃




尺寸 (mm)：

SMA：

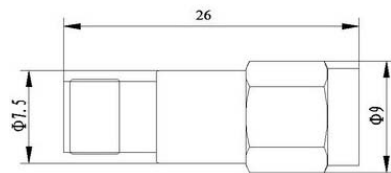

N：

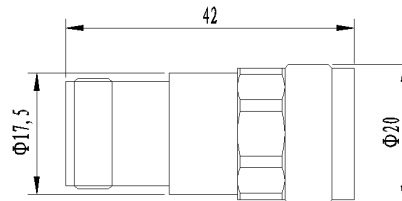

Model Number	Frequency Range (MHz)		Attenuation (dB)					VSWR (:1)				Power (W)	Size
			Nom	tolerance(±dB)				DC-3000	DC-6000	DC-12000	DC-18000		
				DC-3000	DC-6000	DC-12000	DC-18000						
SATT**01-S	DC	6000	1	0.3	0.8	-	-	1.2	1.5	-	-	2	φ7.5*21.5
SATT**02-S	DC	6000	2	0.3	0.5	-	-	1.2	1.5	-	-	2	φ7.5*21.5
SATT**03-S	DC	8000	3	0.5	0.5	0.8	-	1.2	1.5	1.5	-	2	φ7.5*21.5
SATT**05-S	DC	12000	5	0.5	0.5	0.8	-	1.2	1.3	1.5	-	2	φ7.5*21.5
SATT**06-S	DC	12000	6	0.5	0.5	0.8	-	1.2	1.3	1.5	-	2	φ7.5*21.5
SATT**10-S	DC	12000	10	0.5	0.5	0.7	-	1.2	1.3	1.3	-	2	φ7.5*21.5
SATT**15-S	DC	12000	15	0.5	0.5	0.7	-	1.2	1.3	1.3	-	2	φ7.5*21.5
SATT**20-S	DC	12000	20	0.5	0.5	0.7	-	1.2	1.3	1.3	-	2	φ7.5*21.5
SATT**30-S	DC	12000	30	0.5	0.7	-	-	1.2	1.3	-	-	2	φ7.5*21.5
SATT**40-S	DC	12000	40	0.8	1	-	-	1.2	1.3	-	-	2	φ7.5*21.5
SATT**01-N	DC	6000	1	0.3	0.8	-	-	1.2	1.5	-	-	5	φ17.5*42
SATT**02-N	DC	6000	1	0.3	0.5	-	-	1.2	1.5	-	-	5	φ17.5*42
SATT**03-N	DC	8000	3	0.5	0.5	0.8	-	1.2	1.3	1.5	-	5	φ17.5*42
SATT**05-N	DC	12000	5	0.5	0.5	0.8	-	1.2	1.3	1.5	-	5	φ17.5*42
SATT**06-N	DC	12000	6	0.5	0.5	0.8	-	1.2	1.3	1.3	-	5	φ17.5*42
SATT**10-N	DC	12000	10	0.5	0.5	0.7	-	1.2	1.3	1.3	-	5	φ17.5*42
SATT**15-N	DC	12000	15	0.5	0.5	0.7	-	1.2	1.3	1.3	-	5	φ17.5*42
SATT**20-N	DC	12000	20	0.5	0.5	0.7	-	1.2	1.3	1.3	-	5	φ17.5*42
SATT**30-N	DC	12000	30	0.5	0.5	-	-	1.2	1.3	-	-	5	φ17.5*42
SATT**40-N	DC	12000	40	0.8	1	-	-	1.2	1.3	-	-	5	φ17.5*42

深圳市塞美联合通信技术有限公司

销售部地址：深圳市福田区滨河大道 3193 号

电话：+86-13823314641 / 传真：0755-61605272

Email：sales@semiunited.com QQ：50605348

© 版权所有