


PC Board Layout


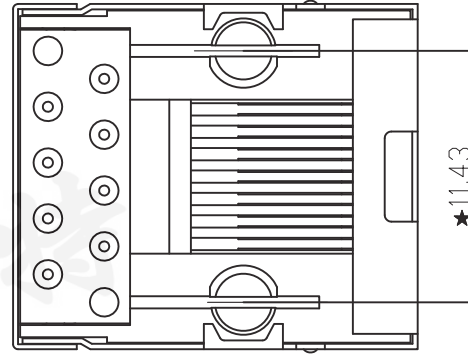


PCB JACK Specification

1. Insulation Resistance: 500M Ω MIN @ 500 VDC
2. Withstanding Voltage: AC1000V 50Hz or 60Hz 1min.
3. Durability: 600 Mating Circles MIN.
4. Gold Plating: (3;6;15;30;50)u inch

Remark:

1. Tolerances Unless Otherwise Specified
 .0±0.25 .00±0.20 .000±0.10
2. The mark with ★ is the key inspection dimension for QC

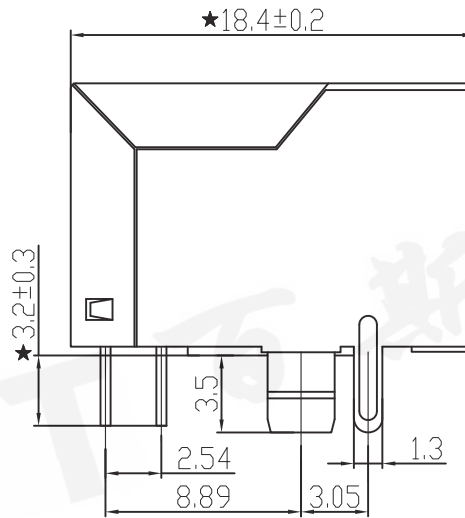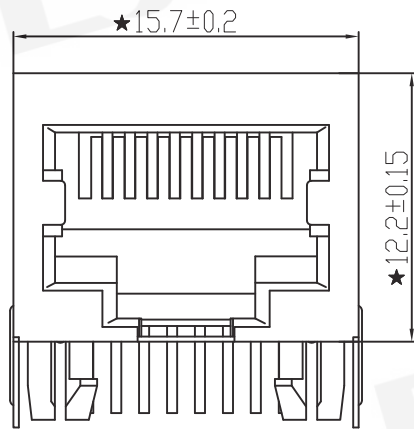

			9					品名 ARTICLE	按键开关	未注公差 TOLERANCE	
			8					型号 MODEL	5622S 10P8C1*1	UP TO 10	±0.20
			7					料号 PART NO.	614D系列	10~50	±0.30
			6					单位 UNIT	mm	50~100	±0.50
			5					比例 SCALE	4:1	ANGLE	±3°
			4					制图 DRAW	审核 CHECK	批准 APPRO.	PROJECTION 视图方法
			3					徐克礼	蒙张泉	刘坚雄	
			2					深圳市百斯特电子有限公司 SHENZHEN BEST ELECTRONICS CO., LTD.			
更新标记 REVISION NOTE	承认 APPRO.	日期 DATE	1								
			NO.	PART NAME	MATERIAL	QTY	REMARK				