

4x4 Diversity ISDB-T Full-Seg TV Tuner

Product Introduction

1. Features


- ISDB-T Full-Seg (Japan)
- New and High-Performance Tuner
- Stable Mobile RX Sensitivity with Four(4)-Tuner and Four(4)-Antenna Diversity
- Auto-Change of ISDB-T Full-Seg and One-Seg
- Quick Search Function
- Easy-to-Install on Car with Film Antenna

2. Functions

- EPG (Electronic Program Guide)
- Closed Captioning
- Bilingual Broadcast
- Auto & Manual Change of ISDB-T Full-Seg and One-Seg
- Easy Upgrade by USB

3. Applications

- Wide Voltage Intended for Application of Bus and Car

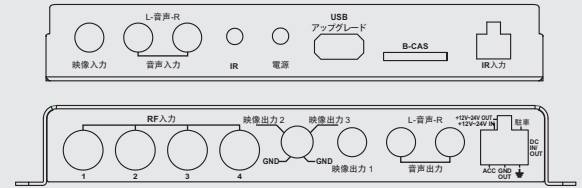

DTR-1316JP



Product Specifications

| Item | Details | | Specifications |
|-------------|-----------------------|----------------|----------------------|
| RF | Frequency Range | | 470 ~ 770MHz |
| | Channel | | 13 ~ 62CH |
| | Sensitivity | | -83 ± 2dBm |
| Interface | Antenna Input | Connector | F Terminal x 4 |
| | | Impedance | 75ohm |
| | B-CAS | | Mini B-CAS |
| | Power Input | Connector | 6 PiNS |
| | | Voltage | 9-28V |
| | USB | | For Software Update |
| | AV Output | Connector | RCA Jack |
| Audio | | Analog Stereo | |
| | | 1Vrms / 47Kohm | |
| Video | NTSC Composite Video | | |
| | 1Vp-p / 75ohm | | |
| Resolution | Video | | 720x480I |
| Temperature | Operating Temperature | | -10℃ ~ 45℃ |
| | Storage Temperature | | -20℃ ~ 80℃ |
| Size | SET | W x H x T | 172mm x 112mm x 24mm |