

SHENZHEN BRILLIANT CRYSTAL TECHNOLOGIC CO.,LTD.

深圳市彩晶科技有限公司

The specification for the following models :

CM12832-5SLYAA-5

PROPOSED BY		APPROVED
Design	Approved	

TEL:+86-755-29995238

FAX:+86-755-29459900

Http://www.cj86.com

E-mail:szcj86@gmail.com

Http://www.szcm-lcd.com


E-mail:szcj86@hotmail.com

地址：深圳市南山区西丽留仙洞工业区顺和达厂区 B 栋

1. Mechanical Specification

ITEM	STANDARD VALUE			UNIT
Dot Matrix	128 X 32 DOTS			--
MODULE DIMENSION	80.6 (W) X 35.0 (H) X 13.0 (T)			mm
VIEWING DISPLAY AREA	60.0 (W) X 18.0 (H)			mm
ACTIVE DISPLAY AREA	48.75 (W) X 14.35 (H)			mm
DOT SIZE	0.36 (W) X 0.41 (H)			mm
DOT PITCH	0.04 (W) X 0.04 (H)			mm
DRIVE METHOD	1/32 Duty , 1/6 BIAS			
VIEWING DIRECTION	6 O'clock			
LED Backlight Color	Yellow Green			
Backlight Input	DC +5.0V	V		mA
LED backlight current	78			mA
Backlight Half-Lift Time	35,000			HR.
INPUT VOLAGE	DC +5.0V	V	1	mA
LCD DRIVER	ST7920			
Weight	35g			

2. Mechanical Diagram

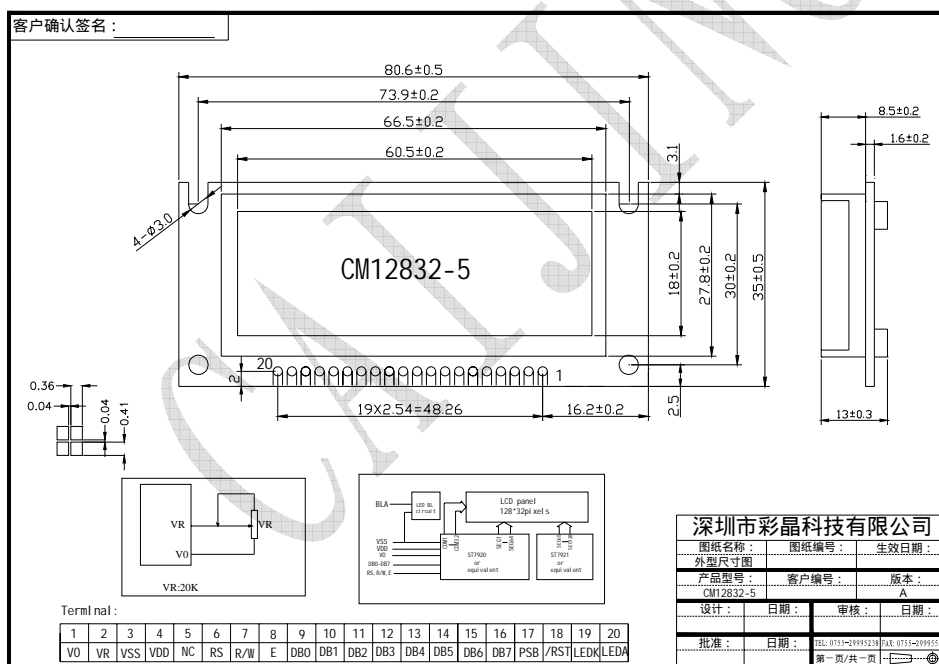

3. Parallel Interface Pin Connections

NO	SYMBOL	LEVEL	FUNCTION
1	V0	--	Supply Voltage For LCD
2	VR	--	Negative Voltage for LCD driver
3	VSS	0	Power Ground
4	VDD	5.0V	Power Supply
5	NC	--	
6	RS	0	H: Data L: Instruction Code
7	R/W	0	H: Read L: Write
8	E	0	Enable Signal
9	DB0	I	DATA BUS
10	DB1	I	DATA BUS
11	DB2	I	DATA BUS
12	DB3	I	DATA BUS
13	DB4	I	DATA BUS
14	DB5	I	DATA BUS
15	DB6	I	DATA BUS
16	DB7	I	DATA BUS
17	PSB	0	H: Parallel Mode
18	RST	0	Reset Signal
19	LEDK	--	LED(0V)
20	LEDA	--	LED(+5V)

4. Serial Interface Pin Connections

NO	SYMBOL	LEVEL	FUNCTION
1	V0	--	Supply Voltage For LCD
2	VR	--	Negative Voltage for LCD driver
3	VSS	0	Power Ground
4	VDD	5.0V	Power Supply
5	NC	--	
6	CS	0	Chip selects signal
7	SID	0	Serial data input
8	SCLK	0	Serial clock input
9	DB0	-	NC
10	DB1	-	NC

11	DB2	-	NC
12	DB3	-	NC
13	DB4	-	NC
14	DB5	-	NC
15	DB6	-	NC
16	DB7	-	NC
17	PSB	0	L: Serial Mode
18	RST	0	Reset Signal
19	LEDK	--	LED(0V)
20	LEDA	--	LED(+5V)

5. Absolute Maximum Ratings

ITEM	SYMBOL	MIN.	TYPE	MAX.	UNIT
OPERATING TEMPERATURE	TOP	0/-20	--	+50/+70	
STORAGE TEMPERATURE	TST	-10/-30	--	+60/+80	
INPUT VOLAGE	VI	4.75	5.0	5.25	V
SUPPLY VOLTAGE FOR LOGIC	VDD-VSS	--	5.0	5.5	V
SUPPLY VOLTAGE FOR LCD	VDD-VO	--	--	5.0	V
STATIC ELECTRICITY	Be sure that you are grounded when handing LCM.				