


NOTES :  
1. Specification:


- 1>.Operating force:1000gMax
- 2>.Operating Temperature: -30° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Mechanical Life: 3000cycles minimum

2. PLATING:  
GOLD FLASH 1u"(min.) SOLDERABLE,  
3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

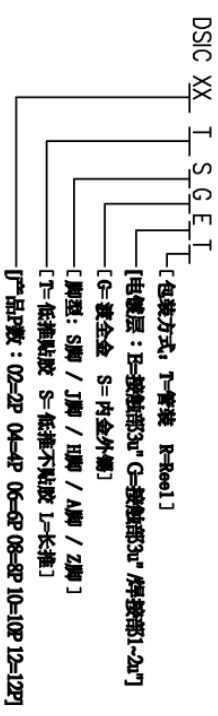

**RECOMMENDED P. C. B. LAYOUT (TOP VIEW)**



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	
LINER	ANGLES	COPY	PROJECTION
.0 ± 0.10	0 ± 1°		
.00 ± 0.05	.0 ± 0.5°		
.000± 0.03	.00±		
DESIGN	ER XIN LU	04/12/12	
DRAWING			
CHECK			
APPRO.			

东莞市广智实业有限公司  
BY DSIC SERIES PITCH 2.54mm  
TYPE HOUSING  
PRODUCT FAMILY DSIC SERIES  
PRAT NO. DSIC02THGET  
FILE NO. DSIC02THGET-A  
SIZE UNIT SCALE SHEET REV.  
A4 mm 2 : 1 10F1 A