


(Construction)




NOTES :
1. Specification:

- 1>. Operating force: 1000gMax
- 2>. Operating Temperature: -30° to+85°
- 3>. Storage Temperature: -40° to+85°
- 4>. Mechanical Life: 3000cycles minimum


2. PLATING:
GOLD FLASH 1u"(min.) SOLDERABLE,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

DISC XX T S G E T

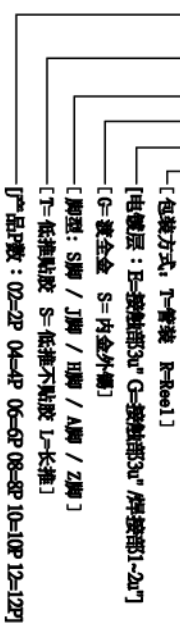

[Schematic]



Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY	TITLE
①	Actuator	UL94 V0	White	LINEAR .0 ± 0.10	ANGLES 0 ± 1°	
②	Cover	UL94 V0	Black	.00 ± 0.05	0 ± 0.5°	
③	Movable	Copper Alloy	3u"Gold	.000± 0.03	.00±	
④	Terminal	Brass	1u"Gold	DESIGN ER XIN LU	04/12/12	
⑤	Base	UL94 V0	Black	DRAWING		
⑥	Terminal Contact	Brass	3u"Gold	CHECK		

东莞市广智实业有限公司

BY DISC SERIES PITCH 2.54mm
TYPE HOUSING
PRODUCT FAMILY DISC SERIES
PRAT NO. DISCO4LHGET
FILE NO. DISCO4LHGET-A
SIZE UNIT SCALE SHEET REV.
A4 mm 2 : 1 10F1 A