





NOTES :  
 1. Specification:

- 1>. Operating force: 1000gMax
- 2>. Operating Temperature: -30° to+85°
- 3>. Storage Temperature: -40° to+85°
- 4>. Mechanical Life: 3000cycles minimum

2. PLATING:  
 GOLD FLASH 1u"(min.) SOLDERABLE,  
 3u" GOLD PLATING ON THE CONTACT AREA,  
 WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

DSIC XX T S G E T

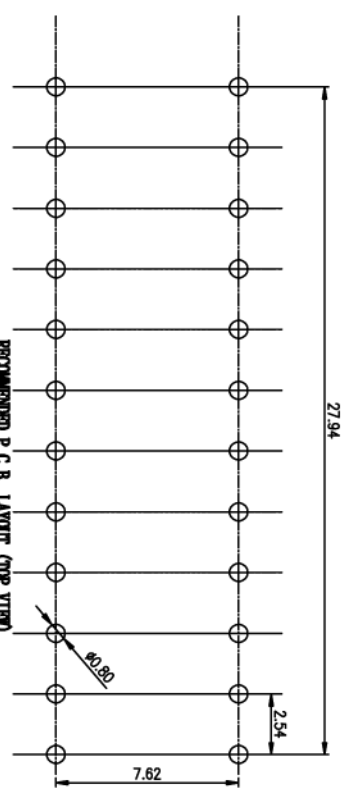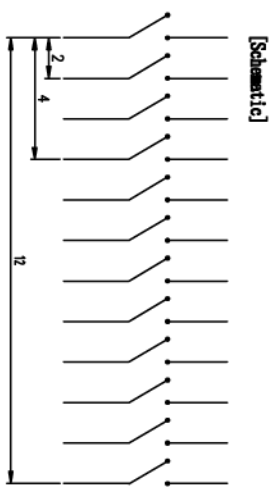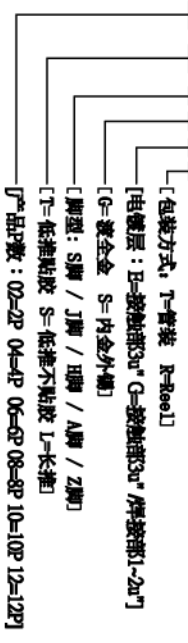

Number	Part Name	Material	Finished
①	Actuator	UL94 VO	White
②	Cover	UL94 VO	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 VO	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	
LINER	ANGLES	COPY	PROJECTION
.0 ± 0.10	0 ± 1°		
.00 ± 0.05	0 ± 0.5°		
.000± 0.03	.00±		
DESIGN	ER XIN LU		04/12/12
DRAWING			
CHECK			
APPRO.			

**东莞市广智实业有限公司**  
 BY DSIC SERIES PITCH 2.54mm  
 TYPE HOUSING  
 PRODUCT FAMILY DSIC SERIES  
 PRAT NO. DSIC12LHGET  
 FILE NO. DSIC12LHGET-A  
 SIZE UNIT SCALE SHEET REV.  
 A4 mm 2 : 1 10F1 A