
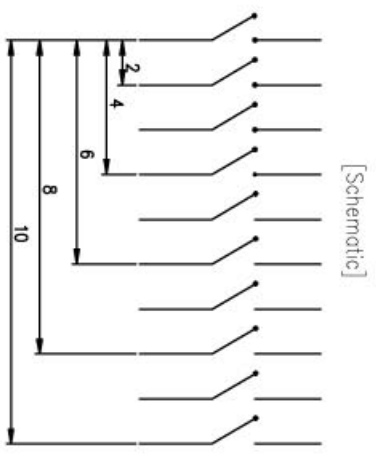

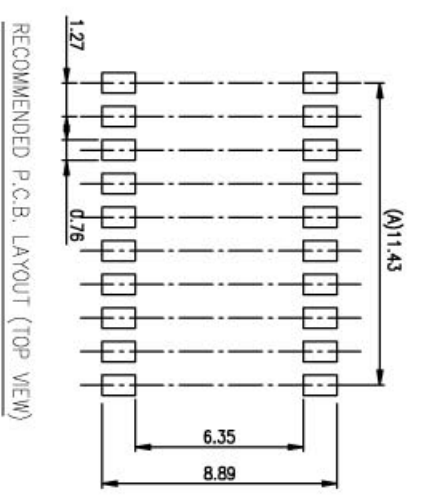
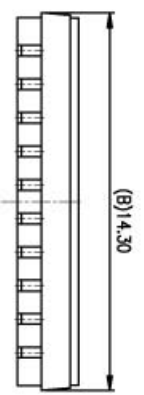



NOTES:
 1. Specification:

- 1> Operating force: 1000gf Max
- 2> Operating Temperature: -30° to +85°
- 3> Storage Temperature: -40° to +85°
- 4> Mechanical Life: 1000cycles minimum

- 2. PLATING:
 GOLD FLASH 1u" (min.) SOLDERTAL,
 3u" GOLD PLATING ON THE CONTACT AREA,
 WITH 50u" NICKEL UNDERPLATINGCOVERALL.
- 3. PART NUMBER DESCRIPTION :

DS HP XX T S G E T
 [Packing : T=Tube R=Reel]
 [Finish : E=3u" Gold-plated F=10u"Gold-plated]
 [Finish : G=Full Gold S=Contar-Gold-plated]
 [Terminal: S=SMD type J=J lead H=Straight A=Auto insert]
 [Tactuator: T=Tape sealed S=low profile W/0 Tape]
 [NO POP: 02=2P 04=4P 06=6P 08=8P 10=10P]
 [HP=Half-Pitch IC=IC type PV=Piano type]

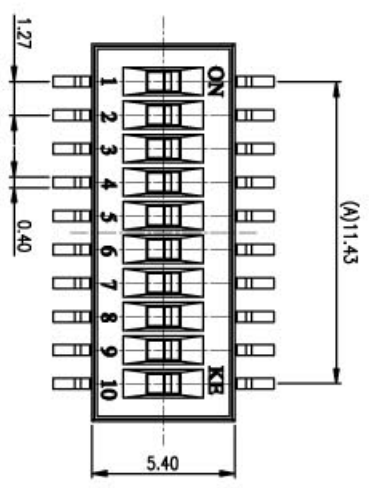

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY	TITLE
①	Actuator	UL94 V0	White	LINER 0 ± 0.25	ANGLES 0 ± 2°	BY DSHP SERIES PITCH 1.27mm TYPE HOUSING
②	Cover	UL94 V0	Black	0.0 ± 0.15	0 ± 1°	
③	Movable	Copper Alloy	3u"Gold	0.00± 0.10	0.0± 0.5°	PRODUCT FAMILY Dshp series
④	Terminal	Brass	1u"Gold	DESIGN	Kathy Lu	
⑤	Base	UL94 V0	Black	DRAWING		FILE NO. DSHP10TSGER-A
⑥	Terminal Contact	Brass	3u"Gold	CHECK		SIZE UNIT SCALE SHEET REV.
				APPRD.		A4 mm 2 : 1 10P.1 A

东莞市广誉实业有限公司