

典型性能 Typical performance

- ◆ 宽范围输入 Wide Input voltage range
- ◆ 转换效率 Typical Efficiency (典型 85%)
- ◆ 开关频率 Switching frequency: 100KHz
- ◆ 过流、短路保护, 自动恢复
Overcurrent/Short circuit protection, Self-furbish
- ◆ 输入与输出高隔离 Input-output isolate
- ◆ PCB 板上直插式安装 Board in-line type installs
- ◆ 金属外壳 Metal case


技术参数

测试条件: 如无特殊指定, 所有参数测试均在标称输入电压、纯阻性额定负载及 25℃ 室温环境下测得。

Technology parameter

Test condition: General Nominal Line, Tc=25 °C, Rated resistant load unless other wise specified

输入特性 Input	Min(Vac)	Nom(Vac)	Max(Vac)	Notes
输入电压 Vac	165(200Vdc)	220	265(380Vdc)	N
Input voltage	85(120Vdc)	220	265(380Vdc)	W
输入频率范围 Hz	47		440	
Frequency range				
遥控端 Remote ON/OFF	无遥控端			

输出特性 Output

输出电压精度 Voltage accuracy		Vo1; Vo2	±1.0%, ±3.0%
源效应 Line regulation	标称负载, 全电压范围	Vo1; Vo2	±0.2%; ±0.5%
负载效应 Load regulation	20% ~ 100%额定负载	Vo1; Vo2	±0.5%; ±3.0%
纹波及噪声 Ripple and noise	20MHz BM 满载		
	Vo≤5.0V, ≤80mVp-p	Vo≥48V, ≤180mVp-p	Other≤120 mVp-p
启动延迟时间 Turn-on delay time	典型值		1S

一般特性 General

转换效率 Efficiency	标称电压输入, 满载	Vo≤5.0V, 80%典型	Vo>5.0V, 82%典型
开关频率 Switching frequency		100KHz 典型	
工作温度 Operating temperature		自由空气对流 Free air	-25℃ ~ +65℃
储存温度 Storage temperature			-40℃ ~ +105℃
最大壳温 Max case temperature			+90℃

相对湿度 Relative humidity			10%~90%
外壳材料 case material			金属壳 Metal case
隔离电压 Isolation Voltage	输入与输出 Input-output $2.5KV \leq 1.5mA/1min$; 输入与外壳 Input- case 输入与 FG Input-FG $1.5KV \leq 1.5mA/1min$		
最小无故障间隔时间(MTBF)	2×10^5 Hrs		


典型产品列表 Typical product tabulates

型号 TYPE	输入电压范围 Input voltage range	输出电压/电流 (Output voltage / current)					
		VO1		VO2		VO3	
		V	mA	V	mA	V	mA
WA40-220S05K1	85~265VAC 120~380VDC	+5V	8000mA				
WA40-220S12K1		+12V	3300mA				
WA40-220S24K1		+24V	1660mA				
WA40-220D05K1		+5V	4000mA	-5V	4000mA		
WA40-220D12K1		+12V	1660mA	-12V	1660mA		
WA40-220D24K1		+24V	830mA	-24V	830mA		
WA50-220S05K1		+5V	10000mA				
WA50-220S12K1		+12V	4200mA				
WA50-220S24K1		+24V	2080mA				
WA50-220D05K1		+5V	5000mA	-5V	5000mA		
WA50-220D12K1		+12V	2080mA	-12V	2080mA		
WA50-220D24K1		+24V	1040mA	-24V	1040mA		

注：因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

due to space limitations ,the above list is only for some products, If other than a list of products, please contact the Company's sales department.


封装尺寸图 Mechanical Data

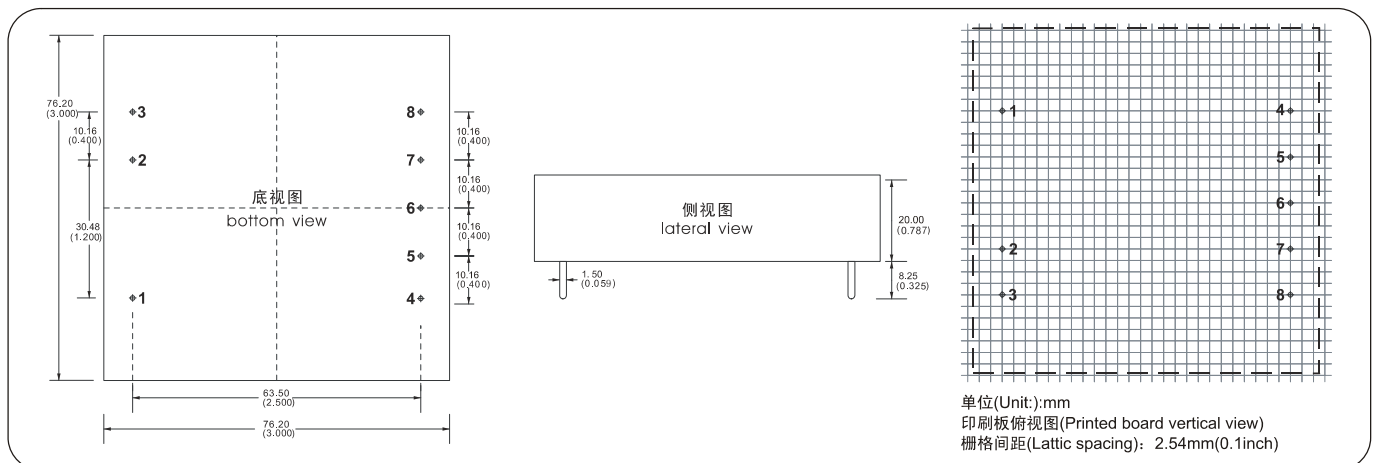

封装尺寸 Mechanical Data

封装代号	L x W x H	
K1	76.20x 76.20 x 20.00 mm	3.000 × 3.000 × 0.787inch

温度曲线图 Temperature graph

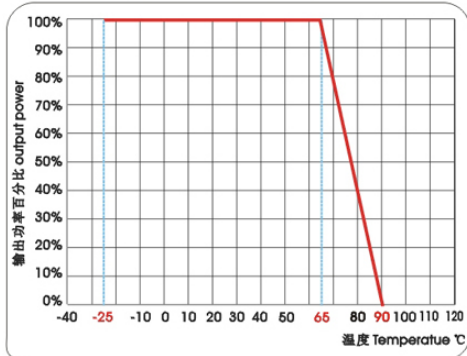

管脚定义 Pin Assignments

单路 (S)	1 FG	2 AC(N)	3 AC(L)	4 -S	5 TRIM	6 +S	7 GND	8 Vout
双路 (D)	1 FG	2 AC(N)	3 AC(L)	4 -Vout2	5 NP	6 COM	7 NP	8 Vout1

注意：电源模块的各管脚定义如与选型手册不符，应以实物标签上的标注为准。

Note: The power modules such as the definition of the pin does not match with the hand book, please refer to the actual item.