

# SEMIPONT® 1

## Power Bridge Rectifiers

#### **SKD 31**

#### **Features**


- Sturdy isolated metal baseplate
- · Fast-on terminals with solder tips
- · Suitable for wave soldering
- · High surge current ratings
- UL recognized, file no. E 63 532


### **Typical Applications**


- DC power supply, e.g. for transistorized AC motor controllers
- Battery chargers
- Non-controlled DC motor field supply
- Recommended snubber network: RC: 0.1  $\mu$ F, 50  $\Omega$  (P  $_{R}$  = 1 W)
- Freely suspended or mounted on an insulator
- 2) Mounted on a painted metal sheet of min. 250 x 250 x 1 mm


$V_{RSM}$	$V_{RRM}, V_{DRM}$	I <sub>D</sub> = 31 A (full conduction)
V	V	(T <sub>c</sub> = 100 °C)
200	200	SKD 31/02
400	400	SKD 31/04
800	800	SKD 31/08
1200	1200	SKD 31/12
1400	1400	SKD 31/14
1600	1600	SKD 31/16


Symbol	Conditions	Values	Units
I <sub>D</sub>	T <sub>c</sub> = 85 °C	44	Α
	T <sub>a</sub> = 45 °C; isolated <sup>1)</sup>	5,3	Α
	T <sub>a</sub> = 45 °C; chassis <sup>2)</sup>	17	Α
	T <sub>a</sub> = 45 °C; R4A/120 (P1A/120)	27 (32)	Α
	T <sub>a</sub> = 35 °C; P1A/120 F	56	Α
I <sub>FSM</sub>	T <sub>vi</sub> = 25 °C; 10 ms	370	Α
	T <sub>vi</sub> = 125 °C; 10 ms	320	Α
i²t	T <sub>vi</sub> = 25 °C; 8,3 10 ms ms	685	A²s
	T <sub>vj</sub> = 125 °C; 8,3 10 ms ms	510	A²s
V <sub>F</sub>	T <sub>vi</sub> = 25 °C; I <sub>F</sub> = 75 A	max. 1,75	V
V <sub>(TO)</sub>	T <sub>vi</sub> = 125 °C	max. 0,85	V
r <sub>T</sub>	T <sub>vi</sub> = 125 °C	max. 12	mΩ
I <sub>RD</sub>	$T_{vj}$ = 25 °C; $V_{DD}$ = $V_{DRM}$ , $V_{RD}$ = $V_{RRM}$	max. 0,2	mA
	$T_{vj}^{j}$ = 125 °C, $V_{DD} = V_{DRM}$ , $V_{RD} = V_{RRM}$	2	mA
R <sub>th(j-c)</sub>	per diode	2	K/W
· fn(j-c)	total	0,33	K/W
R <sub>th(c-s)</sub>	total	0,1	K/W
R <sub>th(j-a)</sub>	isolated 1) (chassis 2))	15 (3)	K/W
T <sub>vj</sub>	, ,	- 40 + 125 °C	°C
T <sub>stg</sub>		- 40 + 125 °C	°C
V <sub>isol</sub>	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 ( 3000 )	V
M <sub>s</sub>	to heatsink	2 ± 15 %	Nm
Mt			
m		66	g
Case		G 26	




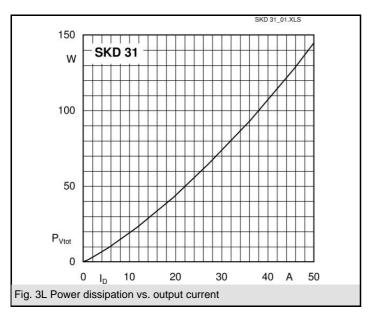

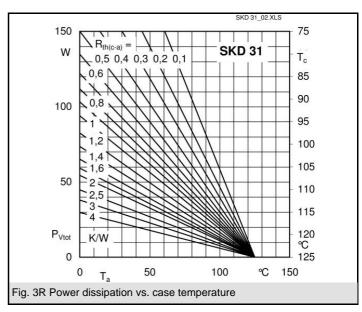


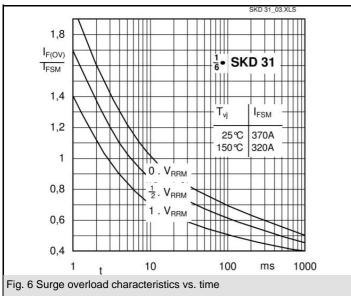


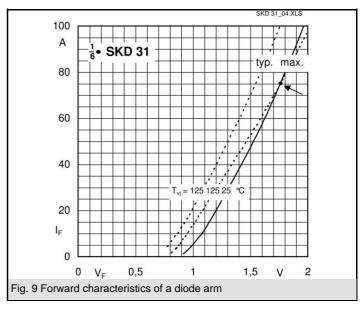

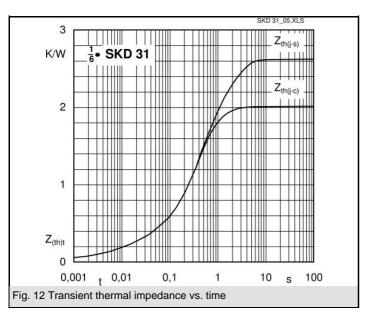

## **SKD 31**

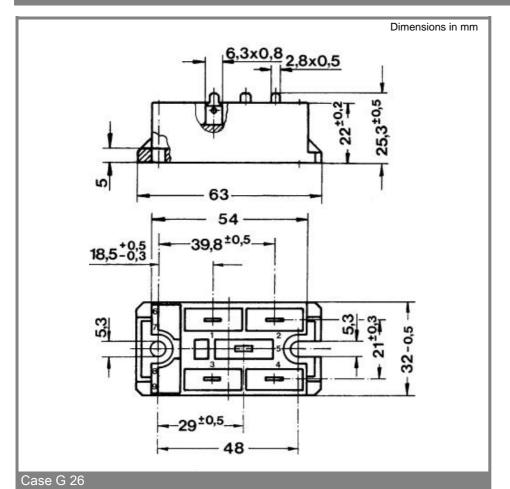



This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.



### This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download
Daily Updated Database
100% Free Datasheet Search Site
100% Free IC Replacement Search Site
Convenient Electronic Dictionary
Fast Search System

www.EEworld.com.cn