
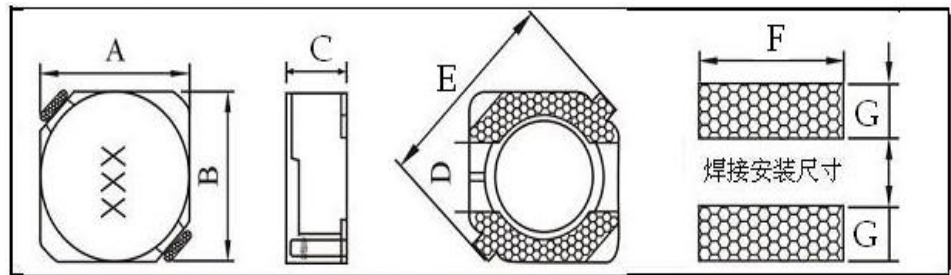


# Anruike 安瑞科 / SMD POWER INDUCTORS CD2D14 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (max)	B ( $\pm 0.3$ )	C (max)	D	E	F	G	载带盘装
CD2D14	3.3	3.3	1.6	1.0	4.5	3.5	1.3	4000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC ( $\Omega$ ) (Max)	额定电流 IDC (A) (Max)
CD2D14-1R5M	1.5	$\pm 20$	100KHz/0.25V	0.06	2.0
CD2D14-1R8M	1.8	$\pm 20$	100KHz/0.25V	0.07	2.15
CD2D14-2R2M	2.2	$\pm 20$	100KHz/0.25V	0.04	1.55
CD2D14-2R7M	2.7	$\pm 20$	100KHz/0.25V	0.045	1.20
CD2D14-3R3M	3.3	$\pm 20$	100KHz/0.25V	0.05	1.05
CD2D14-3R9M	3.9	$\pm 20$	100KHz/0.25V	0.06	0.93
CD2D14-4R7M	4.7	$\pm 20$	100KHz/0.25V	0.07	0.83
CD2D14-5R6M	5.6	$\pm 20$	100KHz/0.25V	0.09	0.75
CD2D14-6R8M	6.8	$\pm 20$	100KHz/0.25V	0.10	0.72
CD2D14-8R2M	8.2	$\pm 20$	100KHz/0.25V	0.18	0.63
CD2D14-100M	10	$\pm 20$	100KHz/0.25V	0.19	0.60
CD2D14-120M	12	$\pm 20$	100KHz/0.25V	0.22	0.55
CD2D14-150M	15	$\pm 20$	100KHz/0.25V	0.27	0.52
CD2D14-180M	18	$\pm 20$	100KHz/0.25V	0.32	0.50
CD2D14-220M	22	$\pm 20$	100KHz/0.25V	0.40	0.47
CD2D14-270M	27	$\pm 20$	100KHz/0.25V	1.04	0.45
CD2D14-330M	33	$\pm 20$	100KHz/0.25V	1.15	0.42
CD2D14-390M	39	$\pm 20$	100KHz/0.25V	1.66	0.40
CD2D14-470M	47	$\pm 20$	100KHz/0.25V	2.00	0.35
CD2D14-560M	56	$\pm 20$	100KHz/0.25V	2.15	0.28
CD2D14-680M	68	$\pm 20$	100KHz/0.25V	2.20	0.27
CD2D14-820M	82	$\pm 20$	100KHz/0.25V	2.30	0.26
CD2D14-101M	100	$\pm 20$	100KHz/0.25V	2.45	0.24
CD2D14-121M	120	$\pm 20$	100KHz/0.25V	2.50	0.22

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ: 1193940818