
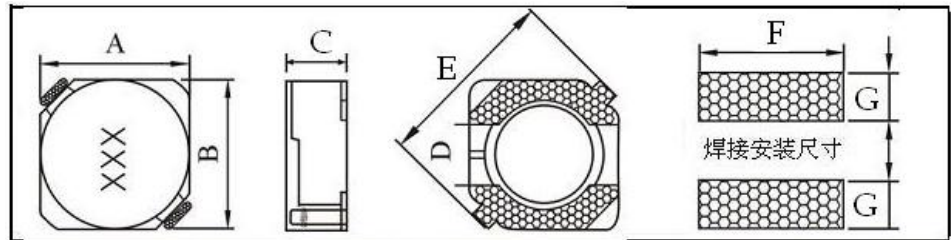


Anruike 安瑞科 / SMD POWER INDUCTORS CD4D28 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (max)	B (±0.3)	C (max)	D	E	F	G	载带盘装
CD4D28	5.0	5.0	3.0	1.5	6.9	5.3	1.9	2000PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD4D28-1R5M	1.5	±20	100KHz/0.25V	0.025	3.75
CD4D28-2R2M	2.2	±20	100KHz/0.25V	0.030	3.50
CD4D28-4R7M	4.7	±20	100KHz/0.25V	0.037	1.90
CD4D28-5R6M	5.6	±20	100KHz/0.25V	0.100	1.57
CD4D28-8R2M	8.2	±20	100KHz/0.25V	0.118	1.34
CD4D28-100M	10	±20	100KHz/0.25V	0.078	1.20
CD4D28-150M	15	±20	100KHz/0.25V	0.149	1.16
CD4D28-220M	22	±20	100KHz/0.25V	0.235	0.80
CD4D28-330M	33	±20	100KHz/0.25V	0.278	0.76
CD4D28-470M	47	±20	100KHz/0.25V	0.300	0.65
CD4D28-560M	56	±20	100KHz/0.25V	0.624	0.41
CD4D28-680M	68	±20	100KHz/0.25V	0.699	0.35
CD4D28-820M	82	±20	100KHz/0.25V	0.914	0.32
CD4D28-101M	100	±20	100KHz/0.25V	1.020	0.29
CD4D28-151M	150	±20	100KHz/0.25V	1.712	0.25
CD4D28-221M	220	±20	100KHz/0.25V	2.200	0.22
CD4D28-471M	470	±20	100KHz/0.25V	4.170	0.18

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818