



CHARACTERISTICS:

- 1) OPERATING VOLTAGE: 2.8V
- 2) OPERATING TEMPERATURE: 0°C TO 50°C.
- 3) STORAGE TEMPERATURE: -10°C TO 60°C.
- 4) DRIVING METHOD: 1/4DUTY, 1/2BIAS.
- 5) DISPLAY TYPE: TN/REFLECTIVE/POSITIVE.
- 6) VIEWING DIRECTION: 6 O'CLOCK.
- 7) CONNECTOR:

MECHANICAL TOL.±0.20 UNLESS SPECIFIED

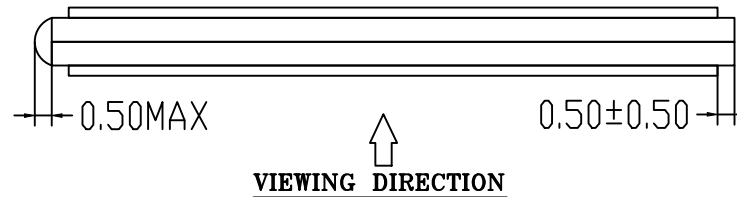

SCALE 1 : 1

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE	 PROJECTION	深圳市华彩胜液晶显示技术有限公司 Shen Zhen Huacai Sheng LCD Technology Co., Ltd			
COMPANY NAME			01	2014/06/19		APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
APPROVED BY		SHEEF 1 OF 2			HCS51749A	APPROVED BY			
DATE						DATE			
						DRAWN BY	D . H	UNIT IN mm	OUR REF.