


典型性能 Typical performance

宽范围输入 Wide Input voltage range
转换效率 Typical Efficiency (典型 80%)
开关频率 Switching frequency : 60-100 KHz
过流、短路保护, 自动恢复 Over current / Short circuit protection, Self-furbish
输入与输出高隔离 Input-output isolate
PCB 板上直插式安装 Board in-line type installs
塑壳或金属壳 Plastic/Metal case

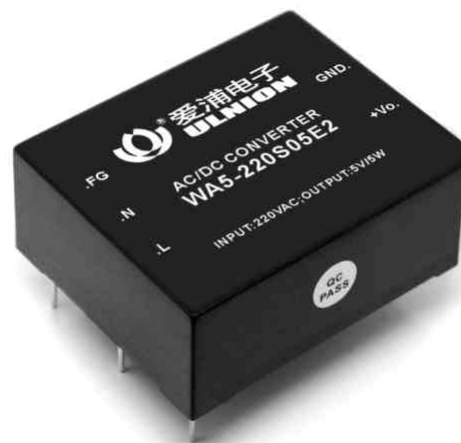

技术参数

测试条件 : 如无特殊指定, 所有参数测试均在标称输入电压、纯阻性额定负载及 25 室温环境下测得。

Technology parameter

Test condition: General Nominal Line, Tc= 25 ? , Rated resistant load unless other wise specified

输入特性 Input	Min (Vac)	Nom(Vac)	Max(Vac)	Notes
输入电压 Vac	165(200Vdc)	220	265(380Vdc)	N
Input voltage	85(120Vdc)	220	265(380Vdc)	W
输入频率范围 Frequency range	47		440	
遥控端 Remote ON/OFF	无遥控端			

输出特性 Output

输出电压精度 Voltage accuracy		Vo1 ; Vo2 , Vo3 ;	±1.0% , ±2.0%
源效应 Line regulation	标称负载, 全电压范围	Vo1 ; Vo2 , Vo3 ;	±0.2% ; ±0.5%
负载效应 Load regulation	20% ~ 100% 额定负载	Vo1 ; Vo2 , Vo3 ;	±0.5% ; ±3.0%
纹波及噪声 Ripple and noise	20MHz BM 满载		
	Vo 5.0V, 80mVp-p	Vo 48V, 180mVp-p	Other 120 mVp-p
启动延迟时间 Turn-on delay time	典型值		1S

一般特性 General

转换效率 Efficiency	标称电压输入, 满载	Vo 5.0V, 78% 典型	Vo>5.0V , 80% 典型
开关频率 Switching frequency		60-100KHz 典型	
工作温度 Operating temperature		自由空气对流 Free air	-25 ~ +65
储存温度 Storage temperature			-40 ~ +105
最大壳温 Max case temperature			+90
相对湿度 Relative humidity			10%~90%
外壳材料 case material			塑壳(E2)或金属壳(E1) Plastic/Metal case

隔离电压 Isolation Voltage	输入与输出 Input-output 2.5KV 1.5mA/1min ; 输入与外壳 Input- case 输入与 FG Input-FG 1.5KV 1.5mA/1min
最小无故障间隔时间(MTBF)	2X10 ⁵ Hrs


典型产品列表 Typical product tabulates

型号 TYPE	输入电压范围 Input voltage range	输出电压/电流 (Output voltage / current)					
		VO1		VO2		VO3	
		V	mA	V	mA	V	mA
WA5-220S05E1/E2	85~265VAC 120~380VDC	5V	1000mA				
WA5-220S12E1/E2		12V	420mA				
WA5-220S24E1/E2		24V	210mA				
WA5-220D05E1/E2		+5V	500mA	-5V	500mA		
WA5-220D12E1/E2		+12V	210mA	-12V	210mA		
WA5-220D24E1/E2		+24V	100mA	-24V	100mA		
WA10-220S05E1/E2		5V	2000mA				
WA10-220S12E1/E2		12V	840mA				
WA10-220S24E1/E2		24V	420mA				
WA10-220D05E1/E2		+5V	1000mA	-5V	1000mA		
WA10-220D12E1/E2		+12V	420mA	-12V	420mA		
WA10-220D24E1/E2		+24V	210mA	-24V	210mA		

注：因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

due to space limitations ,the above list is only for some products, If other than a list of products, please contact the Company's sales department.


Typical products tabulates/ 典型产品列表

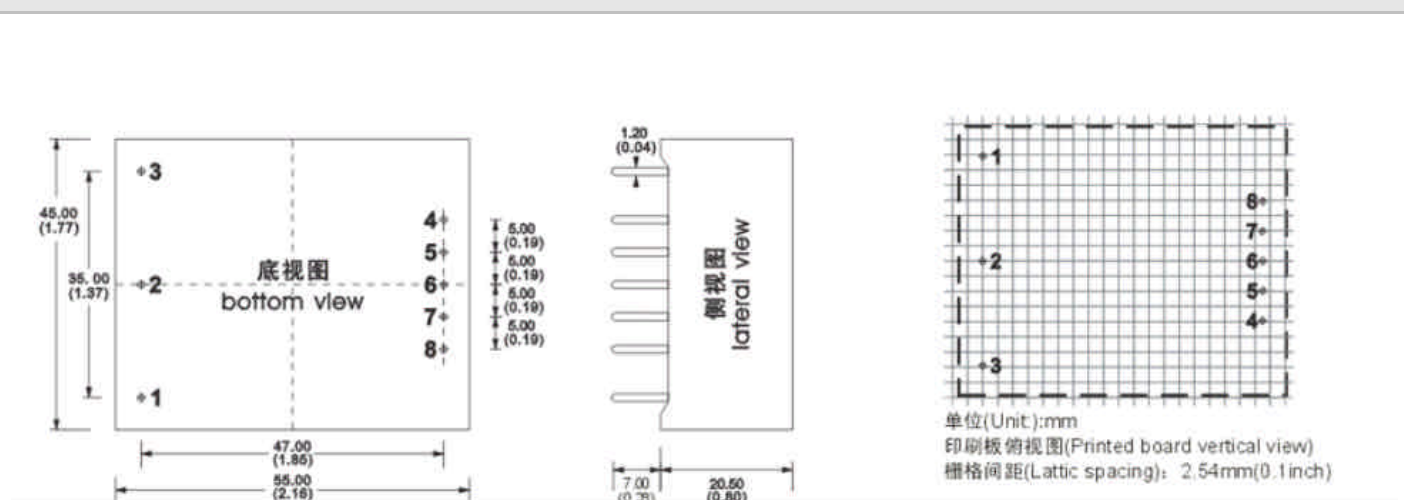

封装尺寸 Mechanical Data

封装代号	L x W x H
------	-----------

温度曲线图 Temperature graph

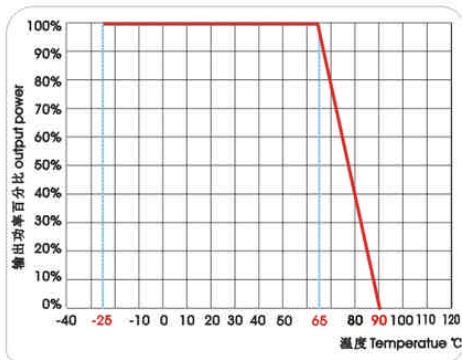

管脚定义 Pin Assignments

管脚说明	1	2	3	4	5	6	7	8
单路 (S)	FG	AC(N)	AC(L)	+Vo	NP	NP	NP	GND
双路 (D)	FG	AC(N)	AC(L)	+Vo1	NP	COM	NP	-Vo2

注意：电源模块的各管脚定义如与选型手册不符，应以实物标签上的标注为准。

Note : The power modules such as the definition of the pin does not match with the hand book, please refer to the actual item.