
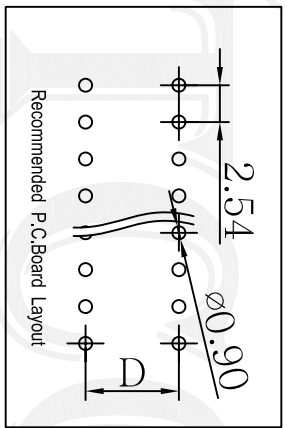
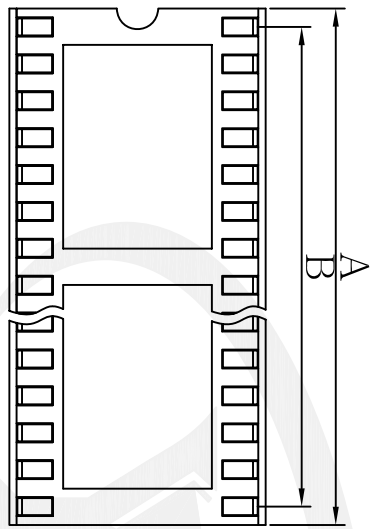
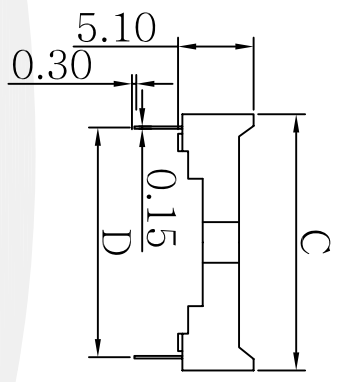


Rev No	Revision note	Date	Signature	Checked
A/0				

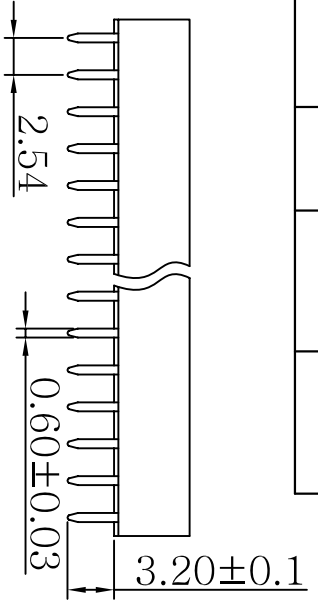

No. Of Positions	A	B	C	D
6	7.62	5.08	10.02	7.62
8	10.16	7.62	10.02	7.62
14	17.78	15.24	10.02	7.62
16	20.32	17.78	10.02	7.62
18	22.86	20.32	10.02	7.62
20	25.40	22.86	10.02	7.62
24	30.48	27.94	10.02	7.62
24	30.48	27.94	17.64	15.24
28	35.56	33.02	10.02	7.62
28	35.56	33.02	17.64	15.24
32	40.64	38.10	17.64	15.24
40	50.80	48.26	17.64	15.24
42	53.34	50.80	17.64	15.24
48	60.96	58.42	17.64	15.24
64	81.28	78.74	26.00	22.86

NOTES:
SPECIFICATION
 Current Rating: 2.0 Ampereper Contact
 Contact Resistance: 20 Milliohms Max
 Insulation Resistance: 1000 Megohms Min
 Dielectric Withstanding Voltage: 500V AC
 Operation Temperature: -40 °C ~ +105 °C
Material
 Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PBT (UL94V-0)

Width
 3=7.62mm
 4=10.16mm
 6=15.24mm
 9=22.86mm

NO. of Pins
 Contact Plating
 G0=Gold Flash
 G1=3u" Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 SN=Tin

7151-X XX S XX10

THIS DRAWING IS A CONTROLLED DOCUMENT

DMN	JACK	DATE	OCT 05 2006
CHK	MIKE	DATE	OCT 05 2006
APPD	PETER	DATE	OCT 05 2006

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLG	±	—
1 PLG	±	0.20
3 PLG	±	0.25
4 PLG	±	0.30

ANGLES ± 3°

UNIT: MM SCALE: 2:1 SIZE: A4

FILE PATH: 00871

YTCO YTCO TECHNOLOGY
 HTTP://WWW.YTCO.CO

TITLE: 2.54mm IC Socket Connector, Straight DIP
 PART NO.: 7151-XXXXSX10
 DRAWING NO.: YT-7151S1

SHEET 1 OF 1 REV A

4 3 2 1