
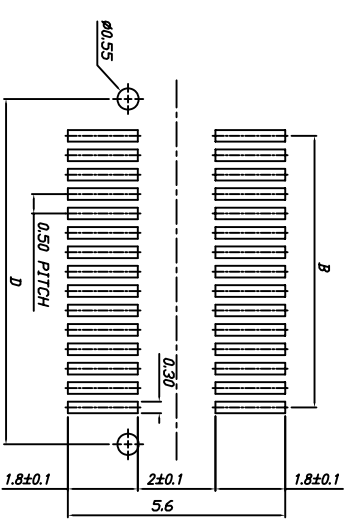
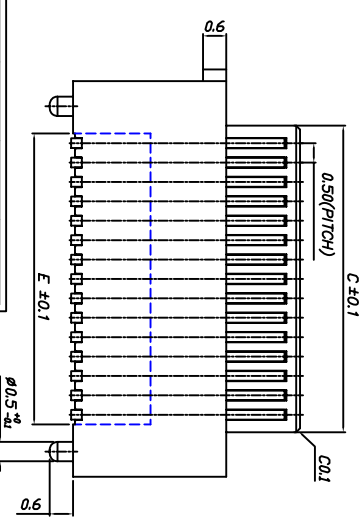

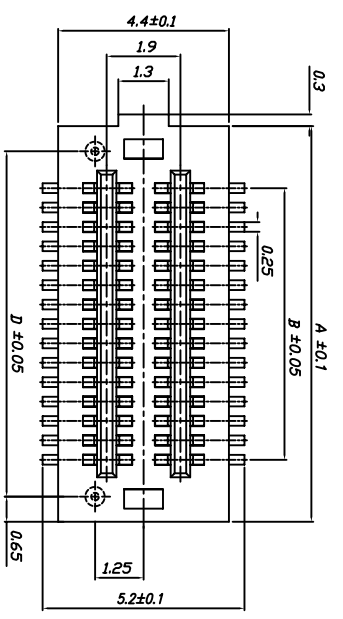


1	2	3	4	5	6	7	8	9	10
NO	변경 사항	수정 내용	비고	수정 일자	승인	일시			
1									
2									
3									



HIGH	PLUG(H2)	SOCKET(H1)
7.0	4.0	3.0
7.5	4.0	3.5
8.0	4.0	4.0
8.5	4.0	4.5

	A	B	C	D	E		A	B	C	D	E
08P	4.70	1.50	2.40	3.40	2.00	36P	11.70	8.50	9.40	10.40	9.00
10P	5.20	2.00	2.90	3.90	2.50	38P	12.20	9.00	9.90	10.90	9.50
12P	5.70	2.50	3.40	4.40	3.00	40P	12.70	9.50	10.40	11.40	10.00
14P	6.20	3.00	3.90	4.90	3.50	42P	13.20	10.00	10.90	11.90	10.50
16P	6.70	3.50	4.40	5.40	4.00	44P	13.70	10.50	11.40	12.40	11.00
18P	7.20	4.00	4.90	5.90	4.50	46P	14.20	11.00	11.90	12.90	11.50
20P	7.70	4.50	5.40	6.40	5.00	48P	14.70	11.50	12.40	13.40	12.00
22P	8.20	5.00	5.90	6.90	5.50	50P	15.20	12.00	12.90	13.90	12.50
24P	8.70	5.50	6.40	7.40	6.00	60P	17.70	14.50	15.50	16.40	15.00
26P	9.20	6.00	6.90	7.90	6.50	70P	20.20	17.00	18.00	18.90	17.50
28P	9.70	6.50	7.40	8.40	7.00	80P	22.70	19.50	20.50	21.40	20.00
30P	10.20	7.00	7.90	8.90	7.50	90P	25.20	22.00	23.00	23.90	22.50
32P	10.70	7.50	8.40	9.40	8.00	100P	27.70	24.50	25.50	26.40	25.00
34P	11.20	8.00	8.90	9.90	8.50						

Min:0.03^{mm} Gold plating over Min:1.2^{mm} Nickel

DRAWG NO		PART NAME		MATERIAL		SPECIFICATION		TREATMENT		REFERENCE	
		PLUG		PA 6T		CS2108-S1 : (#2 phosphor bronze)		NO.5mm PLUG-LK			
THICKNESS		SCALE		UNIT		TOLERANCE		WK NAME		PART NAME	
PROJECTION		M/S		mm		L26-008		0.5mm BOARD TO BOARD		DRAWING NO.	
APPROVAL		DESIGN		CHECK		DRAW					
DATE		REVISION		SIGN							