


CUT OUT

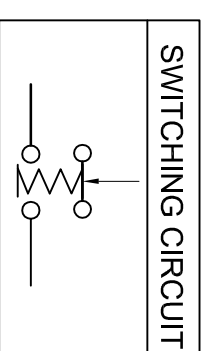

Nut Torque: 5 ~ 14Nm  
 Operating Pressure: 400gf ±200gf  
 Operating Stroke: 1.9mm±0.5  
 Protection Grade: IP67, IK08  
 Function: (ON)-OFF  
 Contact: Silver Alloy  
 Base: PA66  
 Shell \ Button: Brass, Ni Plating \ SUS  
 Rating: 5A 250V AC  
 Contact Resistance: 50mΩ MAX.  
 Insulation Resistance: 100MΩ MIN.  
 Dielectric Strength: 2000VAC 1Am of 1 minute  
 Electrical life: 100,000 cycles  
 Mechanical life: 500,000 cycles  
 Operating Temperature: -20°C~80°C  
 Safety Approval:

## 深圳宏源开泰科技发展有限公司

		公差 TOLERANCES		.X± 0.5 .XX± 0.15		角度 ANGLE ±1°		单位 DIMENSION UNIT		mm.	
		版本 VERSION		A0		日期 DATE		品名 TITLE		图号 DRAWING NO	
		核 准 CHECKED BY				绘图 DATE		刘淦洋			
		日期 DATE		2013.12.18		日期 DATE		2013.12.18			
		ECN NO.		N/A		绘图 DATE		刘淦洋			
		变更说明 CHANGE DESCRIPTION				日期 DATE		刘淦洋			
		版本 VER		A0		日期 DATE		刘淦洋			
		新发行				日期 DATE		刘淦洋			