


**SF21 – SF28**



**2.0A SUPER-FAST RECTIFIER**

## Features

- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability

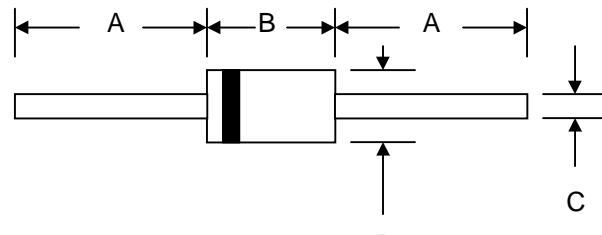

## Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.40 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

DO-15		
Dim	Min	Max
A	25.4	—
B	5.50	7.62
C	0.71	0.864
D	2.60	3.60

All Dimensions in mm

## Maximum Ratings and Electrical Characteristics $\text{@T}_A=25^\circ\text{C}$ unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.

Characteristic	Symbol	SF21	SF22	SF23	SF24	SF25	SF26	SF28	Unit	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	50	100	150	200	300	400	600	V	
RMS Reverse Voltage	V <sub>R(RMS)</sub>	35	70	105	140	210	280	420	V	
Average Rectified Output Current (Note 1) $\text{@T}_A = 55^\circ\text{C}$	I <sub>O</sub>	2.0						A		
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	50						A		
Forward Voltage $\text{@I}_F = 2.0\text{A}$	V <sub>FM</sub>	0.95			1.3		1.7	V		
Peak Reverse Current $\text{@T}_A = 25^\circ\text{C}$ At Rated DC Blocking Voltage $\text{@T}_A = 100^\circ\text{C}$	I <sub>RM</sub>	5.0 100						$\mu\text{A}$		
Reverse Recovery Time (Note 2)	t <sub>rr</sub>	35						nS		
Typical Junction Capacitance (Note 3)	C <sub>j</sub>	60		30		pF				
Operating Temperature Range	T <sub>j</sub>	-65 to +125						$^\circ\text{C}$		
Storage Temperature Range	T <sub>TG</sub>	-65 to +150						$^\circ\text{C}$		

\*Glass passivated forms are available upon request

- Note:
1. Leads maintained at ambient temperature at a distance of 9.5mm from the case
  2. Measured with IF = 0.5A, IR = 1.0A, IRR = 0.25A. See figure 5.
  3. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

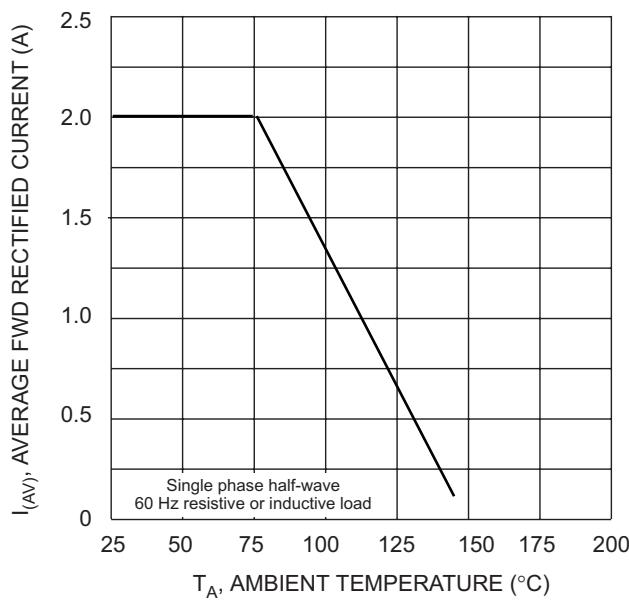


Fig. 1 Forward Current Derating Curve

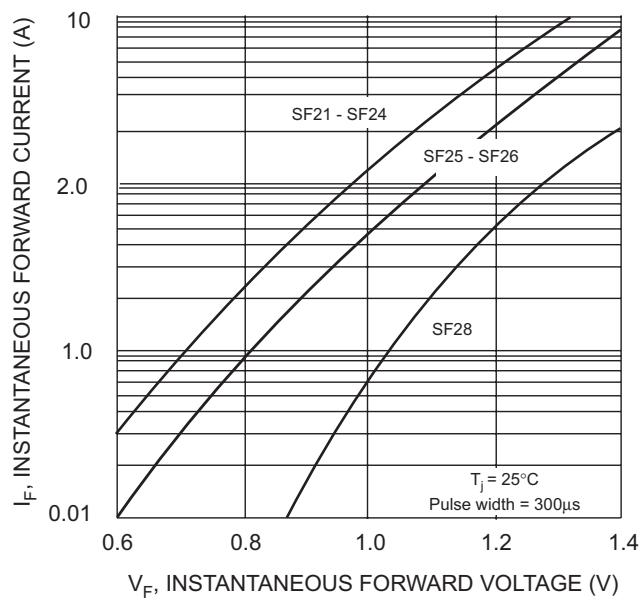


Fig. 2 Typical Forward Characteristics

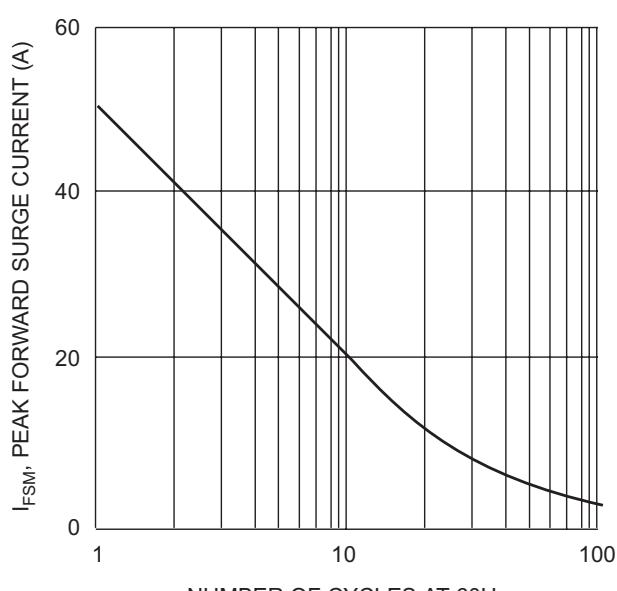


Fig. 3 Peak Forward Surge Current


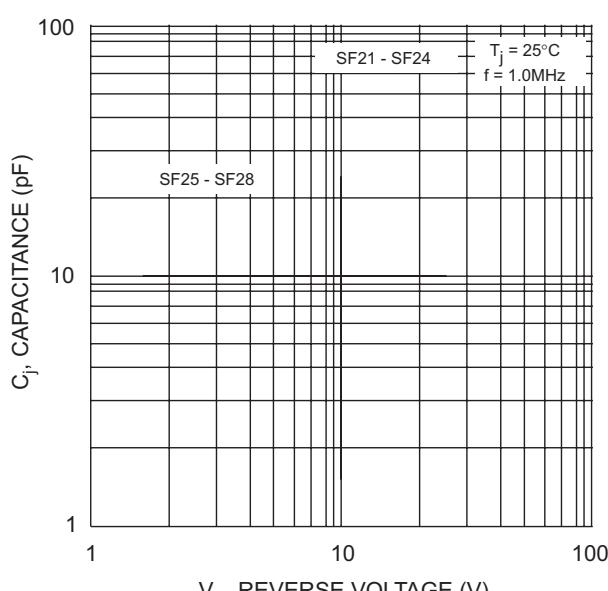


Fig. 4 Typical Junction Capacitance

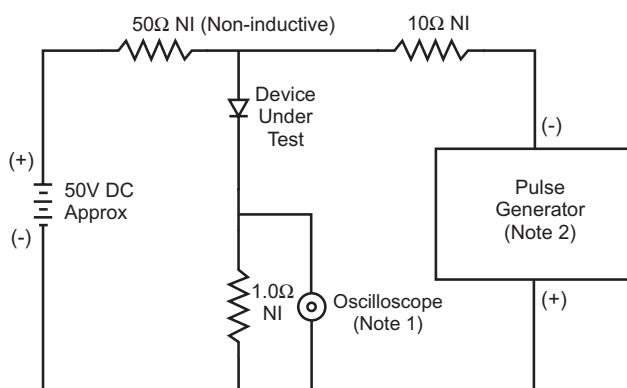

## Notes:

1. Rise Time = 7.0ns max. Input Impedance = 1.0MΩ, 22pF.
2. Rise Time = 10ns max. Input Impedance = 50Ω.

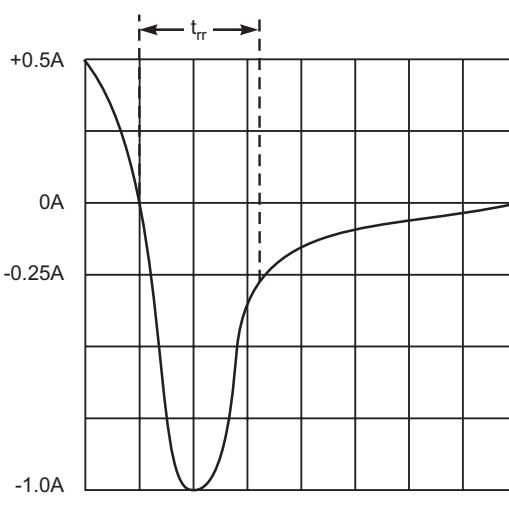


Fig. 5 Reverse Recovery Time Characteristic and Test Circuit