創爲精密材料股份有限公司

AMT PRODUCT STANDARD

Doc No:	AS-09556-02		Doc Rev:2.0
	SPECIFICATIONS OF ANALOG RE	SISTIVE	Date Released:
Title:	TOUCH SCREEN		Feb. 27, 2009
	Model Name: 9556	Size:8.00"	Page.1 of 7

Analog Touch Screen Specification

Manufacturer: Apex Material Technology Corp.

Model Name: 9556

1. Mechanical Dimensions and Construction

1.1 General: Analog Resistive touch screen is laminated by ITO film to ITO glass.

1.2 Mechanical Performance:

1.2.1 Surface Hardness: 3H

1.2.2 ITO Glass Thickness: 1.10mm


1.2.3 Tail Type: FPC

1.2.4 Surface Finish Type: Anti-glare

1.3 Input Method and Activation Force

Input Method	Average Activation Force
1.6mm dia. Delrin stylus	0.10~0.70N
16mm dia. Silicone "finger"	0.10~0.80N

Touch screen side view:

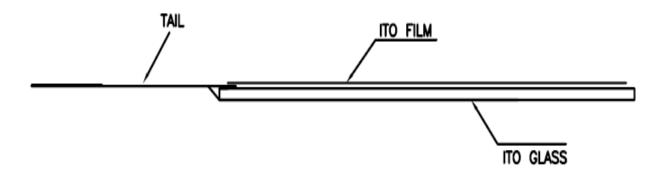

Remarks: This Model is with Anti-Newton Ring design.

創爲精密材料股份有限公司

AMT PRODUCT STANDARD

Doc No:	AS-09556-02		Doc Rev:2.0
SPECIFICATIONS OF ANALOG RESISTIVE		Date Released:	
Title:	Title: TOUCH SCREEN		Feb. 27, 2009
	Model Name: 9556	Size:8.00"	Page.2 of 7

2. Typical Optical Characteristics

2.1 Visible Light Transmission: $82 \pm 3\%$

2.2 Haze: $9.5 \pm 4\%$

3. Electrical Specifications

3.1 Operating Voltage: 5.5V or less

3.2 Contact current: 40mA (maximum)

3.3 Circuit close resistance: X-Axis (Between pin1 & pin3): $350\sim1050\Omega$

Y-Axis (Between pin2 & pin4): $150\sim700\Omega$

3.4 Circuit open resistance: $> 10M\Omega$ at 25VDC

3.5 Contact bounce: < 10ms

3.6 Linear Test : <1.5 %

3.7 Capacitance:100nF(maximum)

3.8 Electrostatic Discharge Protection : (per EN 61000-4-2)

The touch screen can withstand 15KV air discharge and 8KV contact discharge.

4. Linearity

4.1 Linear Test Specification

Direction X: <1.5 %

Direction Y: <1.5 %

4.2 Linearity Test


Apply voltage (DC5V) to upper (or lower) electrodes, output voltage Vx (see Fig.4-1) or Vy (see Fig.4-2) on the other electrodes is measured at every regular intervals.

Linearity is the value of max. error voltage (see Fig. 4-3).

創爲精密材料股份有限公司

AMT PRODUCT STANDARD

Doc No:	AS-09556-02		Doc Rev:2.0
SPECIFICATIONS OF ANALOG RESISTIVE		Date Released:	
Title:	TOUCH SCREEN		Feb. 27, 2009
	Model Name: 9556	Size:8.00"	Page.3 of 7

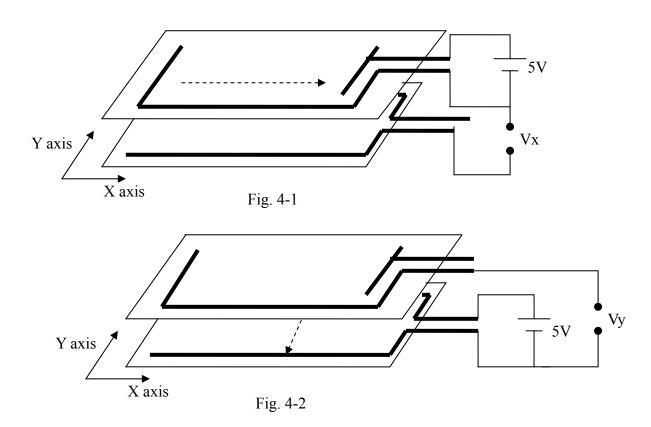

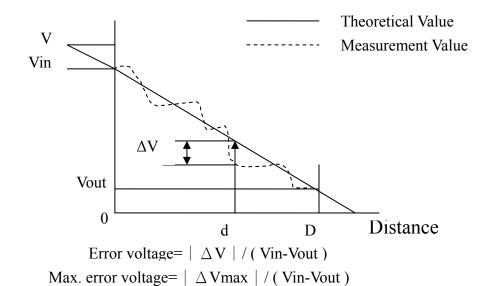


Fig. 4-3

創爲精密材料股份有限公司

AMT PRODUCT STANDARD

Doc No:	AS-09556-02		Doc Rev:2.0
SPECIFICATIONS OF ANALOG RESISTIVE		Date Released:	
Title:	TOUCH SCREEN		Feb. 27, 2009
	Model Name: 9556	Size:8.00"	Page.4 of 7

5. Environmental Specifications

5.1 Operating Temperature: -20° C $\sim +70^{\circ}$ C If temperature over 60° C, minimum 24 hours operating confirmed.

5.2 Storage Temperature: -40° C $\sim +80^{\circ}$ C

5.3 Humidity: if temp. $\geq 20^{\circ}$ C, see Fig.5 below

if temp. < 20° C, humidity less than 90% RH

No dew condensation

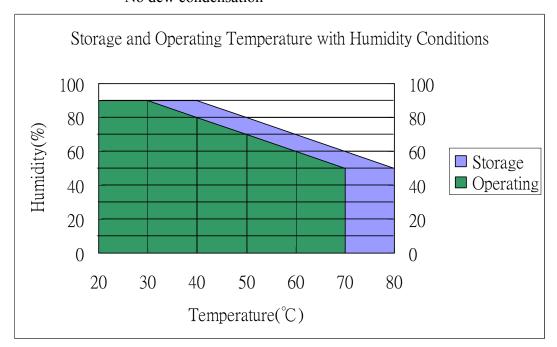


Fig.5 Storage and Operating Temperature with Humidity Conditions

6. Reliability Test

6.1 Exposure to high temperature

Touch panel is put into a test machine at the condition of 80°C for 288hours. Then it is left at room temperature for 24 hours or more. The measurement must satisfy the following:

- Circuit close resistance: as Sec. 3.3- Circuit open resistance: as Sec. 3.4

- Contact bounce: as Sec. 3.5 - Linearity test: as Sec. 3.6

創爲精密材料股份有限公司

AMT PRODUCT STANDARD

Doc No:	AS-09556-02		Doc Rev:2.0
SPECIFICATIONS OF ANALOG RESISTIVE		Date Released:	
Title:	TOUCH SCREEN		Feb. 27, 2009
	Model Name: 9556	Size:8.00"	Page.5 of 7

6.2 Exposure to low temperature

Touch panel is put into a test machine at the condition of -40° C for 288 hours. Then it is left at room temperature for 24 hours or more. The measurement must satisfy the following:

- Circuit close resistance: as Sec. 3.3- Circuit open resistance: as Sec. 3.4

- Contact bounce: as Sec. 3.5 - Linearity test: as Sec. 3.6

6.3 Exposure to constant temperature and humidity

Touch panel is put into a test machine at the condition of 50°C, 80%RH for 288 hours. Then it is left at room temperature for 24 hours or more. The measurement must satisfy the following:

- Circuit close resistance: as Sec. 3.3- Circuit open resistance: as Sec. 3.4

- Contact bounce: as Sec. 3.5 - Linearity test: as Sec. 3.6

6.4 Thermal Shock

Touch panel is put into a test machine at the condition of -40°C for 30 minutes, and then 80°C for 30 minutes. The process is repeated by 10 cycles. Then it is left at room temperature for 24 hours or more. The measurement must satisfy the following:

- Circuit close resistance: as Sec. 3.3- Circuit open resistance: as Sec. 3.4

Contact bounce: as Sec. 3.5Linearity test: as Sec. 3.6

7. Durability test:

7.1 Finger touches

Touch panel is hit 10 millions times with a silicone rubber of R8 finger(see Fig.7-1), hitting rate is by 250g at 2 times per second. The measurement must satisfy the following:

創爲精密材料股份有限公司

AMT PRODUCT STANDARD

Doc No:	AS-09556-02		Doc Rev:2.0
	SPECIFICATIONS OF ANALOG RESI	STIVE	Date Released:
Title:	TOUCH SCREEN		Feb. 27, 2009
	Model Name: 9556	Size:8.00"	Page.6 of 7

- Circuit close resistance: as Sec. 3.3- Circuit open resistance: as Sec. 3.4

Contact bounce: as Sec. 3.5Linearity test: as Sec. 3.6

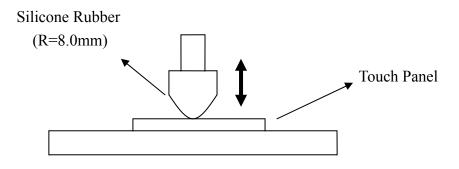


Fig. 7-1

7.2 Stylus writing

Touch panel is drawn by R0.8 Derlin stylus pen, at 250g forces, repeat one inch by 200K times(see Fig.7-2). The measurement must satisfy the following:

- Circuit close resistance: as Sec. 3.3- Circuit open resistance: as Sec. 3.4

- Contact bounce: as Sec. 3.5 - Linearity test: as Sec. 3.6

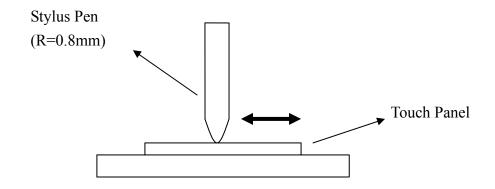


Fig. 7-2

創爲精密材料股份有限公司

AMT PRODUCT STANDARD

Doc No:	: AS-09556-02		Doc Rev:2.0
Title:	SPECIFICATIONS OF ANALOG RE TOUCH SCREEN	SISTIVE	Date Released: Feb. 27, 2009
1100.	Model Name: 9556	Size:8.00"	Page.7 of 7

8. Optical Performance

- 8.1 Optical inspection method and optical defect standards refer to AMT document A001 updated version; "Touch Screen Optical Quality Standard."
- 8.2 Outside to Viewing Area: any optical defects in this area need to be ignored if no touch screen function is affected.

9. Others

- 9.1 Always store the touch screen in its original shipping container under normal conditions (Temperature 20~25°C; Humidity ≤65%RH).
- 9.2 This Model is RoHS compliant.