

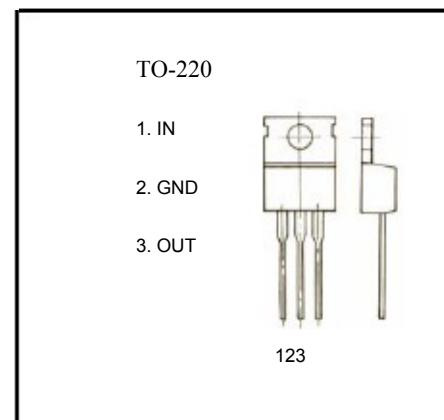
TO-220 Plastic-Encapsulate Voltage Regulator

7918 Three-terminal positive voltage regulator

FEATURES

Maximum Output current I_{OM} : 1.5 AOutput voltage V_o : -18 V

Continuous total dissipation

 $P_D: \begin{cases} 2 \text{ W } (T_J = 25) \\ 15 \text{ W } (T_c = 25) \end{cases}$


ABSOLUTE MAXIMUM RATINGS(Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	±5	V
Thermal resistance junction-air	$R_{\theta JA}$	65	/W
Thermal resistance junction-cases	$R_{\theta JC}$	5	/W
Operating Junction Temperature Range	T_{OPR}	0-150	
Storage Temperature Range	T_{STG}	-65-150	

ELECTRICAL CHARACTERISTICS($V_i=27V, I_o=500mA, 0 < T_J < 125, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_J=25$	±7.3	±8	±8.7	V
		$21V \leq V_i \leq 33V, I_o=5mA-1A$ $P_o \leq 15W$	±7.1	±8	±8.9	V
Load Regulation	ΔV_o	$T_J=25, I_o=5mA-1.5A$		12	360	mV
		$T_J=25, I_o=250mA-750mA$		4	180	mV
Line regulation	ΔV_o	$21V \leq V_i \leq 33V T_J=25$		15	360	mV
		$24V \leq V_i \leq 30V T_J=25$		5	180	mV
Quiescent Current	I_q	$T_J=25$		4.5	8	mA
Quiescent Current Change	ΔI_q	$21V \leq V_i \leq 33V$			1	mA
	ΔI_q	$5mA \leq I_o \leq 1A$			0.5	mA
Output voltage drift	V_o/ T	$I_o=5mA$		-1		mV/
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$		110		uV
Ripple Rejection	RR	$22V \leq V_i \leq 32V, f=120Hz, T_J=25$	53	69		dB
Dropout Voltage	V_d	$T_J=25, I_o=1A$		2		V
Output resistance	R_o	$f=1KHz$		22		$m\Omega$
Short Circuit Current	I_{SC}	$V_i=35V, T_J=25$		200		mA
Peak Current	I_{PK}	$T_J=25$		2.1		A

TYPICAL APPLICATION

