

**S8550 TRANSISTOR (PNP)****FEATURE**

Power dissipation

 P_{CM} : 0.625 W (Tamb=25°C)

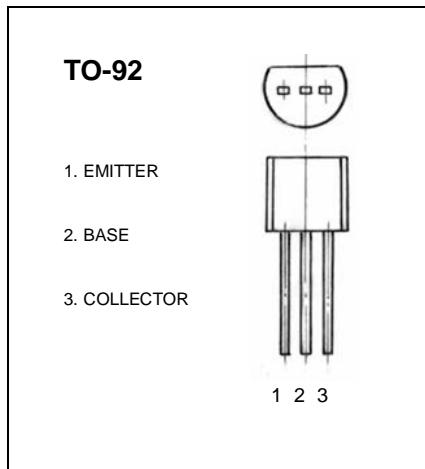
Collector current

 I_{CM} : -0.5 A

Collector-base voltage

 $V_{(BR)CBO}$: -40 V

Operating and storage junction temperature range

 T_J, T_{stg} : -55°C to +150°C**ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)**

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V(BR)_{CBO}$	$I_C = -100\mu A, I_E = 0$	-40			V
Collector-emitter breakdown voltage	$V(BR)_{CEO}$	$I_C = -0.1 \text{ mA}, I_B = 0$	-25			V
Emitter-base breakdown voltage	$V(BR)_{EBO}$	$I_E = -100\mu A, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -40V, I_E = 0$			-0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE} = -20V, I_B = 0$			-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -3V, I_C = 0$			-0.1	μA
DC current gain	$h_{FE(1)}$	$V_{CE} = -1V, I_C = -50mA$	85		300	
	$h_{FE(2)}$	$V_{CE} = -1V, I_C = -500mA$	50			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -500mA, I_B = -50mA$			-0.6	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -500mA, I_B = -50mA$			-1.2	V
Transition frequency	f_T	$V_{CE} = -6V, I_C = -20mA$ $f = 30MHz$	150			MHz

CLASSIFICATION OF $h_{FE(1)}$

Rank	B	C	D
Range	85-160	120-200	160-300